131

(131)

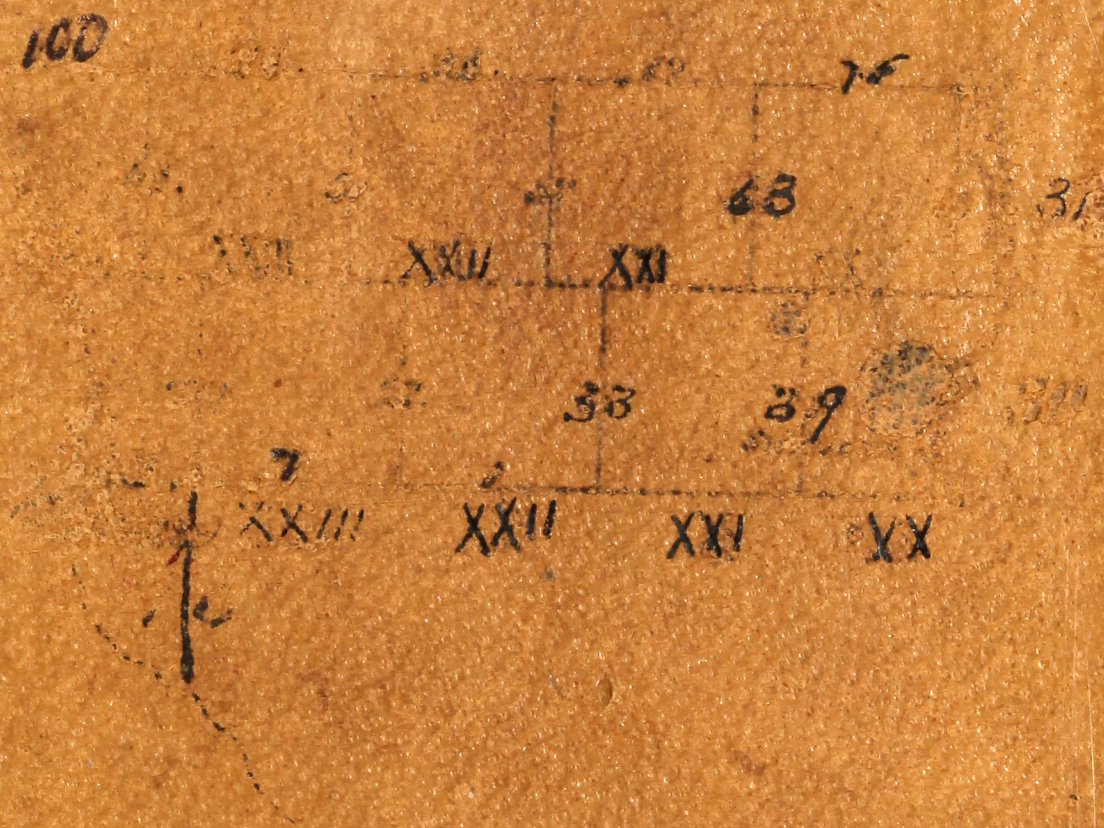

M2

Between Trun.l 29 & 30 north 7.
Range 23. West 4th mer. Min. Surys.

West between Sec.l 1 & 36
Var. 11° 15'

12.34 To Lake established for meander corner
B. Oak 12 In dia

40.00 Quarter Section corner in Lake

80.00 Section corner in Lake

Octo 16th

8. Between Trn's. 29 & 30 North. Mb
Range 23 West 4th Mer. Mini. Terry

	West between Sec's. 2 & 35
	Var —
7.48	Over Lake & Set meander post.
	Wht Oak 20 N. 55 W. 134
	Wht Oak 18 S. 30 W. 54
40.00	Set post at gr Section corner
	Br Oak 20 East 27
	B. Oak 10 N. 18 W. 159
80.00	Set post at corner to Sections
	2. 3. 34 & 35
	Br Oak 15 N. 55 E. 38
	B. Oak 12 N. 39 W. 54
	B. Oak 13 S. 40 W. 114
	Br. Oak 12 S. 5 E. 94

Land high & broken Soil Slate
Timber B & Wht Oak.

Oct. 16th

7.54

45.27

80.00

Between Twn^l. 29 & 30 North 9.
Range 23 West 4th Mer. Min. Survey

West between Sec^t. 3 & 34
Var 11°

7.54 To Lake Met meander post.
B. Oak 8 N. 85 E. 40
Aspen 12 S. 21 W. 15

45.27 Over Lake Met meander post.
B. Oak 24 N. 25 W. 6
B. Oak 18 S. 12 W. 9

80.00 Set post at corner to Sections
3. 4. 33 & 34
B. Oak 15 N. 17 E. 90
B. Oak 15 N. 6 W. 109
B. Oak 12 S. 60 W. 91
B. Oak 20 S. 50 E. 201

Sand high rolling Oak barrens
Soil 2^d Rate.

Oct. 16th.

10.

Between Township 29 & 30 North.
Range 23 W. 4th Mer. Mon. Survey

M 7

West between Sec. 4 & 33
Var. 10° 45' E

11.44	to Pond Round	40.00
25.54	over pond	
40.00	Set post at gr Sec corner B. Oak 12 N. 2 W. 14 l Br. Oak 16 L. 46 W. 32	80.00
80.00	Set post at corner to Sections 4. 5. 32 & 33 Br Oak 12 L. 85 E. 86 No other near	

Land high Rolling Oak barrens
Soil poor 2nd rate

Oct 16th

Between Townships 29 & 30 North
Range 23 W. 4th Mer. Miw. Terry.

West between Sec. 5 & 32
Var. 10° 45'

40.00 Set post at qr Sec corner
B. Oak 18 N. 62 E. 279
B. Oak 10 — 63 N. 4 E.

80.00 Set post at corner to Sections
5. 6. 31 & 32
B. Oak 18 N. 86 E. 34
B. Oak 22 S. 84° E. 253
B. Oak 14 S. 82 W. 116

Land high rolling Oak barrens
Soil poor 2d. rate

Oct. 17th.

12. Between Townships 29 & 30 North
Range 23 West 4th Mer. Mis. Survey

M8

West between Secs. 6 & 31
Var 10° 45'

40.00 Set post at gr Sec corner
Wit Oak 24 L. 5 E. 27
Wit Oak 20 N. 60 W. 50

73.94 Set post for corner to Townships
29 & 30 N. Ranges 23 & 24 W. 80.00
Br Oak 21 N. 85 E. 32
Br Oak 15 L. 51 E. 101
B. Oak 13 N. 59 W. 39
Br. Oak 13 L. 2 W. 34

Sand high level Oak barrens
interspersed with marshes

Oct 17th

M12

Township 30 North 21

Between Ranges 23 & 24 W. 4th Mer. M.S

North between Sec. 31 & 36

Var. 10° 50'

36.67 To Lake Set witness post for Quarter Section corner

Aspen 14 L. 30 L. 26 L

57.51 Over Lake

80.00 Set post at corner of Sections 25, 30, 31 & 36

Br Oak 10 L. 88 L. 32

B. Oak 8 R. 8° L. 76

Br Oak 12 R. 42 W. 153

Land broken & high Oak barrens — Soil 2nd rate

Oct 18th

22. Township 30 North M13

Between Ranges 23 & 24 W. 4th Mer. N. Ty

	North between Sec. 25 & 30 Var 10° E	
40.00	Set post at gr Sec corner Wit Oak 15 N. 38 E. 65 Wit Oak 10 S. 73 W. 57	40.00
80.00	Set post at corner to Sections 19. 24. 25 & 30 Wit Oak 18 N. 25 E. 38 Wit Oak 16 N. 55 W. 20	80.00

Land high broken Oak barrens
Soil 2d rate.

Octr 18th

Township 30 North

Between Ranges 23 & 24 W. 4th Mer. M. T.

North between Sec. 19 & 24

Var 10° 45' E

40.00 Set post at gp Section corner

Wit- Oak 14 L. 60 W. 4 L

B. Oak 12 R. 10 L. 15 L

80.00 Set post at corner to Sections

13. 18. 19 & 24

B. Oak 18 R. 21 W. 120

Br Oak 10 R. 30 L. 39

Land high broken Oak

Openings — Soil 2d Rate

Octr 18th

24 Township 30 North M14

Between Ranges 23 & 24 W. 4th mer. M Ty

Between

North between Sec.s 13 & 18.
Var. 10° 45' E

40.00 Set post at gr Sec corner 40.00
Br Oak 14 N. 70 E. 63
Br Oak 16 West 13

64.30 ½ Rice river 70 lks 78.00

66.40 Reservation lines N. 15 W.

80.00 Set post at corner to Sec.s
7. 12. 13 & 18
Br Oak 10 N. 60 E. 110 80.00
Br Oak 12 S. 65 E. 43
Br Oak 10 S. 69 W. 44
B. Oak 20 N. 29 W. 69

Land mostly high broken
Oak barrens. Soil 3rd rate

Octr 18th

Township 30 North
Between Ranges 23 & 24 W. 4th Mer. M. Ly

North between Sec. 7 & 12
Var 10° 45' E

40.00 Set post at qr Sec corner
Br Oak 10 N. 45° E. 41
Br Oak 20 L. 69 E. 59

78.00 To Lake & set Witness corner
to Section corner
B. Oak 12 L. 25 W. 53
B. Oak 10 L. 49° E. 57

80.00 Section corner in Lake

Land high Oak barrens
Soil 3d Rate interspersed with
Lakes.

Oct. 18th.

M15

Township 30 north

Between Ranges 23 & 24 W. 4th Mer. On Ly

Betwe

North between Sec 1 & 6

Var. 10° 45'

40.00 Set post at quarter section corner

Wht Oak 16 L. 8 7 L. 8 8

Wht Oak 12 L. 65 L. 82

92.72 Intersect 3rd correction line 10 chains West of the corner to Sec. 32 & 33 of Town 31 North Range 23 West Established Corner

Br Oak 16 L. 8 W. 16 7

Br Oak 14 L. 29 L. 356

Land rolling and interspersed with marshes & lakes.

Timber Wht Blk & Br Oak.

Oct. 18th.

16.29

40.00

75.52

80.00

Township 30 north

Between Ranges 22 & 23 W. 4th Mer. M.T.

North between Sec. 31 & 36

Var 11°

16.29 B. Oak 12

40.00 Set post at cor Sec corner.

Br Oak 6 L. 86 W. 88

B. Oak 12 N. 11° E. 75

75.52 B. Oak 12

80.00 Set post at corner to Sections

25. 30. 31 & 36

B. Oak 12 N. 89 W. 148

B. Oak 6 L. 89 W. 60

Land rolling Soil 3d rate

Timber Scatg B. Oak & Br Oak

Oct 18th.

M16

Township 30 north

Between Ranges 22 & 23 W. 4th Mer. M. Ty

Between

North between Sections 25 & 30

Var 11°

36.00	Enter marsh N. W.	18.00
40.00	Set post at gr Sec corner B. Oak 18 N. 2 & W. 781	40.00
40.60	Stream 4 S E.	
46.00	Leave marsh E.	53.40
68.04	B. Oak 12	69.00
80.00	Set post at corner to Sections 19. 24, 25 & 30 B. Oak 12 L. 1 W. 56 B. Oak 15 N. 80 E. 56	80.00

Land high Rolling Soil 3rd rate

Timber Scatg B. Whs & Br Oak

Oct 18th.

Township 30 North

Between Ranges 22 & 23 W. 4th Mer. Mis. Sy

North between Sec. 19 & 24
Var 11° 10'

18.00 Br Oak 12

40.00 Set post at qr Sec corner
Br Oak 12 L. 23 L. 6 L
B. Oak 16 L. 80 W. 43

53.40 Enter Tamarac Swamp S. E.

69.00 Leave Swamp N. E.

80.00 Set post at corner to Sections
13. 18. 19 & 24
Br Oak 12 L. 6 W. 15 L
B. Oak 12 L. 11 L. 216
B. Oak 18 N. 1 W. 6 L
Br Oak 10 N. 2 W. 58 6

Land high Rolling. Soil 3rd rate
Timber Scattering Whr Blk & Br Oak

Octr 19th.

30.

Township 30 north

MIT

Between Ranges 22 & 23 W. 4th mer. M. Ty.

Between

North between Sec^s. 13 & 18

Var 11.°10'

16.87 B. Oak 12 — 18.40

40.00 Set post at gr. Sec corner
B. Oak 6 L. 2 W. 26

79.12 To a Lake & Set meander corner — 24.43
Birch 12 L. 30 W. 32
B. Oak 12. L. 30 C. 30

80.00 Section corner in Lake — 55.75

80.00

Land high Rolling — Soil 2^d rate
Scattering Whr B & Br Oak

Octr 19th

Township 30 north
Between Ranges 22 & 23 W. 4th Mer. M. Ty

North between Sec. 7 & 12
Var 11° 15'

18.40 Over Lake & set meander post.
B.Ik Oak 18 L. 40 E. 26
W. Oak 10 N. 40 W. 22

24.43 To same Lake & set post
B. Oak 10 L. 40 W. 8
B. Oak 10 N. 80 E. 30

55.75 Over Lake & set post
B. Oak 30 N. 40 W. 22

80.00 Set post at corner to Sections
1. 6. 7 & 12
B. Oak 8 L. 10 E. 16
B. Oak 18 N. 16 E. 50
B. Oak 10 L. 25 W. 45
B. Oak 8 L. 25 W. 9

Said line wet & swampy. Timber
Scrubg Black & Wht Oak.

Octr 19th

32. Township 30 North M18

Between Ranges 22 & 23 W. 4th. Mer. Main Sy

North between Secs. 1 & 6

Var. 11° 15'

5.72 To Lake

18.00 over Lake

40.00 Set post at corner to 1/4 Section

W. Oak 6 S. 87 E. 53

B. Oak 6 N. 5 W. 50

54.32 To Lake

81.50 Over Lake

86.50 To third Correction line

19 chains 50 lks East of 1/4 sec

corner on South side Section

32 T. 31 N. R 22 W. & set

post for corner to Twn. 30 N.

Range 22 & 23 W.

Aspen 8 L. 1° E. 30 4

Aspen 8 L. 1° W. 330

Octr 19th

M57

S. James
solemnly
Contract w
the United
date the 3
conformity
and the
I have reg
foregoing
Fourth Ju
and I do
the foreg
Notes of

I James M. Marsh Deputy Surveyor do solemnly affirm that in pursuance of a Contract with Geo. W. Jones Surveyor General of the United States for Wisconsin & Iowa, bearing date the 22d day of May 1847 & in strict conformity to the laws of the United States and the instructions of the said Surveyor General, I have regularly surveyed & established the foregoing township boundaries West of the Fourth principal Meridian Wisconsin Territory, and I do further solemnly affirm that the foregoing are the true original field Notes of the said survey executed as aforesaid

James M. Marsh

Deputy Surveyor.

John Allen
Mahlon Black } Chainmen

Michael + Peltier } Markers
his mark

Witness Wm R. Anderson.

M58

Subscribed by said James M. Marsh Deputy Surveyor and sworn before me at Stillwater St. Croix County this 30th day of October 1847.

J. B. Covey
Judge of Probate

Surveyor Generals office
Dubuque Augt 14th 1850

I certify that the foregoing is a true copy of a part of so much of the original field books containing the surveys executed by James M. Marsh, Deputy Surveyor, under his Contract of May 22d 1847 - as contains the surveys of that portion of his District situated West of St. Croix Lake & River respectively in the Teritory of Minnesota.

C. H. Booth
Surveyor General

M58

a James
or and
levated
th day

Dorey
of Probate

urals Office
Aug.t 14th 1850
a part of
true copy of
books con-
by James M.
der his Contra
the surveys
t situated
respectively

Booth
veyor General