

CONSTRUCTION NOTES

7/10/24

"10" 24-01

Lexington Avenue

EUGENE DIETZGEN CO.

DRAWING MATERIALS, MATHEMATICAL and
SURVEYING INSTRUMENTS

Chicago New York San Francisco New Orleans Pittsburg Toronto


Distances from Center of Roadway for Cross-Sectioning
Roadway 16 feet wide. Side Slopes 1 on 1.
For Single Track Embankment.

H	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	H
0	8.0	8.1	8.2	8.3	8.4	8.5	8.6	8.7	8.8	8.9	0
1	9.0	9.1	9.2	9.3	9.4	9.5	9.6	9.7	9.8	9.9	1
2	10.0	10.1	10.2	10.3	10.4	10.5	10.6	10.7	10.8	10.9	2
3	11.0	11.1	11.2	11.3	11.4	11.5	11.6	11.7	11.8	11.9	3
4	12.0	12.1	12.2	12.3	12.4	12.5	12.6	12.7	12.8	12.9	4
5	13.0	13.1	13.2	13.3	13.4	13.5	13.6	13.7	13.8	13.9	5
6	14.0	14.1	14.2	14.3	14.4	14.5	14.6	14.7	14.8	14.9	6
7	15.0	15.1	15.2	15.3	15.4	15.5	15.6	15.7	15.8	15.9	7
8	16.0	16.1	16.2	16.3	16.4	16.5	16.6	16.7	16.8	16.9	8
9	17.0	17.1	17.2	17.3	17.4	17.5	17.6	17.7	17.8	17.9	9
10	18.0	18.1	18.2	18.3	18.4	18.5	18.6	18.7	18.8	18.9	10
11	19.0	19.1	19.2	19.3	19.4	19.5	19.6	19.7	19.8	19.9	11
12	20.0	20.1	20.2	20.3	20.4	20.5	20.6	20.7	20.8	20.9	12
13	21.0	21.1	21.2	21.3	21.4	21.5	21.6	21.7	21.8	21.9	13
14	22.0	22.1	22.2	22.3	22.4	22.5	22.6	22.7	22.8	22.9	14
15	23.0	23.1	23.2	23.3	23.4	23.5	23.6	23.7	23.8	23.9	15
16	24.0	24.1	24.2	24.3	24.4	24.5	24.6	24.7	24.8	24.9	16
17	25.0	25.1	25.2	25.3	25.4	25.5	25.6	25.7	25.8	25.9	17
18	26.0	26.1	26.2	26.3	26.4	26.5	26.6	26.7	26.8	26.9	18
19	27.0	27.1	27.2	27.3	27.4	27.5	27.6	27.7	27.8	27.9	19
20	28.0	28.1	28.2	28.3	28.4	28.5	28.6	28.7	28.8	28.9	20
21	29.0	29.1	29.2	29.3	29.4	29.5	29.6	29.7	29.8	29.9	21
22	30.0	30.1	30.2	30.3	30.4	30.5	30.6	30.7	30.8	30.9	22
23	31.0	31.1	31.2	31.3	31.4	31.5	31.6	31.7	31.8	31.9	23
24	32.0	32.1	32.2	32.3	32.4	32.5	32.6	32.7	32.8	32.9	24
25	33.0	33.1	33.2	33.3	33.4	33.5	33.6	33.7	33.8	33.9	25
26	34.0	34.1	34.2	34.3	34.4	34.5	34.6	34.7	34.8	34.9	26
27	35.0	35.1	35.2	35.3	35.4	35.5	35.6	35.7	35.8	35.9	27
28	36.0	36.1	36.2	36.3	36.4	36.5	36.6	36.7	36.8	36.9	28
29	37.0	37.1	37.2	37.3	37.4	37.5	37.6	37.7	37.8	37.9	29
30	38.0	38.1	38.2	38.3	38.4	38.5	38.6	38.7	38.8	38.9	30
31	39.0	39.1	39.2	39.3	39.4	39.5	39.6	39.7	39.8	39.9	31
32	40.0	40.1	40.2	40.3	40.4	40.5	40.6	40.7	40.8	40.9	32
33	41.0	41.1	41.2	41.3	41.4	41.5	41.6	41.7	41.8	41.9	33
34	42.0	42.1	42.2	42.3	42.4	42.5	42.6	42.7	42.8	42.9	34
35	43.0	43.1	43.2	43.3	43.4	43.5	43.6	43.7	43.8	43.9	35
36	44.0	44.1	44.2	44.3	44.4	44.5	44.6	44.7	44.8	44.9	36
37	45.0	45.1	45.2	45.3	45.4	45.5	45.6	45.7	45.8	45.9	37
38	46.0	46.1	46.2	46.3	46.4	46.5	46.6	46.7	46.8	46.9	38
39	47.0	47.1	47.2	47.3	47.4	47.5	47.6	47.7	47.8	47.9	39
40	48.0	48.1	48.2	48.3	48.4	48.5	48.6	48.7	48.8	48.9	40

Example—If point is 22.6 ft. above grade, how far should it be from center line to be a slope stake point? Ans. from Table 30.6. For same slopes but other widths of roadbed, correct above figures by one-half difference in width of roadbed; thus in example above, for 20 ft. roadbed distance will be $30.6 + (20 - 16) \div 2$ or 2 ft. added to $30.6 = 32.6$. For slopes of 1 on 1½ see inside of back cover.


Copyright, 1914, by Eugene Dietzgen Co.


535
8
527
729

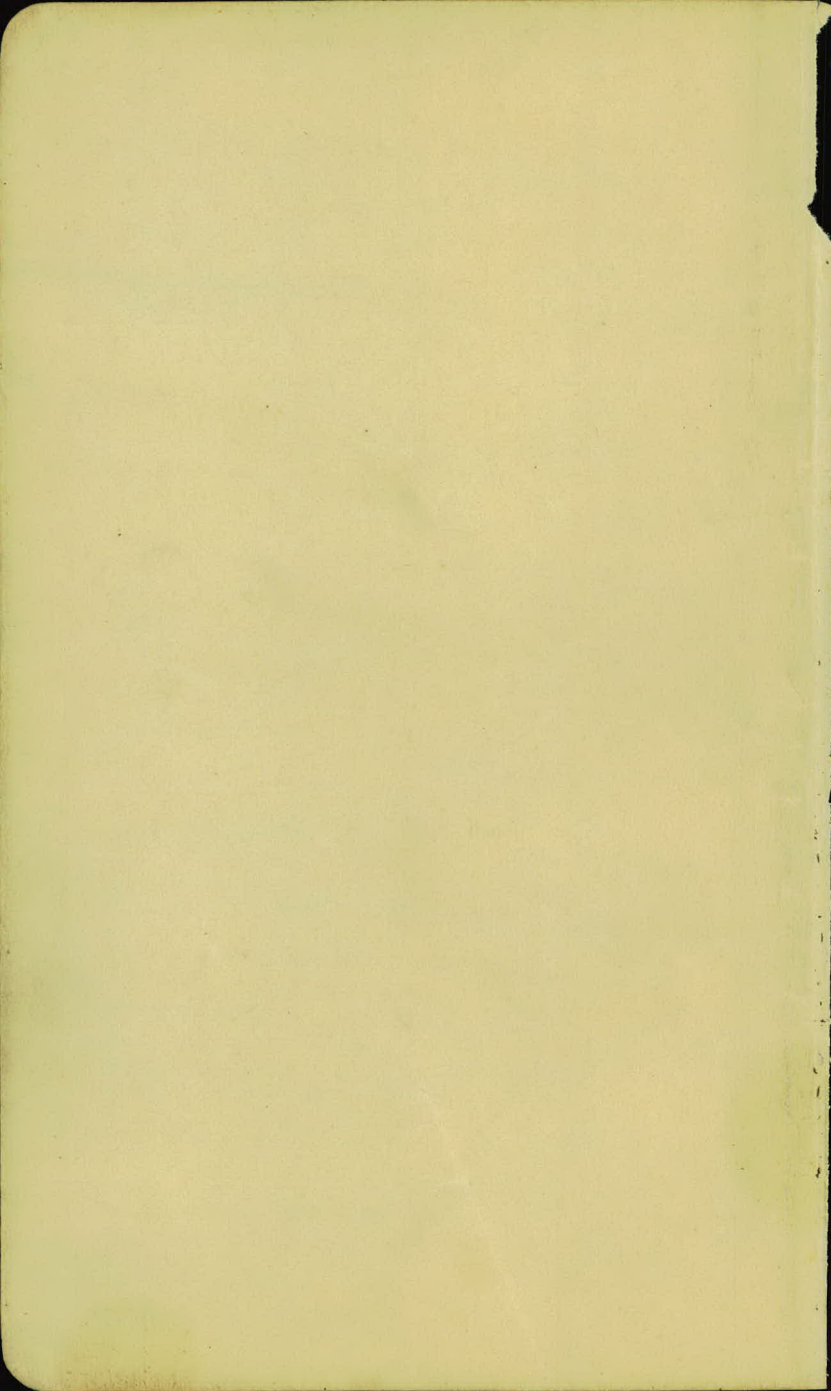

Proj. # 24-01

Sta. to Sta.				Page	to Page
0+00	52+47	Original	X Sections	37	43
52+46	78+94	"	" "	31	35
79+00	104+25	"	" "	25	29
105+00	124+00	"	" "	20	23
125+00	134+30	"	" "	17	18
135+00	164+50	"	" "	10	15
165+00	215+71	"	" "	3	8
5700	215+71	Check Levels		67	69
6100	215+71	Alignment		73	78
102+48		Location borrow pit North of N.P.R.		63	
102+48		O. X. Sec. " " " " " "		44	
		B.M. Reset		79	
		Location of Borrow Pit McCombs Lake		59	
		O. X. Sec. " " " " " "		60	61
63700	64+17	O. X. Sec. of Borrow Pit in Pt.		58	

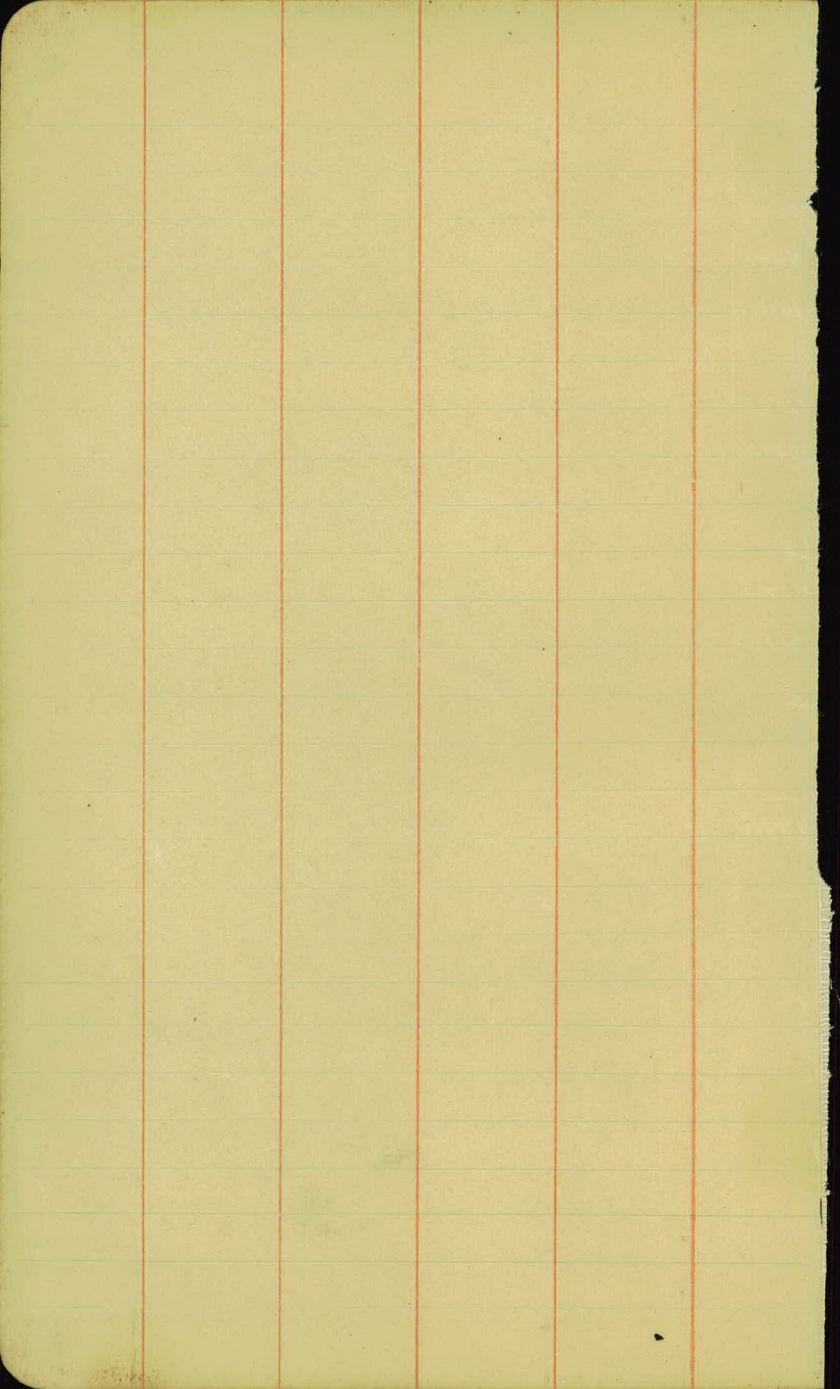

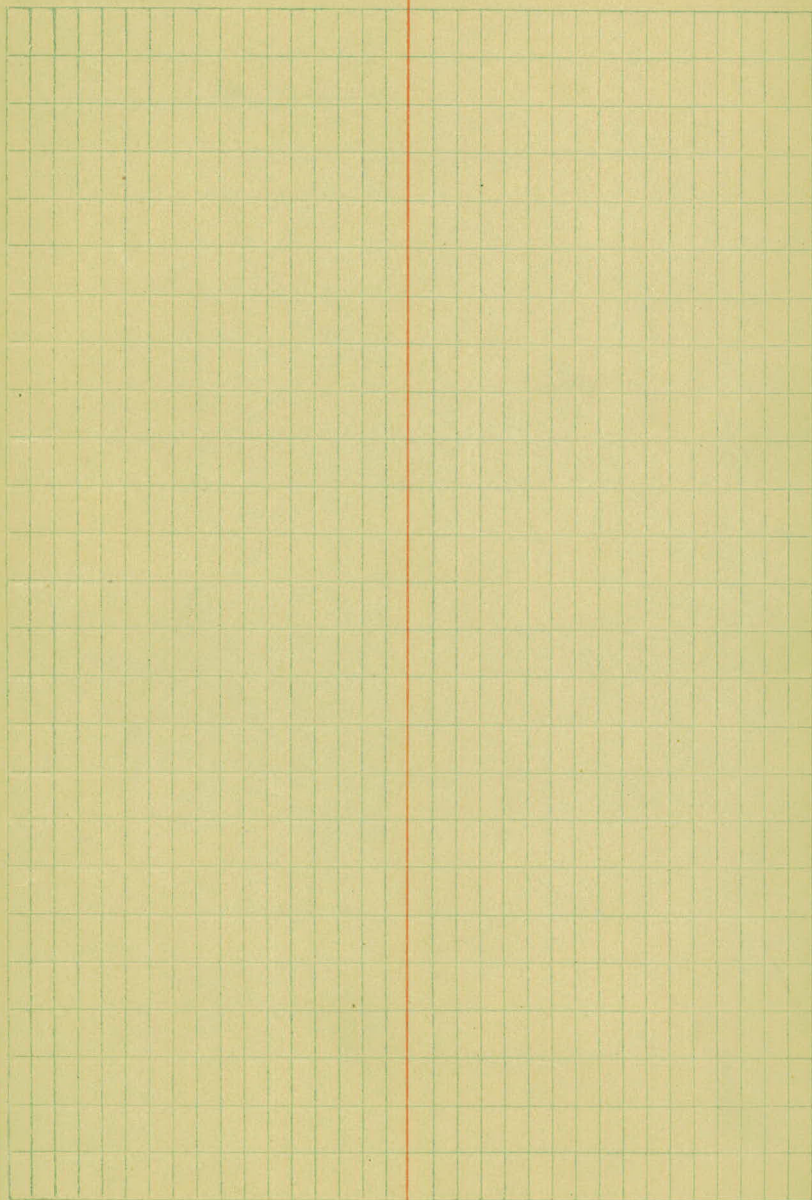

Original X Sec. from Sta. 105+00 to Sta. 215+71.

Sta.	+	H.I.	-	Elev	Plan Elev
B.M.	3.70	290.91 ✓		287.21 ✓	
145			5.3	85.6	576 285.3
144			5.1	85.8	574 285.5
147			4.5	86.4	46 286.15
148			2.8	88.1	2.8 285.1
T.P.	9.96	300.35 ✓	0.52	290.39 ✓	
+35			11.6	88.8	11.2 288.7
149			9.6	90.8	9.9 290.5
+85			7.5	92.9	2.5 292.4
170			7.2	93.2	2.3 292.7
171			4.6	95.8	5.7 295.3
172			2.1	98.3	2.7 297.7
+34			1.3	99.1	2.0 298.4
+56			0.9	99.5	1.5 298.9
T.P.	10.74	310.71 ✓	1.40	299.95 ✓	
173			10.1	300.6	10.7 300.11
+50			9.1	311.6	9.8 300.9
174			8.7	321.0	9.3 301.32

B. Rod
Q.C.B.F.

5.6	P.C. 15	91	90	41	57	51	5.5	54	C.O.1 25.6
C.O.3	25.0	33	30	25	9	17	2.2	33	

5.4	F.O.2	93	91	58	50	47	5.7	10.1	10.1	F.O.4 18.6
C.O.3	18.2	33	31	25	9	8	18	27	31	

4.6		85	91	85	48	50	4.9	10.6	10.9	F.O.6 18.9
C.O.1		18	33	30	24	8	20	30	33	

2.8	F.O.5	91	91	58	5.2	2.8	2.7	8.0	4.6	5.0	F.O.11 18.1
C.O.	18.7	33	29	24	11	9	21	26	33		

9.9		12.9	12.4	12.2	12.2	12.4	11.8	11.7	11.7	12.0	12.3	12.1	C.O.8 26.3				
C.O.3	C.O.6 26.1	7	25	92	10.8	10.5	10.0	9.9	2.8	9.5	10.9	10.5		9.7	9.4	9.0	9.0

7.5		5.5	6.1	7.5	7.4	8.1	8.1	6.9	6.2	1.7	1.7	C.O.14 26.9				
C.O.3	C.O.1 27.6	32	34	44	52	41	7.1	7.5	7.1	7.9	7.5		6.9	5.9	4.5	3.0

5.1	C.O.5	32	32	4.5	4.9	5.0	4.9	4.9	4.9	5.5	5.5	4.5	4.5	2.9	3.0	C.O.9 26.7
C.O.5	26.9	33	31	33	19	17	15	11	9	15	19	19	20	31	32	

2.7	C.O.7	14	13	1.9	2.1	3.1	2.0	2.7	2.1	2.0	2.1	2.0	C.O.5 26.5
C.O.9	26.2	33	27	27	10	7	15	13	9	15	19	33	

1.5	C.O.1	30	1.9	1.1	1.5	1.1	0.6	1.5	3.3	C.O.1 25.4
C.O.6	25.4	33	26	15	9	8	23	24	31	

10.7	C.O.17	130	12.4	11.3	10.4	10.3	10.2	11.5	11.7	D.C.14 27.7
C.O.9	25.7	33	27	20	10	5	21	24	33	

9.3	C.O.8	81	88	70	8.9	9.9	9.1	9.0	8.9	9.1	9.6	9.2	8.5	8.0	8.1	8.1	8.0	C.O.9 27.6
C.O.6	25.3	33	33	29	21	17	19	16	11	19	30	32	33	32	33	33	33	

Sta.	+	H.I.	-	Flex.	Grade
		310.71 ✓			
+50			8.5	02.2	9.0 301.7
+75			8.4	02.3	8.9 301.8
175			8.3	02.4	8.8 301.9
+45			8.2	02.5	8.7 302.0
T.P.	5.48	300.24 ✓	7.93	302.78 ✓	
176			5.9	02.9	6.0 302.3
177			5.1	03.2	5.6 302.7
+39			4.9	03.4	5.4 302.9
+50			4.9	03.4	5.4 302.88
178			4.1	03.5	5.4 302.9
T.P.	3.70	307.84 ✓	4.10	304.14 ✓	309.14
+50			4.4	03.5	5.0 302.86
179			4.7	03.2	5.2 302.7
180			5.7	02.2	5.8 302.1
181			6.4	01.5	6.8 301.8
182			7.3	00.6	8.0 299.9

G. Row

R.S.B.F.

7.0

C.05

0 0.2
257

0 0.2
323

89

80	76	83	86	92	95	87	87	84	81	85	80	75	74	70	70	70
83	80	87	80	79	77	75	7	8	15	14	18	20	20	26	33	33

88

8.8

C.05

80	80	82	80	86	92	95	88	87	85	78	85	88	78	67	14	14	C.74
83	80	87	80	79	71	77	74	7	8	15	16	18	20	25	32	38	32.9

8.7

6.0

C.04

5.6

C.05

120	105	103	91	86	81	80	79	77	76	70	52	53
39	39	23	19	12	8	15	16	17	20	26	32	33
		122	62	59	50	57	51	59	49			
		38	52	42	7	17	19	22	33			
		134	62	51	50	57	65	83				
		38	31	17	9	18	20	26	33			
		20	54	61	58	51	51	48	62	50	45	
		38	34	30	15	8	9	18	22	24	33	

5.4

5.4

C.06

0.22	57	50	53	45	52	49	47	51	41	2.9	C.0.9
135	33	16	15	12	7	16	19	21	27	33	26.4

5.0

5.0

C.06

0.20	52	51	47	44	40	40	57	52	52	53	D.C. 13
325	33	20	11	10	19	23	24	31	33		27.8

5.2

5.2

C.05

D.C. 1.7	53	47	47	51	51	50	61	62	56	53	D.C. 1.0
25.2	30	17	9	9	20	23	26	27	33		24.5

5.8

5.8

C.01

0.04	48	47	47	6.9	61	58	5.8	46	66	57	63	60	D.C. 1.5
24.9	34	24	18	14	9	11	17	19	20	23	25	38	25.0

6.8

6.8

C.04

0.31	45	54	37	27	7.2	7.5	6.4	6.9	6.9	46	14	14	C.5.8
28.6	33	24	19	17	10	10	8	10	10	18	20	33	51.3

8.0

8.0

C.07

0.07	21	21	23	65	28	28	32	27	26	26	21	15	01	C.7.3	
16.2	33	31	27	26	23	18	17	11	8	14	15	18	27	33	32.8

Sta	+	H.I.	-	Key	Grade
765		302.86 ✓	8.0	99.9 ⁸³	99.4
183		301.15 ✓	8.5	99.4 ⁹²	298.7
T.P.	1.79	306.26	8.50	299.36 ✓	
767			2.1	99.1 ³¹	298.1
184			4.0	97.2 ³¹	297.5
185			7.2	94.0 ²¹	294.1
762			9.2	92.0 ⁹⁵	291.7
T.P.	5.13	298.41 ✓	9.27	291.22 ✓	
186			3.4	90.8 ³¹	290.7
764			5.4	88.8 ⁶¹	288.3
187			6.8	87.6 ¹¹	287.3
188			10.6	83.8 ¹⁰⁵	283.9
T.P.	2.57	284.05 ✓	10.93	280.48 ✓	
719			3.0	83.1 ²⁹	283.2
189			5.5	80.6 ⁵⁶	280.5
P.M.	3.74	284.11 ✓	5.70	280.35 ✓	280.35
190			5.2	78.9 ⁵⁴	276.7
191			5.1	78.3 ⁶³	277.2
192			5.3	78.8 ⁵⁹	277.2
193			4.1	80.0 ⁴¹	277.4
194			3.3	80.8 ³⁵	278.4

11

8.5

9.1

		10.5	10.4	7.9	7.7	7.9	7.1	7.5	8.3	5.5	7.2	7.0	4.9	4.1
		33	25	25	21	19	17	11	9	17	18	21	27	33
9.2	10.27	13	10.5	7.7	10.3	10.2	10.8	10.9	9.2	8.6	8.7	9.5	8.5	4.5
30.7	25.1	33	27	26	24	22	20	18	12	7	17	18	20	27

0.29
30.4

7.1	6.7	4.9	3.9	2.5	2.5	2.5	3.2	3.7	0.0	1.07
33	32	26	20	14	9	17	18	20	34	33

F. 2.3	11.7	11.5	6.1	4.7	3.4	5.0	5.7	6.0	F. 0.6
21.4	32	30	25	10	8	23	25	33	17.2

3.8
F. 0.2
7.2
0.1

1.50	0.22	7.5	7.8	8.3	12.5
33	32	17	9	23	33

15.3	14.1	10.0	9.8	2.6	9.9	14.2
33	30	32	9	8	21	27

Print

3.7
C. 6.1

D. 0.62	5.3	4.7	4.2	3.2	4.0	4.4	6.5
25.7	33	29	31	12	9	17	23

Print

1.2	1.2	0.5	0.6	0.9	0.7	0.2	0.1	0.6	0.6	0.9	0.9	3.7	2.3	3.2
33	30	37	35	19	17	16	11	9	14	17	19	25	28	33

7.1	C. 3.9	3.9	2.8	2.8	0.2	0.2	0.8	1.0	1.0	7.4	7.8	7.8	0.6	1.0	C. 6.0
C. 0.3	27.4	23	29	24	19	18	17	11	6	9	15	17	19	25	33
10.5		13.7	12.9	12.7	13.2	11.0	11.1	10.7	11.0	11.9	11.9	7.2	6.2	C. 4.1	
F. 0.1		33	30	33	30	18	9	9	13	18	20	24	33	27.0	

6.9	6.9	5.2	5.2	3.5	3.1	3.7	4.5	4.0	1.7	0.4
33	29	24	17	9	8	16	18	20	33	33

5.6	11.0	11.0	10.2	9.3	6.7	4.0	3.8	5.7	4.7	6.7	5.0	3.5	0.1.9
C. 0.1	33	29	27	20	9	9	15	17	19	21	33	33	27.1

5.4 in 14" Oak Stump 25.54 11.57 11.77 13.71. See page 79.

5.4	F. 4.9	10.2	10.5	6.1	5.7	5.3	5.4	5.6	9.2	2.2	F. 3.2
C. 0.2	25.3	33	24	17	10	6	15	17	25	33	23.4

6.3	F. 4.2	10.7	10.4	10.4	6.6	6.2	5.9	6.2	11.1	11.3	F. 4.7
C. 0.5	24.2	33	27	23	14	10	7	14	25	33	25.0

5.9	F. 1.7	2.2	2.6	5.8	5.7	5.3	5.3	7.0	7.1	F. 0.9
C. 0.4	20.5	30	20	15	7	7	13	20	33	19.3

4.7	F. 6.4	11.1	11.4	10.4	8.9	4.6	4.3	4.6	10.4	10.7	F. 5.9
C. 0.4	27.0	33	29	22	13	8	7	15	20	33	26.3

3.5	F. 8.0	11.4	11.0	7.0	3.7	3.5	3.5	2.7	2.7	F. 5.4
C. 0.2	30.0	33	24	14	8	7	12	25	3.3	26.1

Sta.	+	H.I.	-	Elev.	Grade
		284.11 ✓			
+63			2.3	81.8	281.3
T.P.	11.04	293.24 ✓	1.91	282.10 ✓	
195			10.9	82.3	281.8
194			9.4	83.6	283.0
T.P.	7.70	294.50 ✓	6.44	286.80 ✓	
+54			12.2	84.3	283.7
+60			12.2	84.3	283.8
+69			12.1	84.4	283.8
777			12.1	84.4	283.9
197			11.2	84.7	284.2
+57			11.2	85.3	284.9
198			10.4	85.9	285.4
+14			10.5	86.0	285.6
+18			10.4	86.1	285.7
+52			9.9	86.6	286.0
T.P.	3.00	289.78 ✓	9.72	289.78 ✓	
199			2.8	87.0	286.5
200			2.4	87.4	287.8
201			1.2	88.6	288.5
+40			0.9	89.4	289.0
T.P.	10.14	299.94 ✓	0.11	289.60 ✓	
+80			9.9	90.4	289.7
202			9.0	90.8	290.2

Sta	+	H.I.	-	Elev.	Grade
		279.76 ✓			
203			7.4	92.4	7.9 291.9
204			6.2	93.6	6.8 293.0
+63			5.2	94.6	6.3 293.5
B.M.			6.60	293.14	293.18
T.P.	7.82	302.32 ✓	4.84	194.90 ✓	
205			4.4	94.9	8.5 293.2
206			7.2	95.1	7.7 294.6
207			6.4	95.9	6.4 295.9
208			3.8	98.5	4.3 298.6
+50			2.6	99.7	3.0 299.3
T.P.	9.93	307.83 ✓	2.42	299.70 ✓	
209			8.1	01.0	9.2 300.6
+51			7.2	02.6	7.8 302.0
210			5.9	03.9	6.6 303.2
T.P.	5.41	312.27 ✓	2.97	306.86 ✓	

Sta.	T	H.I.	-	Flev	Grade
		312.27 ✓			
211			5.4	06.7	6.5 305.8
212			4.2	08.1	4.6 307.7
	+50		4.0	08.3	4.2 308.1
213			4.2	08.1	4.2 307.1
	+59		4.3	08.0	4.8 307.5
214			4.5	07.8	5.3 307.0
215			5.7	06.6	7.0 305.0
	+42		4.9	05.4	7.6 304.7
	+54		7.2	05.1	7.8 304.5
	+71.4		7.5	04.8	8.0 304.3
B.M.			6.17	306.10	316.28

H. 19.

6.5	0.27	37	46	54	71	70	3.5	60	6.1	6.5	6.3	3.3	1.7	0.49
0.09	22.2	39	37	19	17	14	13	9	15	17	18	22	33	30.4

46

4.6	0.16	5.0	5.4	6.4	6.4	5.7	5.0	4.9	5.3	5.3	3.9	3.3	0.10
0.04	23.1	33	24	21	19	14	8	14	17	19	21	32	26.5

4.2	F. 2.1
0.02	21.4

42

4.2	F. 2.1	6.3	5.8	6.3	5.9	5.9	4.6	5.3	5.1	3.0	2.1	0.15
0.0	21.2	32	35	31	18	13	14	16	30	22	33	27.0

48

3.5	3.5	5.9	5.9	5.4	5.0	4.7	5.8	5.9	5.5	5.8	6.3
33	44	21	19	18	12	14	14	31	22	28	30

53

5.3	0.07	4.8	3.2	4.7	4.7	5.7	5.1	4.0	6.8	3.5	4.9	0.18
0.01	26.7	38	23	20	18	15	15	18	31	33	33	27.3

7.0

7.0	0.22	1.5	5.1	3.7	3.7	6.7	6.2	4.7	6.0	4.2	3.6	0.08
0.13	27.7	33	23	20	18	10	14	20	30	31	31	26.5

7.6

4.7	6.2	8.7	8.1	7.0	8.1	5.1
33	34	22	15	25	28	33


7.8

8.5	7.8	7.5	8.2	7.8	9.0	9.7
34	40	26	31	27	29	39

8.0

8.2	7.1
35	35

SpA 14 18' Bolt 45' RH. Sta. 214 + 00.

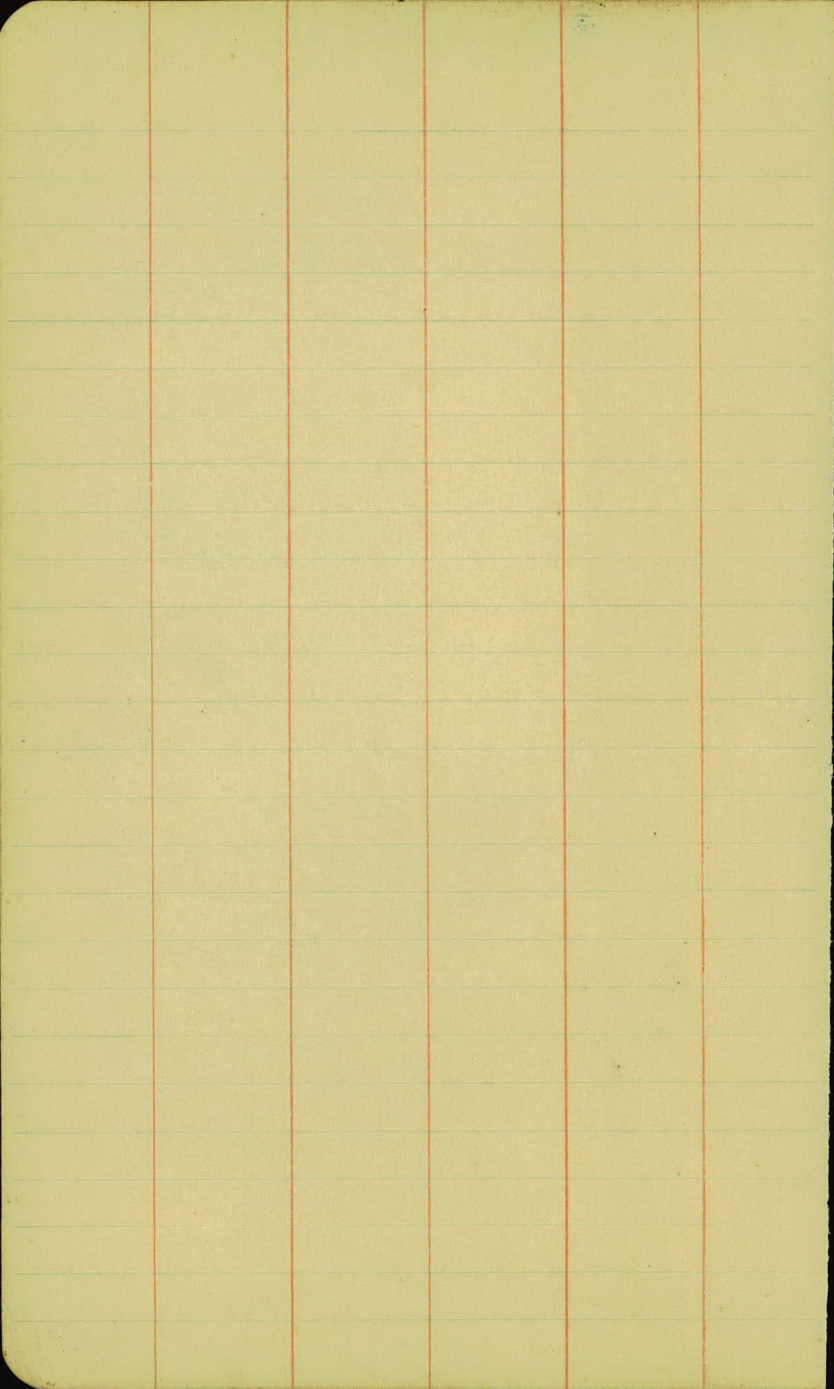

The image shows a page from a notebook with a grid of 20 columns and 30 rows. A vertical red line runs down the center, separating the grid into two equal halves of 10 columns each. The paper is aged and yellowed. There are some small dark spots and a faint red mark on the left side of the grid.

Original X Sec. from Sta. 135+00 to Sta. 140+50

Sta	+	H.I.	-	Elev.	Grade
B.M.	0.98	259.62 ✓		258.64 ✓	
T.P.	3.37	256.24 ✓	11.17	248.85 ✓	
B.M.			2.12	249.77	
135			4.5	46.3	1/8 247.0
+11			4.6	47.2	1/8 247.0
134			4.5	47.5	1/8 247.0
T.P.	4.79	252.05 ✓	4.00	247.24 ✓	
137			4.7	47.3	5/10 247.0
138			4.8	47.2	5/10 247.0
139			4.6	47.4	5/10 247.0
+28			4.5	47.5	5/10 247.0
+52			4.7	47.3	5/10 247.0
140			4.7	47.3	5/10 247.0
+25			4.7	47.3	5/10 247.0
B.M.	4.49	254.12 ✓	2.40	249.63 ✓	

A. Pool
V.R.F.

Spr. 14 Tr. 40' Lt. Sta. 128+00

Spr. 14 Tr. 40' Lt. Sta. 128+40 (50% 4/24/59)
258.99 = 272

4.8	1.65	53	37	39	50	56	56	45	40	4.8	4.7	6.8	7.0	(F. 2.2)
1.13	3.40	40	35	34	30	18	15	14	8	7	14	10	3.3	(2.2)

4.6

4.7	4.4	40	55	55	44	42	4.8	4.9	4.6	7.7
1.0	4.0	20	18	17	15	10	1	15	15	3.3

4.6

4.8	1.65	52	37	39	6.3	6.8	6.5	4.7	5.1	7.1	7.7	(F. 2.2)
1.13	3.40	40	35	34	19	15	12	8	14	19	3.3	(2.2)

4.8

5.0	1.15	54	45	39	50	6.8	6.1	4.9	5.0	5.3	5.3	7.0	8.2	(F. 2.1)
1.13	4.07	60	35	36	20	18	15	12	8	10	14	18	3.3	(2.2)

5.0

5.0	1.15	55	45	41	42	5.3	5.9	5.7	5.1	5.1	5.5	7.5	8.1	(F. 2.1)
1.13	4.07	60	40	39	24	20	18	17	15	9	10	15	19	3.3

5.0

5.0	1.15	57	45	34	56	6.2	6.1	4.7	4.8	5.1	5.1	6.9	7.9	(F. 2.0)
1.13	4.07	55	50	40	19	17	14	13	9	7	7	14	19	3.3

5.0

5.0	1.15	58	47	30	64	6.2	5.1	5.1	5.1	5.1	5.3	6.9	7.7	(F. 2.0)
1.13	4.07	55	47	34	28	28	15	13	8	7	7	13	14	3.3

5.0

5.0	1.15	57	44	3.8	5.9	6.1	5.0	5.1	5.3	5.0	6.1	7.0	(F. 2.0)
1.13	4.07	57	44	3.9	5.0	5.7	5.0	5.0	5.3	5.0	6.1	7.0	3.3

5.0

5.0	1.15	72	71	11.8	3.0	5.1	6.3	5.0	4.9	5.4	5.6	7.4	7.8	(F. 2.5)
1.13	4.07	44	40	3.0	2.9	3.0	3.7	1.9	1.4	1.0	7	14	18	3.3

5.0

5.0	1.15	3.9	4.0	6.0	6.4	5.0	5.0	5.2	5.4	7.2	7.9	(F. 2.5)
1.13	4.07	3.5	3.1	1.9	1.4	1.9	7.0	7.0	7.0	1.7	3.3	(2.2)

Spr. 14 Tr. 40' Lt. Sta. 142+00

Sta.	+	H.I.	-	Elev	Grade
141		254.12 ✓	7.4	46.5	247.0
+36			7.7	46.4	247.0
+50			7.4	46.5	247.0
+63			7.8	46.3	247.0
+87			7.7	46.4	247.0
142			7.4	46.5	247.0
+47 ⁰			7.2	46.9	247.0
143			6.7	47.4	247.0
+50			6.7	47.4	247.0
144			6.9	47.2	247.0
+50			6.9	47.2	247.0
145			6.9	47.2	247.0

Sta.	+	H.I.	-	Elev	Grade
	+	254.12 ✓			
+40			4.9	47.2	7.1 247.0
T.P.	6.72	253.87 ✓	6.97	247.15 ✓	
144			6.8	47.1	6.9 247.0
147			7.1	46.8	6.9 247.0
+88			6.8	47.1	6.9 247.0
+92			6.8	47.1	6.8 247.1
148			6.8	47.1	6.8 247.1
+04			6.7	47.2	6.8 247.1
+07			6.6	47.3	6.8 247.1
149			5.9	48.0	6.1 247.8
+50			5.5	48.6	5.5 248.4
+76 ^s			4.9	49.0	5.1 248.8
150			4.6	49.3	4.8 249.1

H
S.E. +0.10

71

KJ
S.E. -0.11

71	12.01	87	85	78	75	74	73	104	115	115	F. 23
22.2	24	33	17	13	7	9	12	17	21	33	245

69

69	10.01	83	83	75	73	72	71	110	115	118	F. 4.5
2.01	24	33	15	12	8	9	12	18	25	39	245

69

69	10.02	81	83	77	74	75	75	103	113		F. 4.2
2.02	24	33	14	12	7	11	16	20	33		245

69

78	76	77	74	72	75	73	97	101
33	22	23	12	7	13	17	25	33

68

78	76	77	74	72	75	73	77
33	22	23	13	9	13	18	33

68

68	12.10	77	76	72	71	67	68	69	76	
0.0	24.5	33	23	12	7	9	13	17	33	

68

77	78	74	72	66	67	78
33	23	12	7	9	14	33

68

78	78	72	70	67	68	97	97
33	15	11	7	12	17	22	33

67

S.E. -0.14

67	12.10	79	71	62	61	62	66	101	102	F. 4.0
0.0	24.5	33	14	12	9	11	14	22	33	24.0

S.E. +0.23

55

S.E. -0.23

55	F. 1.8	69	70	57	55	56	58	10.2	104	F. 4.5
0.0	24.5	33	17	13	10	10	15	22	33	24.5

S.E. +0.47

51

S.E. -0.47

51	56	65	65	57	62	51	51	54	55	99	10.2
0.0	33	25	22	17	15	13	10	7	12	20	33

S.E. -0.03 Ext W 0.20

48

48	12.01	52	52	53	53	49	46	50	53	99	10.2
0.0	24.5	33	17	16	14	13	8	9	13	20	33

F. 4.1
26.5

Sta.	T	H.T.	-	F100	Cray
		253.89 ✓			
+26 ^E			4.3	49.6	4.4 249.47
+76 ^E			3.9	50.0	3.7 250.17
151			3.9	50.3	3.4 250.5
T.P.	4.91	250.27 ✓	2.51	251.36 ✓	
+50			5.2	51.1	5.1 251.15
152			4.7	51.9	4.6 251.17
+23 ^{SE}			4.4	51.9	4.4 251.9
+60			4.0	52.3	4.1 252.2
B.M.	7.43	252.09 ✓	1.61	254.66 ✓	254.65
+44			9.2	52.3	9.8 252.3
153			9.2	52.9	9.6 252.5
+50			7.9	53.1	9.3 252.8
154			8.4	53.7	9.0 253.1
+49			8.0	54.1	8.6 253.5
T.P.	5.41	240.97 ✓	6.53	255.54 ✓	

H

H+

S.E. + 0.75

4.4

S.E. - 0.80

Ext. W. 1.13

4.8	12.0	10	5.2	4.5	5.3	4.3	4.8	5.1	9.9	10.0	F.48
0.01	2.5	33	18	17	14	10	8	13	23	33	26.5

S.E. + 1.12

3.7

S.E. - 1.23

Ext. W. 2.57

3.2	12.0	10	3.2	3.6	4.6	5.0	4.0	3.8	7.3	9.0	10.0	F.42
0.02	2.5	35	21	18	14	11	9	16	23	33	22.8	

S.E. + 1.12

3.4

S.E. - 1.28

Ext. W. 2.57

3.4	12.0	10	2.7	2.5	4.1	4.4	3.5	3.7	4.0	4.2	9.1	9.8	F.48
F.42	2.5	33	21	20	18	16	12	6	12	14	33	22.8	

S.E. + 1.12

5.1

S.E. - 1.28

Ext. W. 2.57

5.1	12.0	10	3.3	3.5	4.7	5.0	6.1	5.9	5.0	5.8	5.5	9.1	6.4	4.7	9.7	11.6	12.6	15.5
F.61	2.5	33	24	22	20	18	15	12	6	17	23	25	30	33	45	45	22.0	

S.E. + 0.75

4.6

S.E. - 0.90

Ext. W. 0.20

4.6	0.14	1.8	2.2	5.3	5.6	4.7	4.6	5.0	4.7	5.7	5.7	4.3	4.5	0.15
0.02	2.5	33	23	14	15	13	9	9	17	19	21	23	23	29.0

4.4

S.E. - 0.75

Ext. W. 1.27

4.4	0.14	2.1	2.2	5.0	4.4	5.2	5.2	4.4	4.5	4.7	4.7	5.4	5.4	4.3	3.9	0.14
0.0	2.5	33	22	10	17	15	14	12	8	10	14	18	20	21	23	23.0

4.1

1.4	1.2	5.0	5.0	4.2	4.1	4.4	4.5	3.5
3.9	3.1	14	14	13	8	9	17	33

In S.E. Cor of S. 1/2 W. 1/4 N. 15 1/2 Sec. 15 1/2 + 38.

5.1	3.2	10.7	10.7	9.8	9.9	10.1	10.2	9.3
3.9	2.4	13	13	13	8	9	17	33

S.E. + 0.34

9.6

S.E. - 0.30

9.6	0.70	1.4	1.5	10.3	10.2	9.3	9.5	9.4	9.0	8.4	0.11
0.4	3.3	33	24	15	13	12	7	10	23	31	26.6

S.E. - 0.14

9.3

S.E. - 0.11

9.3	0.70	0.5	0.5	9.4	9.5	7.8	9.0	9.0	8.0	0.13	
0.4	3.3	33	24	15	14	13	8	9	17	33	22.8

9.0

9.0	0.71	1.0	1.7	9.6	9.0	8.4	8.6	8.7	8.5	9.5	9.5	9.3	6.2	0.22
0.6	3.3	25	14	14	13	9	8	11	14	14	15	17	33	27.3

8.6

0.4	1.2	9.1	9.1	8.1	8.2	8.3	8.3	9.5	9.5	9.3	9.1
3.3	24	14	14	13	8	6	14	14	15	17	33

Sta.	T	H.I.	-	Elev.	Cracks
		260.99 ✓			
153			4.8	54.2	2.3 253.7
754			4.0	55.0	6.4 254.6
757			5.9	55.1	6.3 254.7
778			5.5	55.5	6.2 254.8
781			5.5	55.5	6.1 254.9
T.P.	3.45	260.97 ✓	4.05	256.92	
154			4.6	55.8	5.2 255.25
157			2.3	58.1	2.8 257.62
T.P.	11.76	267.25 ✓	4.88	255.49	
158			5.4	61.7	6.2 266.99
159			1.4	65.7	2.0 265.2
T.P.	11.44	276.70 ✓	2.01	265.24	
160			4.7	70.0	7.1 267.6
755 ²			5.0	71.7	5.8 271.1
T.P.	10.70	275.11 ✓	2.39	274.37	
161			10.2	74.3	11.6 274.0
T.P.	10.50	278.99 ✓	6.62	276.49 ✓	

L

R

7.3

7.3	0.67	0.5	1.5	8.0	8.1	6.7	7.0	7.1	7.1	8.4	8.7	5.7	7.0	0.08
0.65	3.22	3.3	2.1	1.6	1.4	1.2	8	10	12	14	16	18	3.3	0.63

6.4

3.5	2.9	7.8	7.8	6.0	6.1	6.3	6.6	8.2	7.2	6.5	6.3
3.3	2.0	7.6	7.4	7.2	7	9	13	16	17	20	3.3

6.3

3.6	3.0	4.7	4.1	6.3	6.6	8.2	7.2	6.5	6.3
3.3	2.1	3.0	7	9	13	16	18	20	3.3

6.2

5.6	5.2	5.4	5.7	5.7	6.0	8.5	8.5	9.7	7.9
3.3	2.4	1.2	5	7	17	2.1	2.3	2.0	3.3

6.1

5.5	5.2	8.0	8.0	5.6	5.8	6.8	6.0	8.5	8.5	7.7	7.9
3.3	1.2	7.6	1.5	1.3	5	7	17	2.1	2.3	2.5	3.3

5.2

5.2	F.1.9	7.8	7.5	7.7	5.4	7.7	7.9	5.0	8.2	7.3	7.0
0.68	2.0	3.3	2.1	3.0	1.8	1.5	7	8	2.1	3.7	3.3

2.8

2.8	F.1.9	15.8	15.2	3.0	2.8	2.7	2.8	12.8	13.8	14.0	F.1.3
0.65	3.7	4.0	3.1	1.5	8	9	16	3.0	3.3	4.0	3.6

6.2

6.2	F.5.4	15.0	1.8	6.3	6.2	6.0	5.9	12.0	13.0	F.6.6
0.64	3.7	3.3	2.7	1.7	7	7	15	2.3	3.3	3.7

2.0

2.0	F.1.3	13.1	12.4	2.8	2.5	2.0	2.9	13.6	13.2	13.4	F.6.6
0.64	3.7	3.0	3.4	2.1	1.1	6	1.5	3.0	3.3	4.0	3.6

7.1

7.1	F.0.9	7.0	7.4	8.7	8.5	7.1	7.4	7.0	6.6	6.3	6.9	0.08
0.65	1.8	3.3	2.5	2.4	3.2	7.6	1.1	7	1.7	2.9	3.3	0.63

S.E. - 0.14

5.5

5.5	0.10	4.9	5.3	5.5	6.1	6.3	5.6	5.1	5.2	5.0	5.8	5.8	5.0	4.1	2.2	1.6	0.89
0.65	2.7	3.0	3.1	1.8	1.7	1.5	1.4	1.0	7	1.4	1.6	1.7	1.8	2.6	3.9	3.3	2.9

S.E. - 0.24

11.8

11.8	0.09	7.5	10.4	10.6	11.4	11.1	10.8	11.1	11.0	11.1	11.0	11.0	10.4	9.7	5.2	4.0	0.67
0.63	1.6	3.3	3.0	3.0	1.7	1.6	1.3	7	9	1.3	1.4	1.6	1.4	1.4	3.4	3.3	3.3

S.E. + 0.24

Sta.	+	H.I.	-	Elev	Grade
		288.99 ✓			
+85 ²			10.8	277.8	11.2 277.8
162			10.0	277.4	10.6 278.4
+50			2.8	80.7	8.6 80.4
163			6.4	82.4	6.9 82.1
+39 ⁰⁵			5.4	83.6	5.8 83.2
T.P.	2.73	192.60 ✓	4.32	284.67 ✓	
164			7.7	84.9	8.2 84.4
+50			7.5	85.3	7.6 85.0
B.M.			4.75	287.85	287.80
B.M.			5.40	287.60	287.21

LF

RF

Exp. W. 124 S.E. -0.87 11.2 S.E. +0.79

11.2	102	52	52	9.6	125	113	119	119	110	110	114	119	108	98	39	32	0.23
0.04	295	40	34	31	17	18	16	15	9	11	13	15	16	31	29	33	32.3

Exp. W. 318 S.E. -1.00 10.6 S.E. +0.88

10.6	124	42	50	92	100	114	114	102	104	104	112	112	103	95	27	26	1.2	0.22
0.04	308	40	34	31	19	18	15	14	8	10	12	15	15	32	30	33	38	32.7

Exp. W. 372 S.E. -1.35 8.6 S.E. +1.10

8.6	124	24	33	26	85	74	94	70	91	83	79	89	89	73	64	0.8	0.0	0.07
0.03	305	41	34	29	19	17	15	14	9	10	14	15	17	20	26	33	39	32.2

Exp. W. 346 S.E. -1.35 6.9 S.E. +1.05

6.9	124	24	33	26	85	74	94	70	91	83	79	89	89	73	64	0.8	0.0	0.07
0.03	305	41	34	29	19	17	15	14	9	10	14	15	17	20	26	33	39	32.2

Exp. W. 124 S.E. -0.77 5.8 S.E. +0.74

5.8	124	18	21	44	51	67	67	59	60	55	54	62	62	15	12	0.38	0.38
0.04	295	40	32	30	18	17	15	14	8	5	12	13	15	22	33	29.5	29.5

S.E. -0.40 8.2 S.E. +0.40

8.2	124	25	32	75	77	87	87	80	80	79	77	82	85	78	46	0.23	0.23
0.05	271	38	31	27	18	17	15	14	7	4	13	14	17	21	33	28.8	28.8


S.E. -0.14 7.6 S.E. 0.10


7.6	124	25	32	75	77	87	87	80	80	79	77	82	85	78	46	0.23	0.23
0.03	261	33	29	27	17	17	15	14	7	13	14	16	20	32	35	28.1	28.1

Exp. in 12" Elm 53 Rt. Sta. 164+722 Set 4/13/20

Exp. in 12" Birch 22 Rt. Sta. 164+493

> see page 79

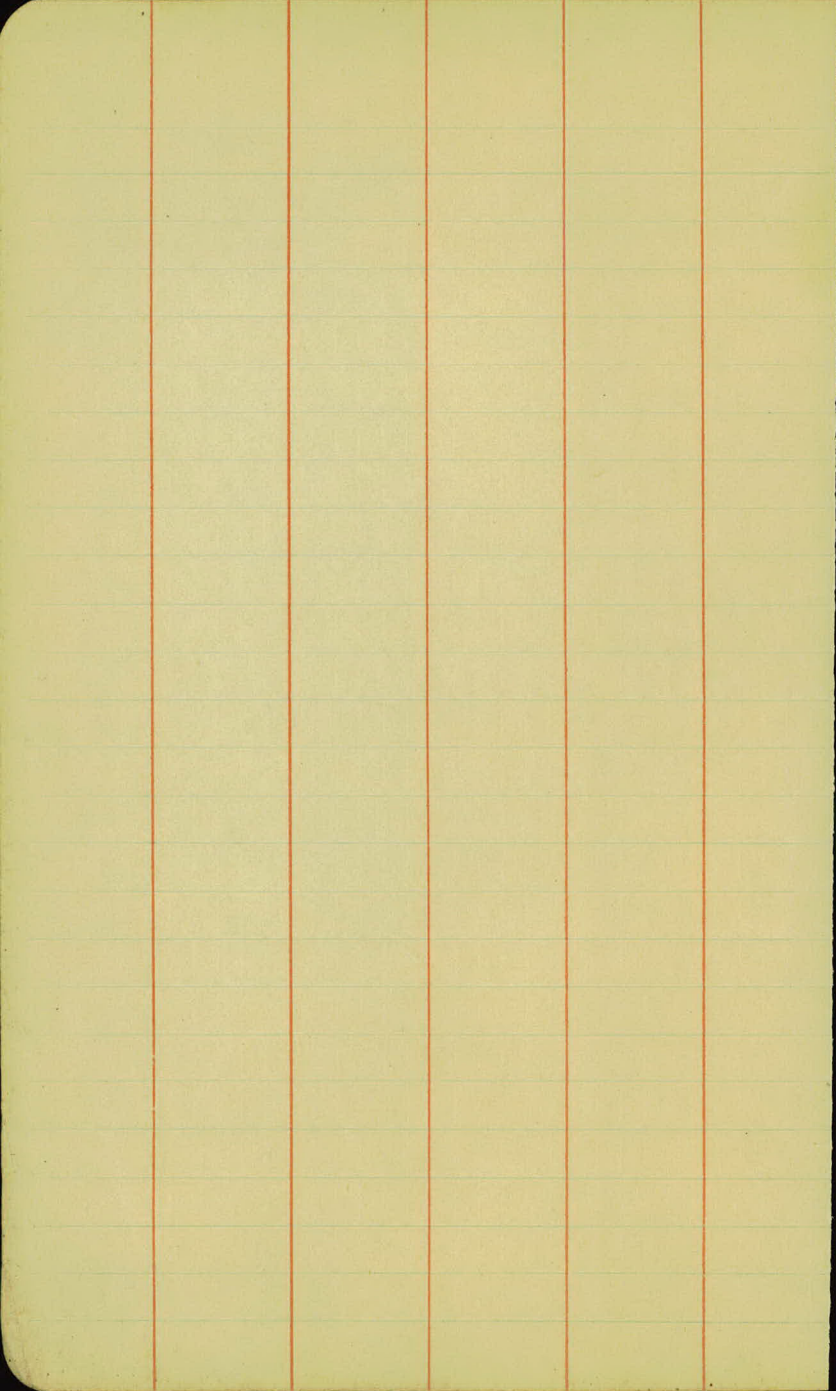

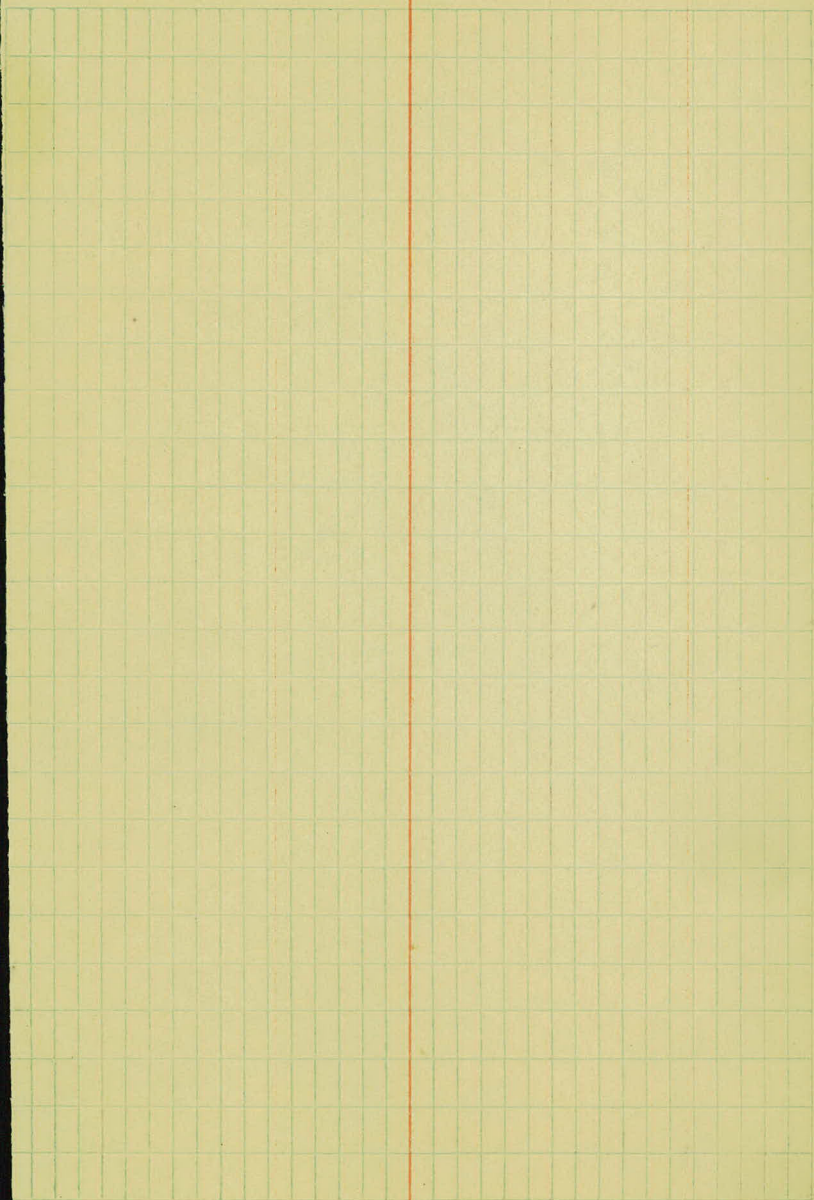

Original & Sec. from Sta 125+00 to Sta 134+50

Sta.	T	H.I.	-	Elev.	Grade
B.M.	10.29	268.93 ✓		258.64	
125			1.1	67.8 ^{1.4}	267.5
+50			2.8	66.1 ^{3.1}	265.8
126			4.2	64.7 ^{4.8}	264.1
+50 ^{5.7}			5.3	63.6 ^{5.8}	263.05
+50 ^{5.7}			6.7	62.0 ^{7.6}	261.83
127			7.8	61.1 ^{8.3}	260.63
T.P.	3.48	263.18 ✓	9.93	259.50 ✓	
+50			3.6	59.6 ^{4.3}	259.87
128			5.3	57.9 ^{6.1}	257.09
+50			7.5	55.7 ^{8.0}	256.2
T.P.	0.94	254.95 ✓	9.17	254.01 ✓	
129			1.1	54.0 ^{1.6}	253.3
+50 ^{3.6}			2.1	51.9 ^{2.5}	252.35
+50 ^{3.6}			4.1	50.9 ^{4.5}	250.43

B. Rod
D.C.R.F.

(14)

Spr. III T.P. 50	17	7.0	1.25	1.00															
F. 9.0	4.5	4.4	5.1	5.2	1.8	1.4	1.3	1.4	5.2	4.0		F. 3.0							
237	33	29	35	18	13	7	6	11	17	33		284							

S.E. - 0.14

(31)

F. 3.3	5.3	6.0	6.0	4.5	3.2	3.0	3.1	3.0	5.5	4.5		F. 1.5							
227	33	35	23	18	13	7	5	11	14	33		207							

S.E. - 0.17

(48)

F. 3.4	8.2	8.7	8.1	4.9	4.0	4.5	4.4	5.3	4.9			P.O. 1.7							
234	33	34	18	2.2	7	3	11	15	33			33.0							

S.E. - 0.27

(58)

F. 3.0	8.9	9.7	3.2	5.9	5.6	5.5	5.7	6.4	6.4	5.7	4.4								
225	33	25	17	13	7	8	14	15	17	18	33								

S.E. + 0.27

(76)

F. 3.1	8.8	8.4	8.4	7.2	6.9	7.7	7.8	6.4	4.9			P.O. 1.9							
239	33	30	18	14	8	12	15	16	12	33		33							

S.E. - 1.05

(83)

F. 3.0	8.1	8.7	8.2	5.9	5.6	5.5	5.7	6.4	6.4	5.7	4.4								
225	33	25	17	13	7	8	14	15	17	18	33								

S.E. + 0.92

(43)

C. 1.6	4.0	4.0	4.0	7.1	4.1	4.1	3.2	3.0	4.2	4.2	3.9	1.8							
330	35	30	28	18	13	7	9	19	21	23	24	30							

S.E. - 1.32

(61)

C. 1.6	4.0	4.0	4.0	7.1	4.1	4.1	3.2	3.0	4.2	4.2	3.9	1.8							
330	35	30	28	18	13	7	9	19	21	23	24	30							

S.E. + 1.12

(80)

C. 1.6	4.0	4.0	4.0	7.1	4.1	4.1	3.2	3.0	4.2	4.2	3.9	1.8							
330	35	30	28	18	13	7	9	19	21	23	24	30							

S.E. - 1.32

(43)

C. 1.6	4.0	4.0	4.0	7.1	4.1	4.1	3.2	3.0	4.2	4.2	3.9	1.8							
330	35	30	28	18	13	7	9	19	21	23	24	30							

S.E. + 1.12

(16)

D. 1.6	1.0	3.1	5.2	4.3	1.6	4.2	1.4	2.0	2.3	2.4		P.O. 0.3							
330	30	35	30	25	20	9	10	13	30	30		33							

S.E. - 0.94

(25)

F. 2.0	1.2	3.3	6.0	5.3	3.5	2.1	2.4	3.9	4.9			F. 2.5							
330	33	31	27	20	17	5	11	14	33			31.9							

S.E. - 0.47


(45)

F. 3.0	4.0	6.0	7.8	7.9	4.7	4.0	4.5	4.7	2.1	7.0		F. 3.0							
330	30	31	29	24	9	9	13	17	33			32.8							

Sta.	T	H.I.	-	Flow	Grade
		254.95			
130			5.2	49.8 ^{5.3}	247.6
+50			0.9	48.3 ^{6.5}	247.1
	9.45	251.78 ✓	2.62	247.35 ✓	
131			4.5	47.3 ^{4.9}	247.8
+35 ²²			4.8	47.0 ^{4.7}	247.8
+25 ²⁷			4.1	47.0 ^{4.8}	247.0
T.P.	2.32	252.05 ✓	2.05	247.75 ✓	
132			5.0	47.1 ^{5.0}	247.1
+35 ²⁹			4.7	47.4 ^{5.0}	247.0
133			4.9	47.2 ^{5.0}	247.0
+49 ¹³			5.0	47.1 ^{5.0}	247.0
134			4.9	47.2 ^{5.0}	247.0
+50			4.7	47.4 ^{5.0}	247.0
B.M.			2.32	249.73 ✓	249.71

	SE	SE										
5.3	SE - 0.21	5.3										
0.01	F.33	74	74	82	82	57	57	54	55	78	88	F.30
	228	27	31	30	17	18	7	10	14	17	33	228
	SE - 0.25	5.4										
0.8	F.34	94	101	90	70	70	73	11.0	11.5	12.0	14.7	F.37
0.01	231	37	17	11	7	8	13	19	26	33	252	
	S.E. + 0.24	5.5										
4.8	F.35	72	68	48	40	47	43	2.8	2.2	2.5	F.39	
0.01	353	33	15	12	7	7	12	18	26	39	353	
	S.E. + 0.37	5.6										
7.7	F.35	82	70	5.1	4.1	4.9	5.2	4.7	2.3	2.4	F.32	
1.01	232	39	15	12	7	8	13	17	24	33	228	
	S.E. + 0.74	5.7										
4.8	F.32	72	63	5.2	5.0	5.0	5.5	7.2	6.2	5.4	5.0	F.32
0.0	203	33	14	11	4	9	7	17	19	27	33	203
	S.E. + 0.57	5.8										
5.0	F.30	57	73	67	54	51	5.2	5.2	4.9	4.2	P.O. 1.8	
0.0	220	33	29	14	11	6	8	13	17	33	270	
	S.E. + 1.12	5.9										
5.0	F.32	57	68	67	54	50	4.7	4.7	5.1	5.2	7.1	P.O. 1.8
0.0	513	35	37	24	13	12	8	7	12	16	33	477
	S.E. 1.12	5.0										
5.0	P.O. 0.5	57	54	47	67	51	49	5.3	5.4	6.3	7.1	P.O. 2.2
0.01	513	33	24	21	17	12	7	8	12	15	33	27.1
	S.E. + 0.37	5.0										
5.0	F.32	67	65	72	72	55	5.2	5.3	5.4	6.7	7.1	F.30
0.0	513	33	19	7	15	12	5	8	14	16	33	221
	S.E. + 0.47	5.0										
5.0	P.O. 0.2	62	63	52	51	53	5.4	5.4	7.2	7.0	P.O. 0.0	
0.01	513	37	15	11	7	7	13	16	33		14.1	
	S.E. + 0.14	5.0										
5.0	P.O. 0.0	60	41	52	59	59	5.2	5.2	4.9	5.0	6.1	P.O. 1.0
0.0	513	33	24	20	19	16	8	10	19	35	33	14.5

Spr. W. Tree 40' H Sta. 192 + 40.

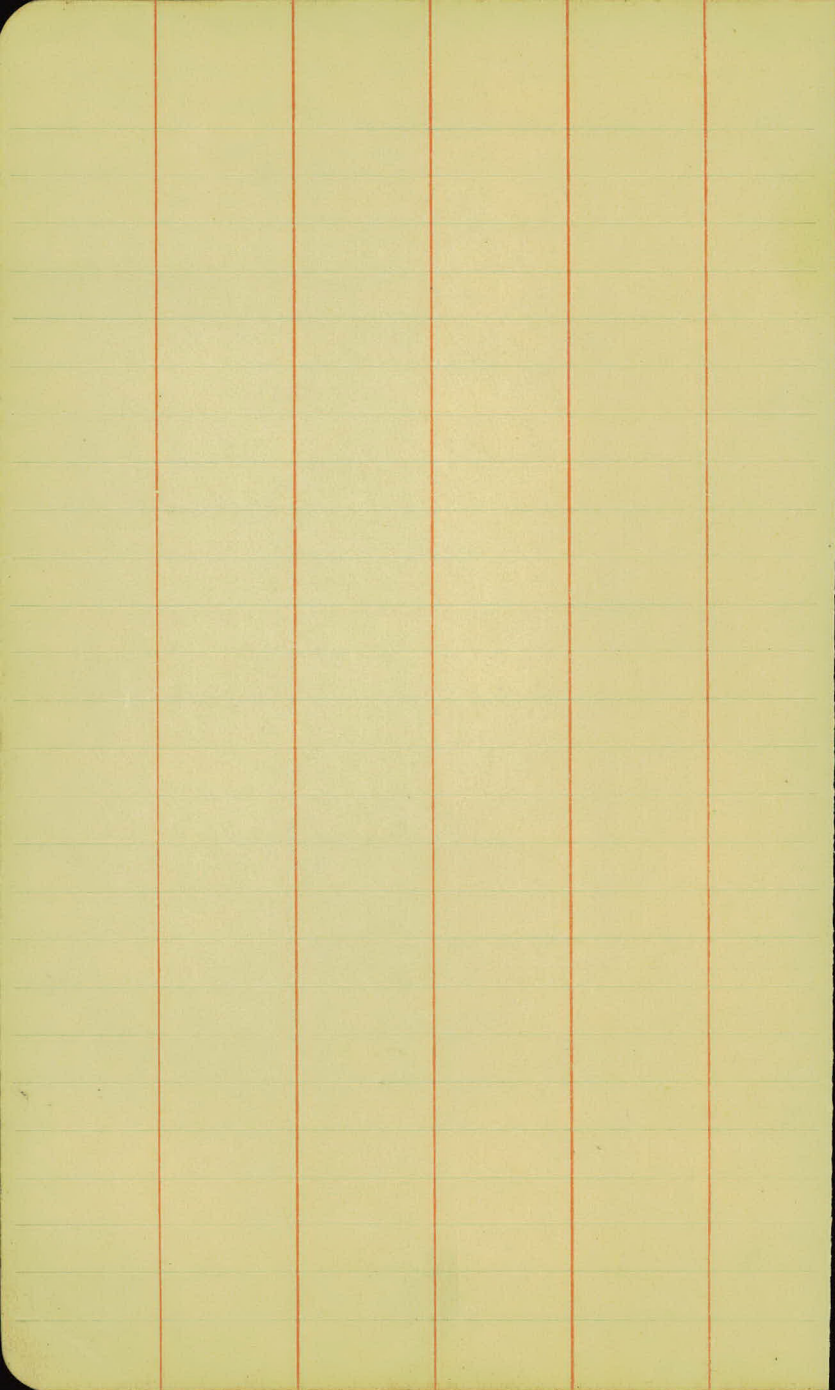

A sheet of aged, cream-colored paper with a grid of light green lines. A vertical red line runs down the center of the page, dividing it into two equal halves. The grid consists of 20 columns and 20 rows of squares. The paper shows signs of age, including slight discoloration and a few small dark spots.

Original X Sec. from Sta. 105+00 to Sta. 124+00

Sta.	+	H.I.	✓	-	Elev.	Grade
B.M.	2.10	270.98			262.98	
B.M.				2.40	268.58	✓
105				5.3	67.7	3.8 267.2
T.P.	10.42	279.98	✓	1.62	269.90	✓
	+50			7.4	70.2	10.3 269.5
106				7.3	72.6	8.0 271.8
	+57			5.5	74.3	6.5 273.3
T.P.	10.71	287.91	✓	2.98	279.00	✓
107				10.2	77.1	11.5 276.4
	+40			9.1	78.8	9.8 278.1
108				4.4	81.5	6.9 281.0
	+62			3.6	84.3	4.0 283.9
T.P.	10.77	290.57	✓	2.21	285.20	✓
109				10.7	85.9	11.0 285.9
110				6.7	89.9	6.9 288.7
	+63			4.6	92.0	4.7 291.9

G. 1904
P. B. B. F.

S.P.A. in T.P. 100 L. Sta. 104.100

S.P.A. in T.P. 100 L. Sta. 104.100 (38)

3.8	C.O.I.	36	34	41	36	33	33	5.6	9.5	4.3	9.3	5.1	20.9
C.O.S	25.0	33	19	15	13	8	7	11	13	15	14	33	32.4

(103)

22.144	10.7	11.3	10.3	12.7	9.8	10.1	10.7	10.9	10.4	10.7	
33	29	18	16	15	11	9	12	14	15	17	33

(40)

10	C.O.S	33	6.5	4.2	5.0	5.3	9.1	8.3	7.5	7.7	7.7	8.7	8.2	9.8	8.0	C.O.S	25.5
30.7	26.8	3	27	25	24	17	16	14	10	7	10	13	15	16	33		25.5

(65)

3.0	2.7	5.7	5.5	6.0	6.8	6.0	5.0	5.1	5.8	6.8	4.8	6.1	5.9
33	25	24	22	19	14	12	8	7	11	14	16	17	33

(115)

11.0	C.O.S	79	8.7	11.0	12.0	12.5	11.3	11.3	11.1	11.4	12.2	12.2	11.2	10.3	C.O.S	30.9
76.7	28.6	33	34	34	27	16	19	9	7	12	14	14	17	33		30.9

(98)

5.5	6.3	8.0	5.7	9.5	10.3	9.0	8.1	9.4	9.5	10.1	10.2	8.9	8.5
33	24	24	22	17	16	13	9	7	12	13	15	14	33

(69)

6.7	C.O.S	30	18	26	1.5	7.7	7.7	9.1	4.0	6.7	6.3	7.7	7.0	6.7	6.1	6.6	C.O.S	20.8
2.05	27.4	33	25	23	17	17	15	13	8	8	12	13	15	17	26	33		20.8

(110)

19.18	37	41	40	33	26	26	3.9	4.3	5.0	5.0	4.8	6.2
33	23	21	19	14	10	8	13	14	17	18	33	

(110)

11.0	C.O.S	78	8.6	10.1	10.9	11.4	11.6	11.1	11.4	10.3	11.1	11.7	9.4	10.4	C.O.S	31.8
30.3	32.2	33	22	21	17	17	16	14	9	7	13	14	17	33		31.8

(69)

6.7	C.O.S	48	5.3	5.6	6.0	7.3	6.7	6.8	6.9	7.8	7.5	5.3	5.0	C.O.S	29.6
2.03	37.1	33	27	26	17	15	10	8	13	15	17	19	33		29.6

(47)

5.8	6.4	6.0	5.4	4.7	4.7	5.4	5.8	5.8	5.1	5.0
33	25	18	14	9	9	14	15	17	18	33

Sta	+	H.L.	-	Elev.	Grade
		294.57 ✓			
111			3.6	93.0 3.9	292.7
112			1.4	95.2 1.9	294.05
+21			0.9	95.7 1.7	294.9
T.M.	2.58	303.30 ✓	0.85	295.72 ✓	
B.M.			5.63	297.47	297.65
+79			2.3	96.0 8.0	295.4
113			2.0	96.3 7.8	295.52
+32			6.8	96.5 7.8	295.6
114			2.1	96.2 7.9	295.4
+24			2.3	96.0 8.2	295.2
+29			2.4	95.9 8.3	295.1
+41			2.6	95.8 8.4	295.0
+45			2.5	95.8 8.3	294.9
115			8.4	94.9 9.2	294.2

14

14

(3.9)

3.9	PC 11	57	53	52	44	41	3.7	4.3	4.7	4.7	8.41
2.03	243	33	21	18	13	10	8	17	18	33	242

(1.9)

1.9	PC 10	2.3	2.0	1.9	1.7	2.0	3.0			22.14
2.05	361	73	51	16	9	14	33			249

(1.7)

1.6	1.9	1.3	2.2
33	13	16	33

(8.0)

S.P.H. in Tree 50' M. 579. 112 + 50.

44	69	78	75	72	7.9	7.8	6.7	8.0	8.2
35	27	18	8	10	17	31	21	22	33

(7.0)

7.8	0.45	34	3.0	4.5	4.8	7.1	7.5	7.5	7.3	8.4	8.4	4.5	4.3	5.8	0.13
2.68	321	33	30	25	21	18	8	10	17	17	20	23	32	33	358

(7.8)

3.7	2.0	6.2	7.0	7.9	7.5	7.1	7.0	9.0	8.1	8.1	7.7	7.5	5.2	5.6	4.9
33	30	25	17	15	13	8	7	11	14	14	18	21	23	31	30

(7.1)

7.9	61	54	7.5	7.6	7.1	8.2	8.2	7.5	7.5	7.5	7.3	9.9	7.7	7.3	5.1	4.4	0.30	
2.68	33	21	20	17	16	14	13	11	7	8	12	13	15	16	21	24	33	305

(8.2)

4.5	4.6	3.8	3.8	2.3	4.9	2.0	7.4	7.1	4.7	4.5	4.3
33	33	24	15	12	11	8	12	31	26	31	76

(8.3)

6.6	5.9	4.7	7.9	8.4	7.9	7.0	7.5	7.2	7.2	6.6
33	27	27	16	15	12	6	6	10	21	33

(8.4)

4.7	6.2	3.2	3.0	3.4	3.4	7.5	7.5	7.7	7.6	4.7
33	37	24	16	15	13	11	10	8	20	33

(8.5)

4.7	4.0	3.8	3.9	8.0	8.4	8.1	7.7	7.5	7.4	4.2	4.2
33	37	24	16	15	14	10	4	7	19	34	33

(8.2)

7.1	0.3	6.1	4.3	6.1	9.4	7.6	6.9	8.8	6.9	2.5	7.5	4.6	3.7	0.51
2.07	33	27	20	13	15	14	12	7	10	12	4	14	23	33

Sta.	T	H.I.	-	Elev	Grade
		363.30 ✓			
T.P.	2.41	301.79 ✓	8.91	294.38 ✓	
+48			7.9	93.9	8.7 293.1
+50			7.9	93.9	8.7 293.1
+60			8.2	93.5	8.9 292.9
+63			8.1	93.6	8.9 292.9
114	1		7.3	92.5	10.0 291.1
+31			10.3	91.5	10.9 290.9
T.P.	0.98	292.39 ✓	10.20	291.59 ✓	
117			2.8	89.6	3.4 289.0
+50			4.4	88.0	4.8 287.6
T.P.	1.91	289.26 ✓	5.02	287.35 ✓	
118			2.6	86.7	3.1 286.20
119			5.3	84.0	5.8 283.50
T.P.	2.93	284.66 ✓	7.53	281.73 ✓	
+50			1.7	82.8	2.4 282.3
120			3.0	81.7	3.7 281.00

87

61	68	84	85	91	86	63	81	82	88	98	19	11
33	37	26	16	25	12	8	8	12	14	15	24	33

87

70	67	83	84	85	86	84	82	82	87	87	88	92	42
63	38	37	17	15	18	8	7	12	15	16	17	22	33

89

24	23	26	27	25	28	25	25	28	29	29	61
39	38	34	17	14	12	4	8	12	14	17	33

89

74	23	26	26	24	28	26				55	86	43	23	18
33	29	27	17	15	12	6				7	11	15	24	33

10.0

10	80	87	92	100	101	105	101	27	27	27	103	103	44	42	44	8.56
67	27	13	30	27	17	14	13	6	4	11	14	18	23	33	35	33.1

10.9

135	127	118	114	108	105	105	105	108	105	106	107	93	66
33	28	23	15	12	7	4	10	35	17	17	20	33	

34

4	130	115	108	43	46	33	32	30	31	42	49	45	35	28	50.22	273
66	22	34	32	19	15	12	7	7	13	18	20	35	28	38		

48

117	64	50	47	48	49	61	49	48
30	17	13	5	8	12	17	23	33

31

105	123	25	53	54	32	27	27	37	47	47	133
	27	33	24	17	10	4	8	14	22	33	23.7

58

135	86	74	58	56	56	58	115	122	131	129
33	33	19	12	6	8	12	21	33	27.1	

24

18	14	41	47	48	25	22	22	23	28	100
33	33	34	21	14	14	4	4	11	32	33

37

17	135	27	54	48	35	37	32	34	86	96	154	261
67	22	33	33	14	12	7	6	10	20	33		

Sta.	+ -	H.I. 284.64 ✓	-	Elev	Grade
+40			4.0	80.7	4.7 280.0
121			5.2	79.1	6.1 278.6
+23			6.2	78.5	6.7 278.0
122			7.7	76.8	8.5 276.20 276.2
+22			8.4	76.3	9.0 275.7
+24			8.5	76.2	9.1 275.6
123			10.5	74.2	10.9 273.74
T.P.	1.18	275.29 ✓	10.55	274.11	
+78			3.9	71.9	3.9 271.4
124			4.0	71.3	4.0 270.84
T.P.	1.25	267.31 ✓	9.23	266.04 ✓	
B.M.			8.45	258.66 ✓	258.6

22

112

(47)

33	63	40	46	45	42	44	21	86
35	31	16	13	7	7	13	17	30

(61)

21	F.20	63	79	82	63	66	50	53	12.3	15.2	F.69
205	214	33	27	17	14	8	6	11	22	33	223

(67)

51	53	84	77	66	65	64	64	12.7	13.7
33	32	27	17	13	8	4	11	22	33

(85)

25	F.26	12	77	94	94	82	82	81	91	100	F.12
244	251	35	20	14	13	7	8	10	15	38	227

(90)

25	91	103	81	81	87	88	95	98
34	26	26	13	8	6	12	18	30

(91)

22	103	58	87	87	89	29	67	63	94
34	21	12	6	6	11	17	22	27	30

(119)

20	127	57	62	131	131	42	111	108	107	12.7	9.4	7.9	21	0.21
205	326	35	33	27	18	13	7	7	12	14	21	30	33	330


(39)

40	50	67	74	51	46	38	37	37	46	71	62	50	61	65	59
30	27	25	22	17	14	12	6	4	12	17	19	21	24	39	30

(45)

5	143	61	67	83	80	80	69	44	44	43	44	5.7	7.9	7.0	7.6	8.3	F.25
23	241	30	24	25	23	18	13	8	7	11	14	17	19	25	33	222	

Exp. in T.P. 30' H. Sta. 123100

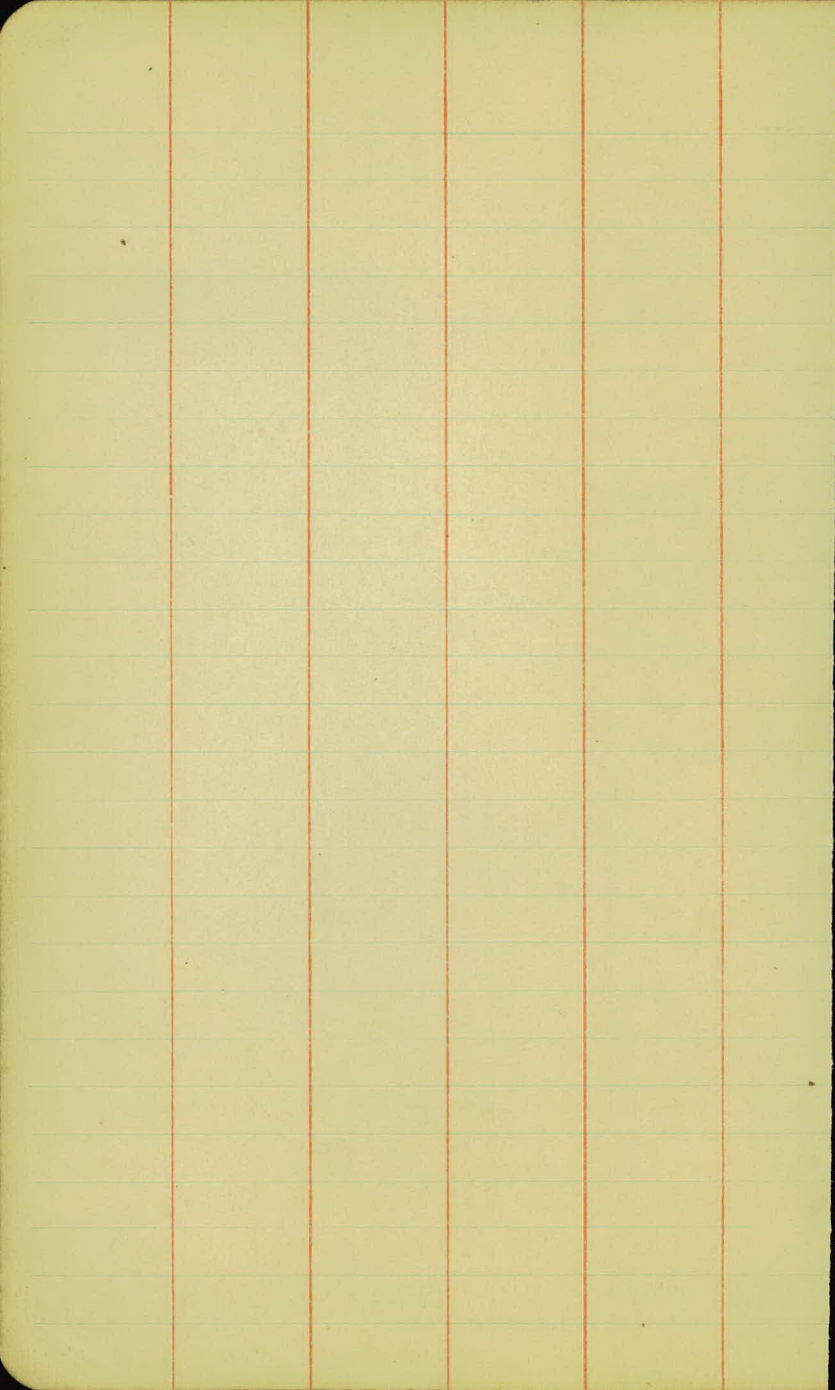

The image shows a page of graph paper with a grid of small squares. A vertical red line runs down the center of the page, creating two columns. The grid is composed of 20 columns and 30 rows of squares. The red line is positioned between the 10th and 11th columns from the left edge.

Sta	Original +	Sec. from H.I. -	Sta. 79.00	to Sta. 104.25	Elev	Grade
P.M.	4.97	295.07 ✓			290.10 ✓	
T.P.	9.90	297.70 ✓	5.27		229.80 ✓	
79			9.7		90.0	10.6 ✓ 289.1
80			9.7		93.0	8.4 291.24
+95			6.7		93.0	7.3 292.4
81			6.7		93.0	7.2 292.27
+10			6.6		93.1	7.1 292.6
+19			6.6		93.2	7.0 292.7
82			6.5		93.2	7.0 292.75
+38			6.5		93.2	7.1 292.6
+43			6.5		93.2	7.2 292.5
83			7.1		92.6	7.6 291.07
+53			7.4		92.1	8.2 291.4

2.709
P.C.B.F.

S.P.H. in Tree 33' Ht. Sta. 48+35

10.6	(0.55)	50	62	72	77	77	10.3	10.4	11.1	11.1	10.4	9.7	8.8	4.1	(0.08)
1.09	31.0	33	38	42	43	7	9	13	15	15	17	24	33	37	26.3

2.4	(0.62)	13	20	28	28	28	22	8.1	8.2	8.2	9.0	9.0	8.6	9.0	5.8	5.0	PC 13
1.07	31.7	33	34	37	35	34	12	7	10	12	15	14	17	23	33	37	248

2.0	2.4	3.0	6.4	7.7	7.0	7.1	8.0	6.9	7.0	3.4
33	34	21	18	15	13	11	7	9	22	34

2.2	(0.51)	2.7	2.2	3.7	4.0	7.6	7.6	6.9	6.7	6.9	7.0	6.6	6.0	(0.09)
1.05	30.6	34	35	28	17	15	13	11	7	10	15	22	33	26.8

2.4	2.5	3.6	5.8	7.4	7.4	6.6	6.7	7.2	6.6	6.4
33	23	19	13	14	12	10	9	17	29	33

2.0	2.5	3.0	5.2	7.4	7.4	6.6	6.7	7.2	6.6	5.4
33	23	19	14	14	12	10	9	15	23	33

2.9	(0.50)	2.0	2.0	5.5	7.4	7.4	6.6	6.5	4.7	7.0	7.4	7.4	6.8	6.5	5.2	4.3	0.09
1.04	30.5	33	22	17	15	14	11	8	8	13	15	16	17	24	31	33	264

2.7	2.8	7.5	7.4	6.7	6.1	6.5	6.5	6.4	4.1
33	22	15	13	11	7	9	17	27	33

1.7	1.8	7.4	7.4	6.7	6.7	6.5	6.9	6.4	6.2
33	22	15	13	11	7	9	13	25	33

2.6	(0.53)	2.0	1.8	8.0	8.0	7.0	7.3	7.4	7.4	8.0	8.0	7.4	6.6	5.0	(0.11)
1.05	31.0	33	33	15	13	11	7	9	12	14	16	19	25	33	26.6

2.0	1.7	4.1	8.7	6.7	8.2	7.7	7.7	7.7	8.5	8.5	7.6	5.5	4.5
33	24	19	14	11	10	6	7	12	15	14	17	19	33

Sta	+	H.I.	-	Elev.	Grade
		279.70			
+60			7.7	92.0	8.4 291.3
+74			8.0	91.7	8.5 291.2
74			8.4	91.3	8.8 290.9
+35			8.8	90.9	9.2 290.5
85			10.1	89.6	10.5 289.2
T.P.	0.22	290.24	9.88	289.82	4.0 286.6
86			3.4	87.0	7.5 283.1
87			7.0	83.6	8.8 281.8
+33			8.2	82.4	11.5 279.1
88			10.2	79.8	10.4 276.6
T.P.	0.57	276.60	10.41	276.23	3.3 277.3
+46			2.4	78.0	3.4 277.2
+49			2.7	77.9	4.1 276.5
+61			3.9	77.3	

28	24	19	41	57	59	59	84	81	80	26	65
37	29	25	22	13	15	13	11	7	10	19	34

84

80

20	20	22	50	90	91	83	83	84	90	90	83	67	62
40	33	24	20	14	12	9	9	13	17	18	19	39	35

0.0.7
52.2

86

18	19	19	19	62	83	93	85	87	89	92	95	92	69	61	0.1.2
50.4	70	33	28	20	15	14	11	9	13	12	18	20	30	33	24.7

92

21	21	21	45	92	96	89	90	93	95	105	105	10.2	28	5.2
40	33	27	22	15	13	10	7	0	15	19	18	17	24	33

0.7.4
33.7

105

25	20	20	21	34	10.2	11.2	11.2	10.9	10.4	10.0	10.2	11.2	11.9	11.5	10.7	0.9	20.1.4
50.4	40	33	31	27	12	14	14	13	8	9	7	14	18	20	23	33	2.9.3

300.75=41.5

301.75=41.5

40

20	0.1.3	16	13	11	3.3	46	40	3.8	40	4.1	3.2	5.2	5.2	5.3	5.1	3.0	0.0.9
50.4	37	43	38	25	18	17	16	13	7	9	13	14	17	26	30	43	26.7

7.5

25	0.1.7	3.5	31	40	40	6.9	8.1	8.1	9.4	25	7.6	8.8	8.8	8.9	9.4	6.0	7.4	5.3	0.2.3	
50.5	33	40	41	40	37	18	16	15	13	8	9	14	15	19	20	23	22	11	4.7	55.2

8.8

5.5	51	53	2.9	2.2	2.7	2.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
46	39	36	16	14	13	7	7	7	14	17	18	19	25	28	42	44	50	42	44	50

0.7.8
33.3

11.5

25	20	24	41	3.9	11.2	11.1	11.8	11.7	11.2	11.1	11.2	11.2	12.0	11.2	11.2	11.2	9.4	2.2	0.0.3	
10.7	40	39	38	27	19	17	14	14	12	7	8	15	18	21	25	32	33	24.0	24.0	24.0

33

3.4	3.2	3.6	3.6	6.0	3.9	3.1	2.6	4.3	4.7	5.9	6.0
33	26	22	18	16	14	11	14	20	24	31	33

34

46	43	38	2.7	2.9	3.5	2.8	5.3	7.3
39	24	20	13	9	11	10	22	33

41

50	4.5	3.1	3.3	3.5	4.0	3.6	6.7	7.6	6.3
33	21	16	10	8	11	16	25	29	33

Sta.	T	H.T.		Elev.	Grade
		180.00 ✓			
+69			3.6	77.0	4.4 276.2
79			4.9	75.7	5.5 275.1
T.P.	0.25	172.00 ✓	2.85	271.75	0.9 271.1
90			0.3	71.7	0.8 269.1
T.P.	0.15	207.85 ✓	4.30	207.70	0.8 207.1
91			0.1	67.8	0.8 207.1
T.P.	0.49	204.51 ✓	3.83	204.02	1.4 203.1
92			0.5	64.0	4.9 203.1
93			4.1	60.4	2.1 203.4
T.P.	1.37	252.73 ✓	7.15	252.34	2.1 252.4
94			1.4	57.3	3.6 255.09
P.M.	3.21	258.29 ✓	3.65	255.08	3.6 254.7
+63			3.0	55.3	4.4 253.85
95			3.9	54.4	4.5 253.8
+04			4.0	54.3	5.6 252.7
+74			5.4	52.9	5.7 252.7
96			5.4	52.7	157.59
+39					

K.

174

44

25	20	33	37	4.4	4.3	8.0	9.2	9.5
39	23	10	7	10	14	22	3.1	33

55

5.5	2.50	14.9	18.0	10.7	10.9	5.1	5.0	5.4	10.2	12.4	F.2.3
10.0	8.2	35	27	25	22	15	8	10	17	24	33

0.9

0.9	F.2.3	5.0	4.4	5.8	6.2	9.4	4.5	0.8	0.9	10.0	10.6	11.9	F.9.8
10.0	12.2	34	30	27	24	12	4	10	14	24	33	38	33.6

0.8

0.8	F.2.3	2.3	2.1	2.5	2.3	0.2	0.3	0.9	0.4	10.0	10.7	11.1	F.10.4
10.0	30.5	35	31	27	35	18	4	7	15	28	38	35	33.6

1.4

1.4	F.2.3	2.1	2.4	2.5	2.1	2.4	0.7	4.6	4.6	8.9	9.8	10.5	F.7.1
10.0	58.2	35	28	27	24	23	12	8	9	14	28	24	33.6

4.9

4.9	F.2.3	2.3	2.4	2.4	2.5	4.4	4.7	4.2	4.5	10.0	10.3	F.7.3
10.0	58.2	30	31	26	24	14	7	8	14	23	28	30.3

2.1

2.1	F.2.3	2.0	2.0	5.4	4.0	1.2	1.3	1.5	1.4	6.9	6.4	F.4.3
10.0	21.4	10	12	25	23	14	9	9	13	21	33	33.6

3.9

5.09 in Tree 80' 17' 34'

0.8	6.8	5.3	2.6	2.1	5.4	3.6	6.4	6.4	5.3	5.1
8.7	21	20	14	8	9	14	19	29	31	34

4.4

4.4	F.2.3	3.6	6.2	6.4	3.4	4.0	4.2	5.1	5.3
10.0	21.4	36	30	27	15	10	10	19	33

4.5

3.8	6.6	6.1	3.6	4.1	4.1	4.8	6.0	6.8
3.5	2.9	2.1	1.9	1.0	7	15	22	33

5.6

2.5	2.6	5.9	5.1	2.5	5.4	3.1	9.3	9.8
3.0	2.3	2.1	1.4	8	7	13	21	33

5.7

5.7	P.C.1.2	2.4	6.5	6.4	5.9	5.7	5.8	5.6	7.8	10.7	F.4.5
10.0	26.7	33	34	23	15	7	7	13	21	33	34.3

Sta.	+	H.I. ✓	-	Elev	Grade
		258.29			
+37			5.4	52.7	378 252.5
97			5.2	53.1	5.6 252.7
98			4.8	53.5	5.3 253.1
99			4.7	53.6	5.0 253.3
100			4.5	53.8	4.7 253.4
101			3.4	54.9	3.9 254.19
+90			1.9	55.4	3.1 255.1
102			2.6	55.7	3.1 255.16
T.P.	4.25	261.58 ✓	1.54	254.93 ✓	
+21			5.0	56.6	4.7 256.9
+39			4.0	57.6	4.5 257.1
+54			3.7	57.9	4.0 257.6
+65			3.4	58.0	3.7 257.9

L4

R1

(54)

7.0	6.3	5.7	5.0	5.9	5.6	9.7	11.1
33	21	14	7	9	13	22	33

(56)

F28	8.8	8.4	5.1	5.2	5.5	3.6	9.4	10.6	11.3	F52
22.2	33	22	15	8	8	14	20	22	33	26.4

(53)

F33	7.7	7.8	8.4	5.0	4.7	5.0	4.7	9.6	10.5	11.1	F56
22.9	39	31	21	14	6	8	14	22	24	33	26.8

(50)

F37	7.2	7.1	8.1	8.3	4.8	5.1	4.9	9.6	9.5	10.5	10.9	F60
22.1	33	31	26	31	15	7	6	14	22	24	33	22.0

(47)

F48	6.1	4.9	7.3	7.0	4.6	4.7	4.8	7.4	7.6	10.2	10.5	10.8	F58
22.5	33	28	23	18	13	7	6	13	20	25	27	33	26.7

(39)

10.6	9.6	4.6	4.2	4.5	4.9	2.6	10.7	11.4	F25
33	22	13	7	8	14	21	25	33	29.2

(31)

28	9.1	3.0	3.1	3.1	2.9	8.9	9.7	10.9
33	22	13	7	7	13	22	27	33

(31)

2.9	2.9	2.9	2.7	2.6	2.5	8.9	9.4	10.4	F63
25.2	33	19	12	4	8	13	23	33	27.3

(47)

5.9	5.9	5.1	5.2	5.0	4.9	11.1	12.0
33	34	15	7	7	13	21	33

(45)

4.2	4.7	4.1	4.1	4.8	4.8
33	18	10	7	29	33

(40)

5.3	4.6	3.4	3.5	3.7	4.7	5.2	5.4
33	22	14	7	7	17	26	33

(37)

11.1	10.6	3.6	3.6	3.6	9.2	10.6	11.1
33	25	12	7	10	20	26	33

Sta.	+	H.I.	-	Elev.	Grade
		241.58			
103			2.9	58.7	258.93
T.P.	5.40	245.80	1.18	240.40	
+63			4.5	61.3	261.1
104			2.7	63.1	262.67
+25			1.4	64.2	263.5
B.M.	8.00	270.98	2.82	262.98	
B.M.			2.39	268.59	268.59

14

14

(27)

$\frac{2.9}{F.0.2}$	$\frac{F.2.5}{30.2}$	$\frac{10.5}{33}$	$\frac{9.5}{24}$	$\frac{2.8}{12}$	$\frac{3.0}{12}$	$\frac{11.0}{27}$	$\frac{11.7}{33}$	$\frac{F.2.5}{31.7}$
---------------------	----------------------	-------------------	------------------	------------------	------------------	-------------------	-------------------	----------------------

(47)

$\frac{13.9}{33}$	$\frac{13.6}{28}$	$\frac{5.2}{11}$	$\frac{4.9}{9}$	$\frac{4.7}{8}$	$\frac{4.9}{15}$	$\frac{11.9}{26}$	$\frac{12.5}{33}$
-------------------	-------------------	------------------	-----------------	-----------------	------------------	-------------------	-------------------

(31)


$\frac{3.1}{3.04}$	$\frac{F.6.3}{27.7}$	$\frac{10.1}{33}$	$\frac{9.7}{26}$	$\frac{3.0}{14}$	$\frac{3.2}{8}$	$\frac{3.1}{9}$	$\frac{3.5}{15}$	$\frac{3.2}{24}$	$\frac{4.0}{33}$	$\frac{D.O. 1.2}{24.9}$
--------------------	----------------------	-------------------	------------------	------------------	-----------------	-----------------	------------------	------------------	------------------	-------------------------

(23)

$\frac{3.5}{33}$	$\frac{3.0}{19}$	$\frac{2.0}{14}$	$\frac{1.8}{8}$	$\frac{1.8}{9}$	$\frac{2.5}{14}$	$\frac{1.5}{17}$	$\frac{1.8}{33}$
------------------	------------------	------------------	-----------------	-----------------	------------------	------------------	------------------

Spk 111 Tree 16 H. Sta. 104 + 00

Spk 111 T.P. 200 H. Sta. 104 + 00

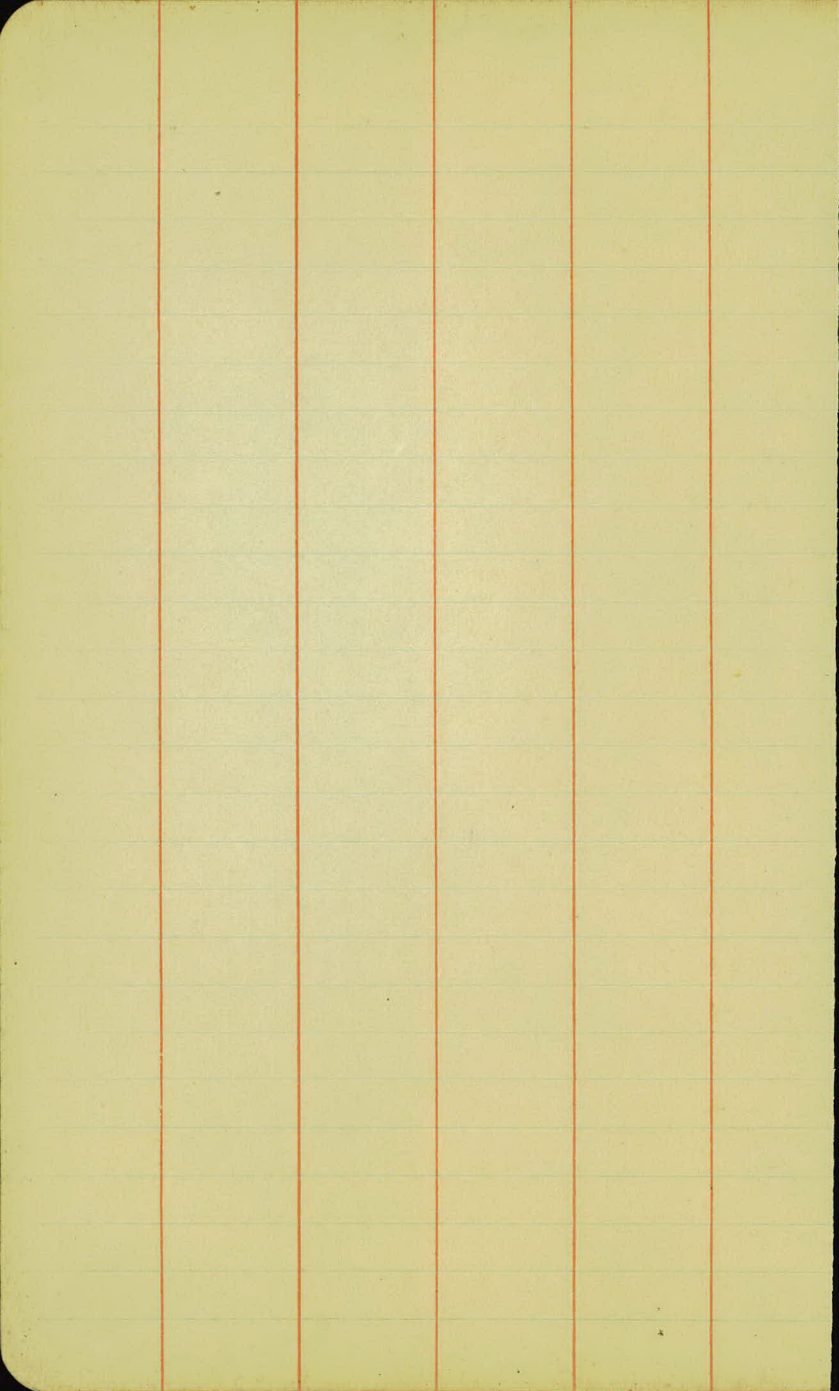

This image shows a ledger page with a grid of 20 columns and 30 rows. A vertical red line runs down the center, dividing the page into two equal halves of 10 columns each. The grid is formed by light green lines. The page is otherwise blank, with no text or data entered.

Original & Sec. from Sta. 52+66 to Sta. 78+94

Sta.	T	H.I.		Elev.	Grade
B.M.	3.37	311.28 ✓		307.51 ✓	
52+66.1			4.6	06.3	5.0 305.9
+86			4.7	06.0	5.0 305.9
53			5.0	05.9	5.0 305.9
+50			5.0	05.9	5.0 305.9
54			4.7	06.2	5.1 305.8
+54			4.6	06.3	5.1 305.8
55			5.0	05.9	5.2 305.7
55			5.5	05.4	5.6 305.35
56			4.1	04.8	6.2 304.6
+61			4.5	04.4	6.7 304.1
57			7.8	03.1	8.2 302.6
58			8.14	302.74 ✓	
T.P.	1.24	303.99 ✓			
+58			1.9	02.1	2.2 301.7

2. Road
C.R.F.

4

87

top of lower school house 500 at south curb Sta 52+00.

5.0	4.9	4.7	4.8
5.0	3.3	2.7	5.0

5.0

5.9	5.4	5.7	5.5	5.0	5.6	5.3	2.3
34	14	11	7	8	18	30	39

5.0

5.0	D.O. 1.0	8.4	7.3	4.1	5.5	5.3	5.2	7.6	7.7	D.O. 0.2
5.0	5.45	3.3	2.7	2.5	1.7	8	14	24	3.4	23.7

5.0

7.3	7.8	7.2	5.3	5.7	5.1	5.1	5.8	6.0	5.8	4.0	6.7
39	27	16	12	7	7	15	18	20	21	27	35

5.1

5.1	D.O. 1.3	5.5	5.9	6.3	6.6	5.1	5.2	4.7	5.2	5.2	4.7	5.0	4.3	D.O.	1.9
3.04	2.72	3.7	3.0	1.7	1.6	1.1	7	7	10	15	17	18	28	35	25.4

5.1

4.4	5.5	5.5	6.1	6.1	5.1	5.1	4.8	5.3	5.1	4.5	4.2
33	23	18	17	16	12	9	11	15	17	27	33

5.2

5.2	D.O. 1.4	5.5	4.8	5.5	6.2	6.2	5.4	5.5	5.1	5.0	5.2	5.8	5.2	5.1	5.8	5.2	D.O. 1.9
2.82	2.58	3.3	2.6	1.7	1.7	1.6	1.3	7	8	12	15	16	17	27	30	33	35.3

5.6

5.6	D.O. 1.5	4.9	5.2	5.0	6.2	6.2	5.6	5.1	5.8	6.5	6.7	6.7	6.1	6.1	6.3	6.2	4.8	D.O. 1.7
4.11	2.60	3.3	2.5	1.7	1.5	1.4	1.1	8	10	12	15	16	17	27	33	33	24.6	

6.2

5.1	5.3	7.1	7.1	6.3	6.3	6.3	6.4	7.5	6.1	4.1	5.2	4.5
34	17	15	12	8	8	12	15	17	21	25	30	

6.7

6.8	D.O. 1.3	6.1	7.1	7.7	7.7	6.7	6.7	6.7	7.5	7.5	6.0	7.4	6.1	4.5	D.O. 1.4
4.03	2.58	3.2	1.7	1.5	1.1	8	8	13	15	14	18	27	31	33	27.7

6.7

5.3	D.O. 1.8	7.1	8.5	8.1	8.4	8.3	6.9	8.5	7.5	9.3	9.1	9.0	8.2	9.1	8.2	D.O. 1.2
2.15	2.53	3.3	2.1	1.1	1.1	7	7	12	15	14	17	25	27	30	34	24.2

6.7

5.1	3.7	6.8	4.1	4.2	4.5	4.2	2.3	3.1	3.1	2.5	1.5	2.9	2.7
33	24	23	17	14	7	7	10	15	16	17	21	30	39

S/a	+	H.I. ✓	-	Elev.	
		313.98			
59			2.9	02.1	28 311.1
60			4.2	99.8	4.3 299.6
61			5.0	99.0	5.3 298.0
P.M.	2.31	304.65 ✓	1.67	302.31	302.31 +
P.M.			7.82	96.9	
62			5.8	98.9	6.1 298.4
63			5.1	99.6	5.6 299.1
+30			4.7	99.8	5.5 299.2
64			4.7	99.8	5.3 299.35
T.P.	2.51	308.89 ✓	5.27	299.38	
+59			2.4	99.5	9.7 299.2
65			9.5	99.4	9.8 299.1
+78			9.8	99.1	10.2 298.7
+87			7.8	99.1	10.2 298.7
+94			9.8	99.1	10.3 298.6

(28)

2.2	F. 32	53	43	56	34	3.5	5.1	34	43	54	52	5.0	2.7	F. 22
0.0	222	53	38	14	12	8	9	12	14	32	38	30	33	219

(43)

4.4	F. 33	53	38	21	47	46	4.5	4.4	27	26	4.9	4.7	F. 21
3.02	222	33	27	17	12	9	7	12	19	21	33	33	222

(53)

5.4	F. 53	104	101	107	103	5.6	5.4	5.4	5.3	5.8	9.5	11.5	12.0	F. 6.3
1.04	222	33	28	37	21	12	9	9	11	13	17	30	33	219

F. 11 T. 20 R. 54 67+74

(61)

6.1	F. 46	162	104	105	63	63	6.1	6.1	9.1	9.6	9.7	F. 32
3.03	222	33	29	33	14	9	10	15	20	39	33	222

(66)

5.6	F. 35	85	84	64	46	52	5.7	6.1	8.4	10.6	F. 31
6.5	222	33	31	21	14	10	9	13	19	32	222

(55)

5.1	5.0	24	64	21	67	58	55	5.1	5.0	7.1	9.1	9.9	8.6	
33	3	34	24	33	21	18	14	9	10	15	18	20	21	33

(53)

5.3	10.14	10	52	61	62	64	54	5.3	5.5	6.2	6.2	6.0	1.7	1.6	0.35
2.4	222	33	37	19	18	17	15	11	9	12	15	17	19	24	33

(27)

5.0	6.3	8.9	10.5	10.5	9.8	9.6	9.6	10.3	10.5	8.	8.8	3.9	3.9
33	27	18	16	15	12	7	13	16	17	19	33	39	33

(98)

9.8	2.2	5.2	6.1	9.5	10.6	10.5	10.1	9.9	9.7	9.9	10.5	10.5	9.5	9.6	1.0	1.0	0.87
1.03	222	33	32	18	16	15	14	9	6	12	15	14	19	25	34	37	342

(10.2)

9.7	8.5	7.2	7.7	2.5	9.8	10.0	10.0	9.2	8.1	1.9	1.3
33	25	14	7	9	14	15	16	18	25	32	35

(10.2)

5.0	9.3	9.2	9.8	9.5	9.4	9.9
33	13	6	8	10	19	33

(10.3)

7.3	7.5	9.3	3.1	10.1	9.7	9.6	9.2	9.4
33	37	21	14	8	8	11	19	30

Sta.	+	H.I.	-	Elev.	
		308.89			
64			2.8	99.1	10.3 298.6
+15			2.7	99.0	10.3 298.6
67			11.0	97.9	11.4 297.5
+41			11.7	97.2	12.1 296.8
T.P.	0.49	297.71	11.67	297.22	2.0 295.74
68			1.4	96.1	2.0 295.74
69			4.1	93.6	4.7 292.97
+58			6.1	91.6	6.9 290.8
70			7.6	90.1	8.2 289.5
+25			8.4	89.1	10.2 287.5
T.P.	4.24	293.22	8.73	288.98	7.2 286.1
71			6.9	86.3	7.2 286.1
+34			5.2	85.0	8.4 284.8
+49			8.4	84.6	9.1 284.1
T.P.	0.77	285.40	7.61	284.61	

H.

HT.

10.3

0.3	0.28	73	73	84	101	101	99	95	84	5.2	0.29
2.05	2.03	33	37	30	16	8	9	17	25	33	23.9

10.3

7.4	7.3	8.1	11.2	11.3	9.9	10.1	7.9	10.1	11.2	9.6	8.0	1.7	1.7
3.3	2.8	7.9	16	7	1.4	8	7	14	17	18	25	5.2	3.5

11.4

1.4	0.28	73	87	103	117	117	112	11	11.3	11.6	12.2	12.3	11.4	9.4	2.4	5.4
2.04	2.03	33	34	71	15	14	12	8	9	13	16	17	19	25	33	25

12.1

8.7	8.8	10.8	11.3	12.7	12.7	12.2	11.9	12.0	12.5	12.9	12.0	4.5	4.5
3.3	3.8	3.6	7.8	16	5	13	9	8	13	17	23	33	35

2.0

1.8	0.02	14	14	2.3	2.7	2.7	2.3	1.9	2.2	2.8	2.9	2.9	0.0	0.0	1.3
2.03	2.03	3.3	2.5	2.1	1.7	1.6	1.4	9	9	13	17	23	32	2.4	2.4

4.7

1.3	0.02	0.4	6.2	6.5	5.9	4.4	4.2	4.3	4.4	4.0	0.03
1.00	2.03	3.3	3.7	2.2	1.8	1.2	9	11	17	33	25.8

6.9

8.0	8.1	6.5	6.4	6.7	6.7	8.0	8.0	7.9	8.2	9.3
3.3	7	12	7	11	10	13	20	21	30	33

8.2

1.2	0.2	8.0	8.9	8.7	7.4	8.1	8.2	8.8	10.5	10.0	10.0	12.0
1.06	2.03	3.3	3.3	1.7	8	11	15	17	24	31	33	21.0

10.2

7.0	7.7	7.7	8.8	8.7	9.1	9.3	11.3	11.0	9.3
3.3	2.4	1.5	11	8	7	10	20	28	33

7.2

1.2	0.56	1.5	2.0	8.0	8.0	7.2	7.4	7.5	7.4	8.3	7.9	7.4	5.0	0.0
1.03	3.11	3.3	3.8	1.7	1.5	1.2	7	10	15	19	23	25	33	24.0

8.4

1.5	3.8	10.2	10.2	8.6	8.5	8.4	8.0	9.8	8.1	7.4
3.8	2.9	2.0	1.6	1.3	7	9	14	17	22	33

9.1

5.6	11.2	11.2	9.2	8.7	7.1	7.2	11.3	11.7	9.2	0.5
3.3	2.3	1.8	1.3	8	10	13	17	17	31	33

S+4	+	H.I.	-	F/Ex	
		285.40			
+60			1.1	84.3	1.7 283.7
72			2.4	83.0	2.9 282.5
+10			2.7	82.7	3.3 282.1
73			5.2	80.2	5.7 279.7
T.P.	1.90	281.56	5.79	279.66	3.2 279.7
74			2.4	79.2	3.2 278.3
75			2.8	78.8	3.3 277.9
+47			2.7	78.9	2.8 278.8
+54			2.6	79.0	2.7 278.9
+64			2.5	79.1	2.6 279.0
+70			2.4	79.2	2.5 279.1
76			1.7	79.9	1.9 279.7
	7.24	288.48	0.32	281.54	6.0 282.5
77			5.7	82.8	6.0 272.5

11

11

1.7

13 31 40 15 14 17 18 39 41 34 38
 21 28 19 12 9 9 11 27 19 21 33

29

F.3.9 38 46 63 28 27 2.2 2.9 4.2 5.4 5.6 F.5.4
 23.8 33 27 19 13 8 9 13 22 31 33 32.1

33

5.0 6.4 6.4 3.0 3.1 3.0 3.3 6.8 2.1 2.5
 3.3 2.7 1.9 1.2 7 4 14 20 27 33

57

F.5.1 10.4 10.3 5.3 5.4 5.3 5.7 11.0 11.9 F.6.1
 35.2 33 19 11 7 11 13 23 33 27.1

32

F.4.2 2.1 2.3 2.5 2.4 2.4 2.7 14.2 11.7 F.5.2
 20.3 33 30 12 12 6 12 2.9 3.5 31.3

33

F.5.1 2.5 2.1 2.4 2.6 3.0 3.1 3.5 2.1 2.8 2.7 F.6.7
 25.0 33 27 27 20 12 7 9 14 23 29 33 28.5

28

5.7 8.6 9.1 9.1 2.9 2.8 3.0 3.6 3.5 2.5
 3.3 2.9 2.7 2.3 1.3 4 9 12 15 33

27

2.7 3.0 4.9
 7 13 33

26

2.8 3.7 5.9
 10 17 35

25

5.8 2.7 2.5 2.4 2.8 2.7 7.0 2.4
 3.1 2.3 1.3 7 7 14 25 35

19

F.6.8 8.6 8.6 2.9 1.4 1.7 2.1 2.8 9.6 10.0 F.7.9
 20.4 33 30 23 12 8 9 14 27 33 34.8

60

F.4.5 10.6 10.1 5.8 5.8 6.0 6.0 12.2 13.3 13.0 F.7.4
 24.7 33 21 13 5 7 15 24 31 33 30.1

5.7
 2.05

5.3
 2.09

7.3
 6.5

7
 6.2

6.0
 6.3

Sta.	+	H.I.	-	Elev.
		188.48 ✓		
+67			3.4	84.9 284.7
78			2.3	86.2 286.0
T.P.	7.52	195.53 ✓	2.47	186.01 ✓
+16			2.6	86.9 286.5
+94			5.8	89.7 288.9
B.M.			5.44	170.09 170.10

(3.8)

(0.05)
2.0

1.5	1.7	2.1	2.5	3.3	3.3	3.5	2.0	2.5	2.9	3.0	4.3	6.0	6.9	(K13)
2.2	3.3	3.5	7.8	7.4	7.4	7.2	7	11	14	20	29	39	33	19.7


(9.0)


7.9	8.3	9.7	9.7	9.0	8.9	8.9	2.1	9.1	8.7
3.3	8	14	13	13	4	11	21	29	33

(6.6)

4.5	5.3	6.0	6.3	6.3	7.1	7.1	4.5	6.0	2.9
3.5	2.0	7	7.0	7.0	15	16	17	2.7	3.8

S.P.K. in T. 33 19, 37, 41, 78 + 35.

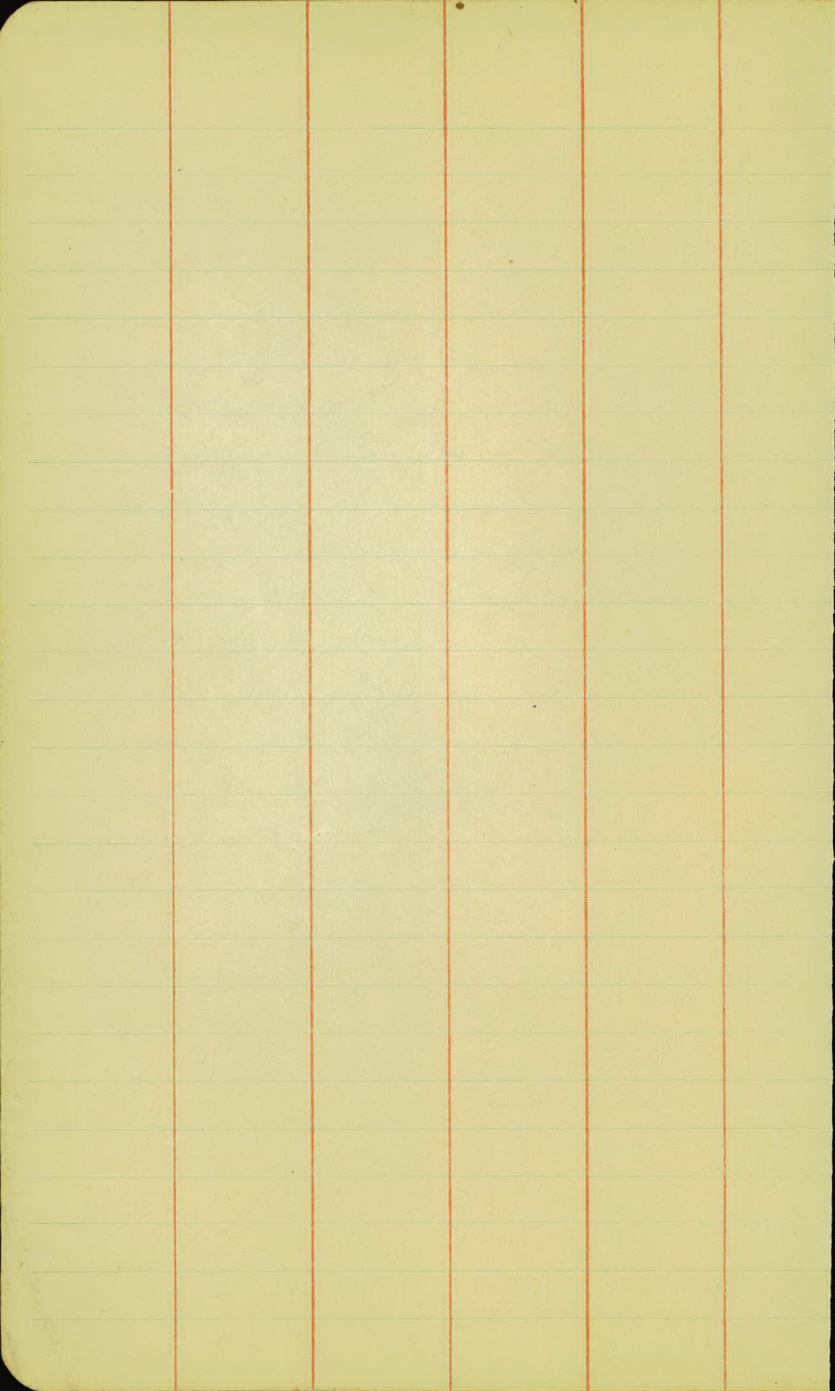

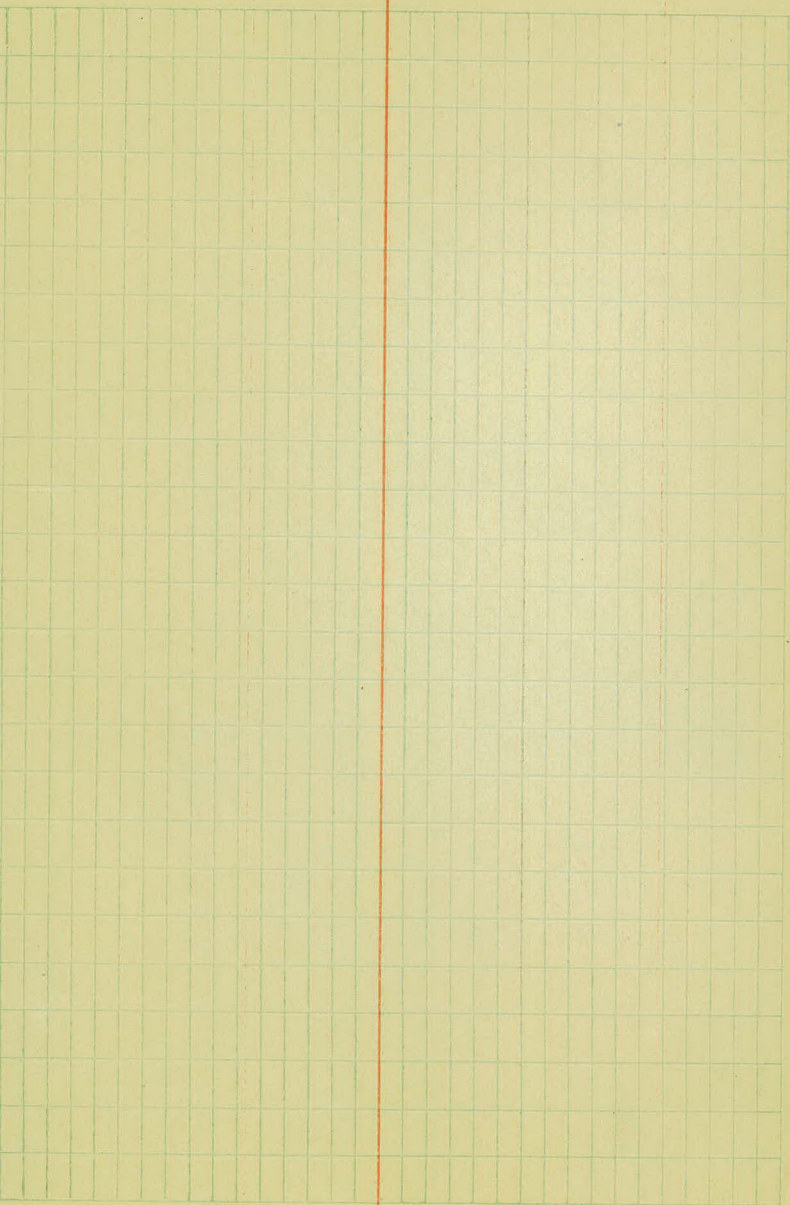

Original X Sec. from sta 4700 to sta 52747

Sta.	T	H.I.	-	Elev.	Grade
P.M.	3.53	303.53 ✓		300.00 ✓	
- 11			4.0	99.5 ⁴⁴	299.1
0+00			4.0	99.5 ⁴⁴	299.1
+17			4.4	99.1 ⁴⁴	299.1
+25			4.5	99.0 ⁴⁴	299.1
1+00			4.4	98.9 ⁴⁸	298.75
1			5.1	98.4 ⁵⁵	298.15
3			6.0	97.5 ⁶⁸	296.75
+50			7.0	96.5 ⁷⁵	296.0
T.P.	1.64	295.72 ✓	8.27	95.2 ⁸⁴	
4			1.7	95.2 ^{1.9}	295.00
+39			2.7	94.2 ^{2.0}	294.3
5			3.2	93.1 ^{3.9}	293.0
6			4.5	92.4 ^{5.0}	291.9

21 Nov
C.B.F.

44 in Tel. Pole S.E. Cor. Lak. & Lapp

4.1 4.0 4.1 4.5 4.4
32 14 12 15 33

3.6 3.8
33 33

5.0 4.9 4.3 4.1 4.2 4.6
33 24 12 15 25 33

3.3 3.5 5.0 4.9 4.5 4.2 4.7 5.0
33 27 25 17 11 14 21 33

7 0.18 2.8 3.1 5.7 5.9 5.0 5.0 4.8 4.2 6.6 6.3 5.4 P.C. 0.6
01 3.3 33 29 21 18 15 9 8 18 17 27 33 33

5 0.19 3.7 3.8 2.0 2.0 5.9 5.4 5.4 6.9 6.2 5.9 P.C. 1.0
04 3.4 33 30 25 22 17 12 10 17 26 33 33

7 0.27 4.1 4.1 2.1 2.3 6.7 6.4 6.4 6.8 7.5 7.5 7.2 6.9 6.4 P.C. 1.9
07 3.2 33 27 21 21 16 10 9 14 18 19 21 29 33 33

6.7 7.1 2.5 2.6 7.5 7.3 7.3 7.5 8.3 6.4 5.2
33 27 33 21 14 10 9 13 15 21 33

7 0.40 2.2 3.6 4.3 3.9 1.3 1.9 4.1 2.1 4.8 5.4 5.4 4.7 4.7 P.C. 1.7
02 3.3 33 25 22 20 13 9 9 13 23 26 27 29 33 33

4.6 5.8 6.4 6.2 3.1 2.9 3.6 3.2 2.1 2.4 6.7 6.9
33 25 23 20 14 9 9 13 22 26 28 33

7 1.51 2.6 2.7 2.9 3.9 4.0 2.3 4.3 2.2 2.6 2.4 2.7 F.S. 3
01 3.6 33 27 21 13 10 14 24 29 29 33 33

5.0

0 1.46 2.0 2.6 2.0 5.1 4.9 4.9 5.0 2.3 2.9 2.7 F.S. 2
05 1.9 33 24 20 13 9 9 12 19 26 33 33

Sta.	+	H.I.	-	Elev.
		276.92 ✓		
7			4.5	92.4 43 292.2
7			4.2	92.7 45 292.4
7			3.1	93.2 40 292.7
10			2.2	94.7 28 294.1
T.P.	2.50	304.20 ✓	2.22	302.20 ✓
11			2.6	96.6 81 296.1
	+2.5		2.2	97.0 74 96.8
	+3.1		2.0	97.2 71 97.1
	+4.4		4.6	97.6 69 97.3
	+5.2		6.4	97.8 68 97.4
12			5.0	299.2 5.4 298.2
T.P.	6.79	307.49 ✓	1.20	303.00 ✓
	+3.1		9.7	300.1 10.1 299.7
13			7.7	02.1 82 301.4

9																					
04	F.49	23	26	27	29	47	48	48	71	103	101	95	F.55								
	253	33	27	31	73	8	8	12	21	24	29	33	268								

5																					
23	F.51	29	26	24	51	49	45	49	26	27	27	9.8	9.2	F.53							
	246	33	35	50	13	10	9	12	18	20	22	26	33	255							

0																					
03	F.49	23	28	28	45	42	42	4.2	77	8.2	8.5	8.2	F.42								
	258	33	24	21	14	9	8	11	18	25	27	33	248								

8																					
06	F.34	55	58	62	31	21	21	2.7	51	5.5	5.5	F.27									
	238	33	25	20	14	9	9	18	17	24	33	22.0									

1																					
03	F.34	109	114	115	23	21	21	8.0	10.5	10.8	10.5	10.4	F.27								
	231	33	35	20	14	10	9	12	20	22	27	33	22.0								

	10.2	29	26	26	2.4	10.2	10.1	9.8													
	33	23	15	9	12	21	27	33													

	7.9	27	24		7.2	9.8	9.9	9.6													
	33	11	9		12	24	27	33													

	8.6	2.8	2.1	4.3	3.1	2.6	2.6	9.3													
	33	20	8	10	14	21	27	33													

	2.5	2.8	2.0		4.4	9.3	2.8	9.1													
	33	21	12		11	20	27	33													

4																					
04	F.24	7.4	7.8	5.5	5.2	5.4	6.4	8.5	8.3	7.9	F.25										
	214	33	19	12	8	13	18	21	27	33	217										

Sta. 13+21

	10.5	11.3	11.4	10.2	10.1	10.1	10.4	11.8	11.9	11.2	10.9										
	33	24	17	14	9	9	14	21	24	24	33										

2																					
05	01.6	6.3	6.4	2.9	2.3	2.9	2.9	2.1	2.4	2.3	2.8	2.6	7.2	C.10							
	33	33	24	17	14	13	9	8	12	14	17	25	33	330							

	+	309.99 ✓			
14			5.0	304.85 ⁵	304.3
T.P.	9.48	313.58 ✓	3.89	305.90 ✓	
15			9.1	06.57 ¹	305.9
16			6.5	07.1 ¹²	306.4
+29			4.4	07.0 ¹³	06.3
+39			4.7	06.9 ¹³	06.3
+52			6.9	06.7 ¹⁴	06.2
+60			7.0	06.6 ¹⁵	06.1
17			7.3	06.3 ¹⁸	305.1
+24			7.4	06.0 ¹⁷	05.3
B.M.			4.6	302.72 ✓	302.93
T.P.	1.41	306.67 ✓	8.30	305.28 ✓	
18			2.1	04.6 ²⁶	304.1
19			3.4	03.1 ⁴⁰	302.7
20			4.5	02.2 ⁴⁹	301.9

(0.52)
330

(53)

55	20	22	34	44	49	62	69	55	55	55	56	65	65	47	27	14	15	0.59
0.5	35	33	50	25	17	16	15	12	8	8	12	16	17	19	25	33	35	0.20

(71)

77	0.41	31	31	57	67	21	21	77	76	75	31	21	5.6	35	29	20	2.28
0.4	330	35	33	29	17	15	14	2	2	2	15	14	19	26	32	25	0.20

(72)

0.2	0.34	37	32	62	65	13	75	67	67	0.9	69	42	9.2	16	14	14	0.58
0.7	330	35	39	29	16	15	14	12	9	9	12	14	16	27	33	35	0.20

(73)

5.5	67	7.3	77	71	67	64	24
33	27	14	15	12	10	19	33

(73)

6.5	67	7.3	30	71	67	5.8
33	30	18	16	12	10	33

(74)

78	27	32	22	26	23	6.7	5.7
33	30	17	12	10	7	7.5	33

(75)

8.3	8.3	8.3	4.5	71	65	30
33	21	19	12	11	15	33

(78)

78	0.5	25	26	100	29	77	77	84	25	82	82	52	24	0.215
0.5	33	35	24	23	19	10	9	15	14	18	25	31	33	15.0

(83)

27	100	84	82	10	27	27	26	65	62
33	25	27	11	11	17	16	18	26	33

PK. in Tree 56' 81' 57' 17 + 12.

(26)

0	F.11	4.3	4.3	1.5	2.4	2.0	2.4	2.5	4.1	4.3	4.2	0.20.03
0.5	170	33	30	32	14	11	9	9	23	26	25	33

(40)

0	F.30	6.4	6.5	6.9	5.0	4.0	3.8	3.8	6.7	7.0	6.8	F.30
4	330	33	26	21	11	9	7	13	17	24	33	22.0

(49)

9	F.30	6.2	5.9	7.4	5.0	4.9	4.8	4.6	6.6	7.5	7.1	F.30
14	330	33	31	25	13	10	8	12	17	24	33	21.0

306.69 ✓

21			5.0	01.7	5 ⁵⁵	301.2
22			5.2	01.5	5 ⁵⁸	300.9
23			4.7	02.0	5 ⁵⁶	301.1
24			4.8	01.9	5 ⁵⁴	301.3
T.P.	5.12	307.04 ✓	4.81	301.21 ✓		
25			4.9	02.1	5 ⁵⁶	301.5
26			4.6	02.5	5 ⁵⁴	301.7
+20			4.6	02.5	5 ⁵²	301.9
139			4.7	02.4	5 ⁵³	01.8
+54			4.9	02.5	5 ⁵³	01.8
+43			4.6	02.5	5 ⁵¹	01.9
27			4.7	02.3	5 ⁵²	01.9
28			4.9	02.7	5 ⁵⁰	302.1
B.M.			2.77	304.27 ✓		304.28

11

R4

55

5.5	F.2.8	8.2	8.1	7.9	5.0	5.5	5.3	5.3	6.7	7.3	7.0	7.0	D.O. 2
10.5	217	33	21	17	12	9	8	13	17	23	24	23	20.2

58

5.8	D.O. 5.7	7.0	7.5	7.3	5.0	5.0	5.4	5.2	6.0	7.2	6.3	D.O. 2.8
10.6	239	35	25	17	13	9	7	13	17	23	23	24.3

56

5.6	D.O. 1.3	5.8	6.0	6.2	6.1	5.1	5.2	5.0	4.7	5.3	5.2	6.3	5.7	5.7	D.O. 1.3
10.9	248	37	27	20	15	13	9	7	13	15	14	23	16	33	24.8

54

5.4	F.2.6	6.8	7.4	7.1	5.4	5.2	5.3	5.4	7.6	7.9	7.6	F.2.6
10.6	210	33	21	18	13	9	7	13	18	24	23	21.2

56

5.6	F.2.7	7.0	7.0	7.7	5.3	5.4	5.1	5.3	7.5	8.1	7.4	F.2.7
10.7	218	35	23	19	13	7	8	13	18	26	23	20.5

54

5.4	D.O. 0.9	5.6	6.0	7.2	5.4	5.2	4.7	5.1	6.0	7.0	6.5	5.7	D.O. 0.9
10.8	244	33	23	17	14	10	7	13	17	23	25	23	23.4

52

6.0	6.1	6.3	5.4	5.4	5.2	5.0	5.6	6.4	4.2	5.3
35	25	20	17	14	10	7	14	23	24	23

53

5.1	4.1	4.7	4.3	4.2
33	10	4	13	23

53

5.5	5.7	5.2	4.7	4.7	4.3	4.3
35	24	18	9	13	26	23

52

6.0	6.1	6.0	4.8	5.0	4.7	5.0	7.0	7.0	4.0	4.6
33	25	18	13	9	8	13	17	25	30	20

52

5.2	D.O. 0.7	5.8	6.1	6.1	6.1	5.1	5.0	5.0	4.7	7.1	8.2	7.7	4.8	F.3.1
10.4	246	34	25	19	18	14	9	8	11	10	22	25	23	22.5

50

5.0	F.2.5	7.4	8.0	7.7	4.9	4.9	4.8	5.0	7.0	8.1	F.2.5
10.6	214	33	24	20	14	10	8	12	20	33	22.0

SpM in Tree 105 Lt. SpM 28 + 0.4

	+	30700. ✓	-		
29			4.0	03.1	46 3025
30			3.5	03.6	41 3030
31			2.7	04.4	34 3037
T.P.	7.55	311.91 ✓	2.70	304.39 ✓	
32			4.0	05.1	29 3044
33			6.0	05.6	68 3051
34			5.7	06.2	61 3058
T.P.	5.57	313.25 ✓	4.05	307.88 ✓	
35			6.2	07.1	68 3065
36		*	5.6	08.7	61 3072
37			5.1	08.2	54 3079
38			4.4	08.9	47 3086
39			3.5	09.8	40 3093
40			3.2	10.1	33 3100

46

4.4	F.35	77	77	71	72	74	73	45	43	45	73	77	73	60	F.81
2.06	252	33	34	33	22	28	15	9	8	12	17	24	27	33	222

41

4.1	F.22	5.4	5.4	6.3	33	40	38	39	52	52	52	45	P.C.10
2.06	213	33	24	21	18	9	8	12	15	18	24	33	245

34

4.4	P.C.00	4.7	4.7	4.6	38	32	2.9	3.1	3.9	4.0	3.0	3.9	3.5	P.C.17
2.7	281	33	21	16	9	9	7	12	13	15	14	25	33	292

75

7.2	P.C.12	7.6	7.4	7.8	7.5	7.2	7.1	7.2	7.3
2.7	223	33	24	15	13	8	9	20	33

68

6.8	P.C.09	8.0	7.7	7.4	7.0	7.0	6.8	6.6	6.6	7.8	7.8	7.3	7.7	7.2	6.9	P.C.16	
2.5	284	33	21	17	14	15	11	9	8	11	14	15	17	20	20	33	291

61

4.1	P.C.07	7.4	7.3	6.8	7.3	7.2	6.2	6.0	4.1	6.2	6.9	6.9	6.2	6.3	P.C.17
2.4	283	33	23	17	14	15	12	7	8	12	13	15	17	33	292

68

6.8	C.05	6.3	6.5	4.9	6.5	6.5	6.4	7.2	7.2	6.4	4.2	5.5	C.14
2.06	320	33	30	13	8	8	12	15	14	17	24	33	303

61

6.1	C.07	5.1	5.4	6.8	6.1	6.0	5.9	6.0	6.6	6.6	5.8	5.9	4.7	C.10	
2.5	307	33	14	10	14	12	7	8	12	15	16	17	26	33	305

54

4.4	P.C.21	7.4	7.3	5.4	5.6	5.2	5.7	6.0	6.5	P.C.00
2.3	284	33	21	12	9	9	14	20	33	283

47

4.7	P.C.09	5.5	6.2	5.3	5.0	4.9	5.5	6.9	6.3	P.C.05
2.3	278	33	20	17	9	11	18	21	33	240

40

5.0	P.C.13	7.5	4.7	4.7	4.2	4.0	3.9	3.9	4.3	P.C.18
2.5	278	33	36	14	12	8	10	10	33	253

33

2.3	F.3.1	4.6	6.2	3.6	3.6	3.3	3.3	4.3	4.3	4.1	4.4	4.3	3.7	3.5
2.1	22.6	33	20	12	7	9	13	16	17	18	20	28	31	33

313.25 ✓

+1			2.3	11.0	26	310.7
T.P.	7.64	315.77 ✓	2.14	311.11 ✓		
+2			4.7	12.1	74	311.4
+3			6.0	12.8	68	312.0
+4			6.3	12.5	67	312.1
+58			6.4	12.4	67	12.1
+5			6.7	12.1	74	111.4
+72			7.7	11.1	84	10.4
46			8.1	10.7	86	310.2
+7			7.4	09.4	99	309.7
+14			7.7	08.9	102	08.6
T.P.	3.97	312.55 ✓	10.19	308.58 ✓		
+8			4.7	07.9	50	307.4
49			5.5	07.1	59	306.4

54

(26)

P.O. 11
246

2.16	5.24	5.5	4.7	3.0	2.6	2.6	2.7	3.5	3.5	2.9	3.4	3.7	3.3	3.3
2.05	3.16	3.9	3.8	1.4	7	7	1.8	1.5	1.6	1.8	2.0	2.6	2.8	3.3

(7.4)

2.4	4.09	4.3	2.8	2.8	2.1	1.7	2.0	2.0	2.0	2.0	1.8	2.5	2.5	2.0
2.87	2.04	3.5	1.9	1.5	1.3	1.1	7	8	1.8	1.5	1.4	1.8	2.3	3.3

(6.8)

2.5	0.14	5.2	4.1	4.9	4.9	4.2	4.3	4.4	7.1	7.3	6.7	4.1	0.14	
2.02	2.07	3.8	1.4	1.4	1.4	1.0	7	10	1.4	1.9	1.8	3.3	2.6	

(6.7)

2.7	0.18	7.1	4.5	7.1	7.4	7.7	6.6	6.4	6.6	7.2	7.2	6.6	5.8	6.1
2.04	2.57	3.3	2.3	1.6	1.5	1.4	1.2	7	9	1.4	1.5	1.6	1.8	3.3

(6.7)

6.6	2.1	2.7	2.1	2.5	2.5	2.4	4.2	4.7	4.6	4.8	4.5	2.4	
3.3	2.5	2.4	2.0	7	1.6	1.5	9	9	1.8	1.7	1.8	3.3	

(7.4)

2.4	4.0	7.4	7.5	6.7	7.3	7.1	7.3	2.0	7.0	7.3	7.7	7.9	7.3	6.8	6.3	3.2
2.67	3.5	3.3	2.0	1.6	1.5	1.4	1.2	8	8	1.5	1.4	1.6	1.7	2.5	3.0	2.1

(8.4)

1.3	1.1	1.0	8.7	8.3	8.2	8.3	8.7	8.7	8.2	8.0		
3.8	3.1	1.9	1.4	9	8	1.3	1.4	1.5	1.7	3.3		

(8.6)

2.6	0.02	1.07	1.0	9.8	8.7	8.6	8.4	3.6	2.2	2.2	2.5	2.7	2.7	0.0	1.0
2.05	3.3	3.5	2.1	1.8	1.2	8	7	1.3	1.4	1.4	1.7	2.3	3.3	2.5	2.5

(9.9)

2.0	0.12		2.6	2.7	2.8	2.1	1.1	1.0	1.0	1.0	2.2	2.2	0.0	0.0
2.05	2.57		3.3	1.8	8	8	1.5	1.4	1.4	1.7	3.3	2.1	2.1	

(10.2)

1.07	11.2	11.5	11.5	10.4	10.4	10.4	10.5	11.2	11.2	10.8	11.4	11.2	
3.3	7.9	1.7	1.6	1.3	8	8	1.5	1.5	1.6	1.7	2.1	3.3	

(5.0)

2.0	4.6	4.4	6.8	6.4	6.3	4.9	5.1	4.9	5.0	6.1	6.9	6.9	0.0	0.0
2.03	3.4	3.9	2.9	2.4	2.2	1.5	8	8	1.3	1.4	2.2	3.3	2.3	2.3

(5.9)

2.9	0.43	6.5	7.2	7.0	5.8	5.9	5.8	6.0	6.0	8.1	8.5	7.2	2.3	
2.84	2.3	3.8	3.8	1.7	1.3	8	1.1	1.4	1.9	2.5	3.3	2.1	2.4	

312.55 ✓

+67	5.7	06.9	6.4	06.2
50	5.8	06.8	6.4	306.2
+17	5.8	06.8	6.4	06.2
+50	5.9	06.7	6.5	06.1
51	5.9	06.7	6.5	306.1
+14	6.0	06.6	6.5	06.1
+55	6.0	06.6	6.6	06.0
52	6.1	06.5	6.6	306.1
+20	6.2	06.4	6.7	05.9
+47	6.2	06.4	6.7	05.9
B.M.	5.01	307.5	✓	307.51

> check L

71

64

10.5	10.5	5.8	6.1	6.1	6.0	8.5	9.2
37	24	13	8	8	13	19	33

64

12.3	9.6	9.4	8.7	5.8	6.0	6.1	6.0	4.7	7.1	10.0	11
21.4	33	25	25	14	7	4	12	14	33	26.6	

64

8.3	8.1	8.9	5.8	4.0	6.1	6.1	6.0	5.3
33	23	21	18	13	8	4	13	33

65

6.5	6.4	8.7	8.4	6.0	6.2	6.1	6.1	6.3	5.6	4.3
33	22	22	19	13	8	4	13	16	17	33

65

10.5	10.5	5.8	6.1	6.1	6.0	6.4	6.7	4.7	5.8	6.1	10.1				
20.5	21.4	33	24	23	20	17	15	9	8	12	14	16	17	33	26.6

65

6.5	7.0	6.7	6.7	6.4	6.4	6.5	7.1	7.0	6.1	5.5
33	22	17	15	8	8	12	15	17	19	33

66

6.4	6.8	6.8	6.5	6.5	6.8	7.0	8.1	8.7	8.7	8.7
33	25	15	9	11	15	14	21	22	24	33

66

10.1	7.3	7.3	6.6	6.7	6.6	7.0	7.8	7.9	10.1	10.1
21.4	33	14	11	9	9	13	22	27	33	26.6


67


8.1	7.7	7.1	7.2	6.7	6.8	7.3	8.2	10.0	10.0
33	27	16	11	9	9	15	20	25	33

67

7.7	7.3	6.0	6.8	
33	21	11	9	33

Top of lower conical house stop S. end. H. Sta. 54+00.

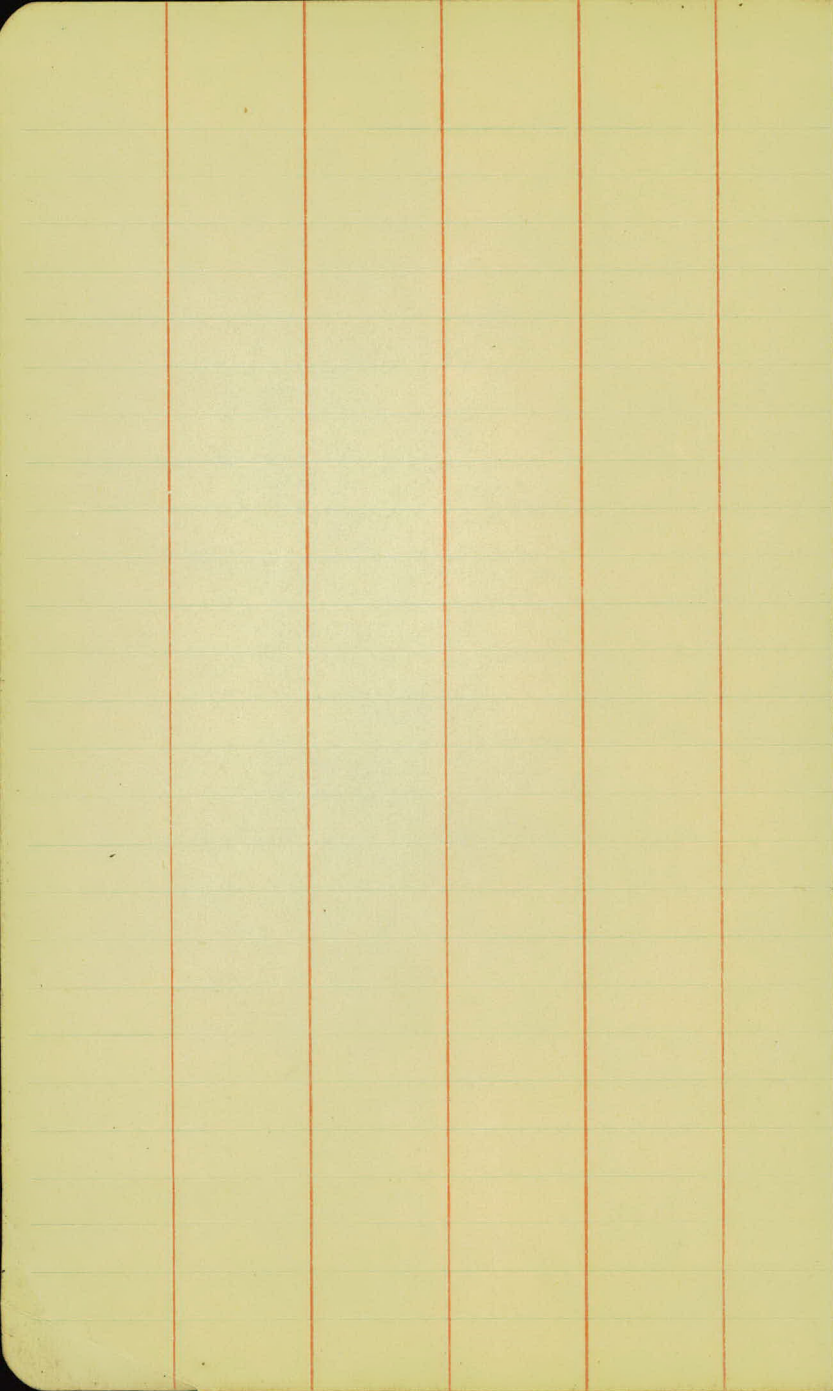

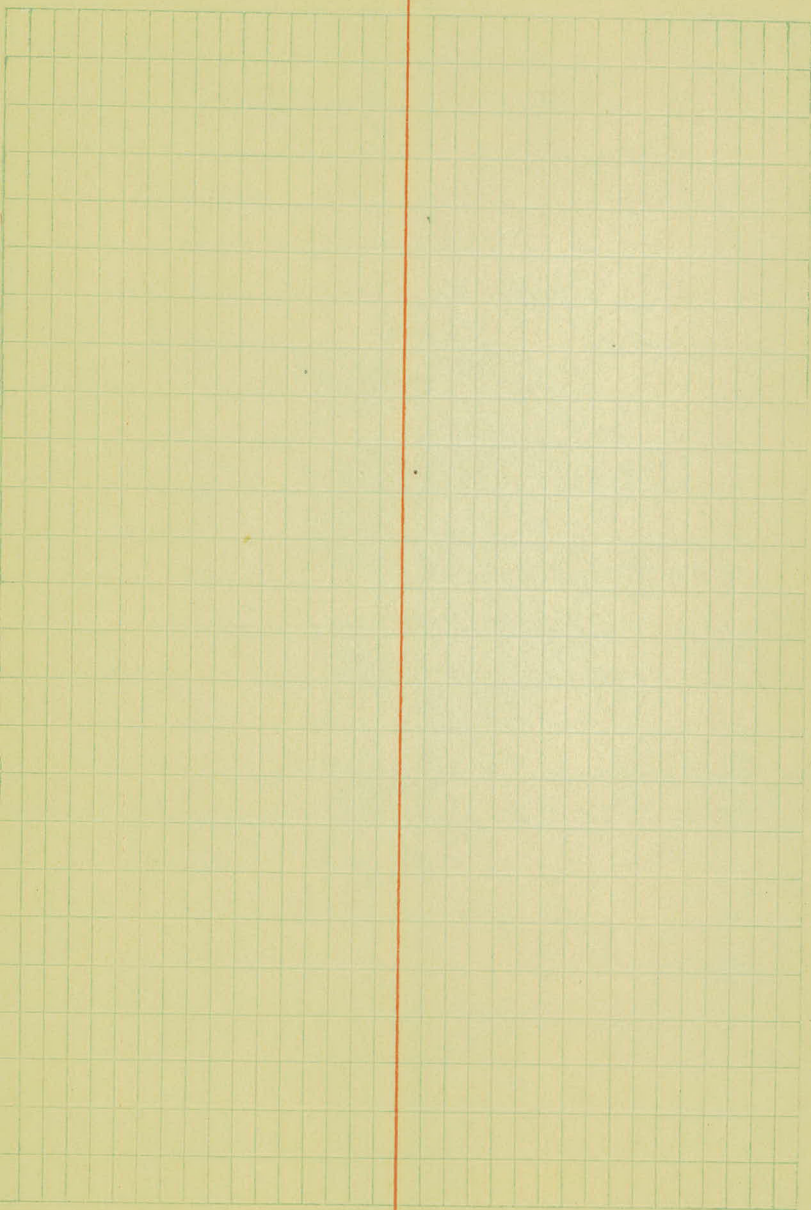

Original X sections of Borrow pit
Left of Sta. 63+00 to Sta. 64+17.

Sta.	+	H.I.	-	Elev.	
B.M.	2.45	304.79		302.34	
				Top of Pavement	
63			5.00	299.79	510
T.P.	5.00	307.37	2.45	302.34	
	+50		9.35	299.92	94
	+63		9.33	300.01	93 93 114 12
	+79		7.52	300.02	93 93 114 12
	+94		7.36	299.97	93 93 114 12
64					
	+11		7.25	300.09	92 92 113 12
	+17		7.26	300.08	93 92 113 12
T.P.	7.00	309.34	5.00	302.34	
T.P.	7.17	311.44	5.07	304.27	
T.P.	8.01	312.28	7.17	304.27	
T.P.	1.99	308.99	5.24	307.02	
B.M.			6.65	302.34	

Minus and plus from Top of pavement
4 1/2" left of C of Lexington Ave.

S.P. in Tree No. 57, 63 + 74

Left

12/15.4 25/18.6 50/29 70/46 150/61 200/69
-0.7 -1.6 -2.9 -4.4 -7.4 -1.9

14/19.6 17/22 21/26 25/30 52/39 70/47 100/52 200/69
-0.2 -1.4 -2.6 -3.1 -3.7 -4.5 -5.2 -6.9

50734 31144 15 312.28

15/20 19/27 24/31 30/37 52/47 86/51 114/67 135/73 142/80 200 8.9
-0.3 -1.4 -2.8 -4.1 -5.2 -6.3 -7.6 -8.8 -9.7 -3.9

179/82 173/80 200/81
797 763 763

20/26 17/25 21/30 27/35 52/44 81/45 91/49 101/52 104/56 150 9/5.1
-0.3 -1.5 -2.8 -4.2 -5.4 -6.7 -7.9 -9.1 -10.4 -3.1

179/82 173/80 200/81
797 763 763

20/26 19/26 21/30 27/35 52/44 81/45 91/49 101/52 104/56 150 9/5.1
-0.3 -1.3 -2.6 -4.1 -5.4 -6.7 -7.9 -9.1 -10.4 -3.1

179/82 173/80 200/81
797 763 763

20/26 19/26 21/30 27/35 52/44 81/45 91/49 101/52 104/56 150 9/5.1
-0.3 -1.3 -2.6 -4.1 -5.4 -6.7 -7.9 -9.1 -10.4 -3.1


179/82 173/80 200/81
797 763 763

20/26 19/26 21/30 27/35 52/44 81/45 91/49 101/52 104/56 150 9/5.1
-0.3 -1.3 -2.6 -4.1 -5.4 -6.7 -7.9 -9.1 -10.4 -3.1


179/82 173/80 200/81
797 763 763

Pass Line 4 1/2" Left of C

S.P. in Tree No. 57, 63 + 74

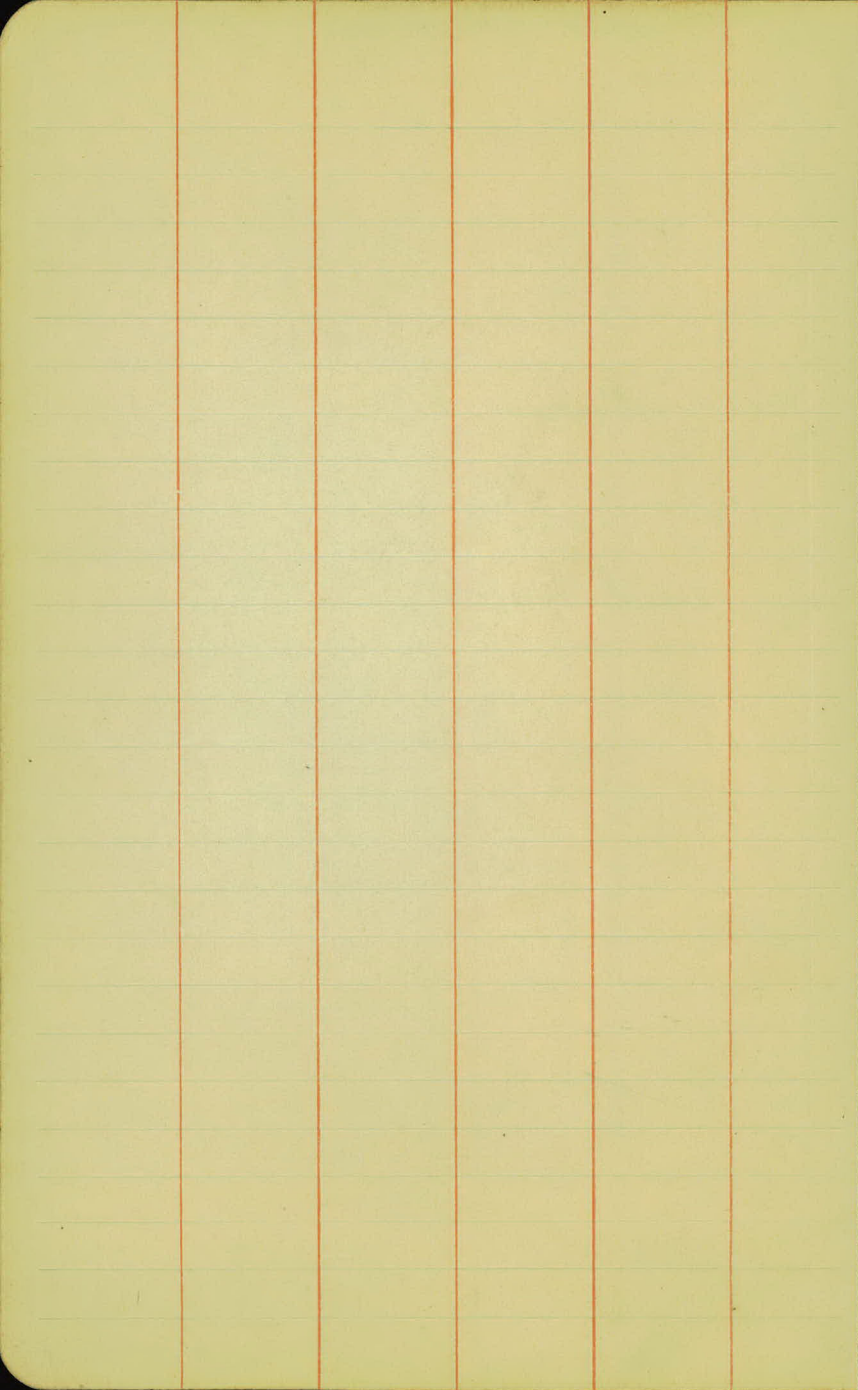

Location of Barrow Pit North
of Como Lake.


Cap in T.P. 

N 45° - 20' W

W. Montford St.

← 80' →

Lexington Ave.

Cap in E. Cap. 0700 

Original X. Sections of
Borrow Pit North of Cemo Lake.

Sta.	+	H.I.	-	Elev.	Grade Req.
P.M.	1.29	201.29		200.00	Assumed
0+34			2.00	198.70	2.6
0+46			6.00	195.29	6.0
0+57			1.10	200.09	1.1
T.P.	5.97	204.41	2.85	198.44	
0+80			2.60	201.81	2.6
1+00			1.80	202.01	1.8
T.P.	9.04	207.48	5.97	198.44	
1+25			2.70	204.58	2.7
1+50			2.70	204.78	2.7
1+87			1.60	205.88	1.4
T.P.	6.40	211.47	2.57	205.07	
2+00			7.80	203.69	7.8
2+18			8.10	203.39	8.1 14.9
	211.47 0.14 211.33 8.91 202.42				
2+41			1.00	203.49	8.0 16.8

Left

Sph. in 8" sap at 0+00.

50/2.3 77/10.6 80/2.8 90/10.7 127/12.2 132/13.0 154/15.5 200/16.0 215/12.3
-4.7 -8.0 -6.2 -8.1 -9.4 -10.4 -12.7 -13.4 -15.7

50/8.4 72/10.7 77/8.8 118/12.0 130/11.7 140/15.4 151/11.7 175/9.0 182/11.0 173/17.0
-2.4 -4.7 -2.8 -6.0 -5.7 -7.4 -5.7 -3.0 -5.0 -11.0

50/16.7 94/10.8 100/8.5 120/10.8 140/10.1 168/16.1
-5.6 -9.7 -7.4 -9.7 -9.8 -15.0

28/5.1 50/7.3 71/11.9 115/12.2 124/7.0 139/5.1
-2.5 -4.7 -9.3 -9.4 -11.4 -19.4

27/3.8 50/5.7 77/8.2 101/10.1 105/10.4 113/12.6
-2.0 -3.9 -6.4 -8.3 -8.8 -16.8

Base line

25/4.6 50/6.9 69/8.0 91/8.2 99/15.4
-1.7 -4.0 -5.1 -5.4 -12.7

26/3.3 50/4.8 50/5.3 59/4.4 78/4.8 85/11.7
-0.4 -2.1 -2.6 -1.7 -2.1 -9.0

12/1.9 17/3.2 50/4.0 63/3.0 67/1.5 93/0.8 100/6.5
-0.3 -1.4 -1.4 -1.4 +0.1 +0.8 -6.9

25/7.0 50/6.6 60/6.3 65/5.0 72/5.2 83/3.9 71/5.8 79/8.1 102/1.8 120/2.6
+0.8 +1.2 +1.5 +2.8 +2.9 +4.0 +4.0 +4.7 +6.0 +1.2
220.00 = 115.

24/7.3 30/6.3 55/5.9 67/4.0 60/4.7 94/3.9 100/1.5 10/1.8 100/1.1 100/1.69 120/2.0
+0.8 +1.8 +2.2 +3.9 +3.4 +4.2 +6.5 +8.1 +5.8 +0.0 +4.9
211/2.5
+2.6

35/1.4 38/6.6 50/5.5 55/4.0 85/3.3 71/1.4 100/6.7 10/1.9 105/2.9 10/7.5 100/6.7
+0.4 +1.4 +2.5 +4.0 +4.7 +6.4 +7.3 +8.1 +9.1 +9.5 +10.0
28/7.4
+9.4

Sta.	+	H.I.	-	Elev.	Conto. Pt.
		211.79			
2768			0.2	203.27	0.2 170
3400			0.5	202.99	0.5 173
3750			10.8	200.49	10.8 194
3750			11.2	200.27	11.2 200
T.P.	0.24	211.61	0.14	211.35	
T.P.	1.67	206.00	7.22	204.53	
R.M.			6.00	206.00	206.00

Left

22020 = 11.1


$\frac{7}{10.2}$ $\frac{20}{10.9}$ $\frac{33}{13.5}$ $\frac{50}{13.2}$ $\frac{60}{14.3}$ $\frac{70}{16.1}$ $\frac{100}{19.2}$ $\frac{117}{18.4}$ $\frac{100}{16.7}$ $\frac{210}{10.8}$
 $\frac{210}{13.0}$ $\frac{220}{11.1}$

$\frac{50}{12.4}$ $\frac{50}{15.4}$ $\frac{50}{10.2}$ $\frac{88}{16.7}$ $\frac{100}{18.3}$ $\frac{124}{17.3}$ $\frac{124}{10.8}$ $\frac{170}{14.9}$ $\frac{200}{12.4}$ $\frac{235}{11.4}$

$\frac{7}{12.1}$ $\frac{20}{14.8}$ $\frac{50}{19.2}$ $\frac{92}{10.9}$ $\frac{100}{11.9}$ $\frac{170}{13.7}$ $\frac{181}{15.5}$ $\frac{200}{15.6}$ $\frac{221}{16.8}$ $\frac{255}{17.3}$
 $\frac{234}{14.7}$ $\frac{241}{14.7}$


$\frac{5}{11.7}$ $\frac{20}{14.2}$ $\frac{50}{17.2}$ $\frac{59}{18.4}$ $\frac{75}{16.0}$ $\frac{71}{17.2}$ $\frac{77}{12.4}$ $\frac{141}{13.3}$ $\frac{127}{14.3}$ $\frac{120}{15.1}$ $\frac{120}{13.0}$
 $\frac{214}{11.5}$ $\frac{235}{11.4}$ $\frac{241}{11.0}$

Salt in 3" Gal. at Sta 0+00.

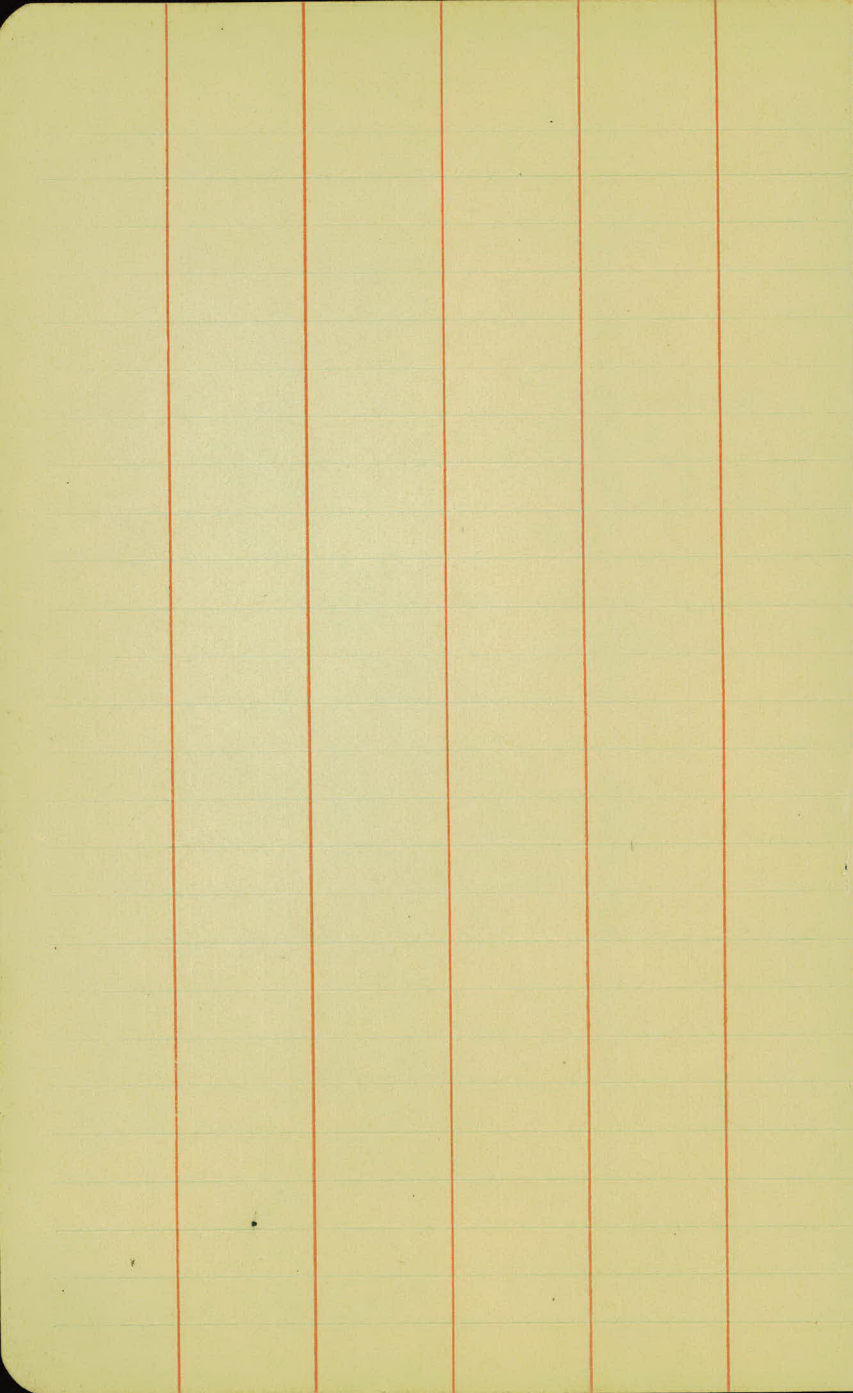

Sketch showing location of borrow pit
North of N.P. R.Y.

North rail of N.P. R.Y. tracks = Base line
Sta. 102+48⁰ = 0+00 thence West.

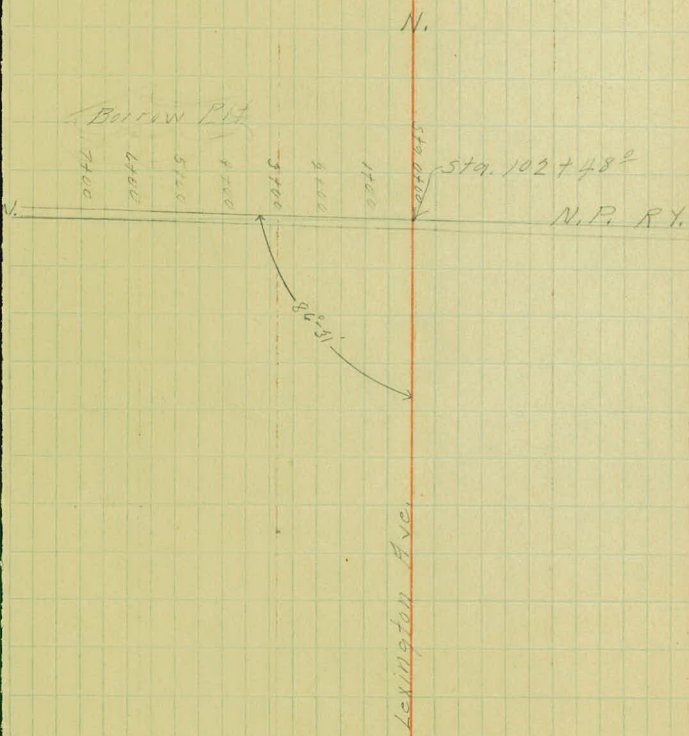

Original X Sec. of barrow Pit North of N.P.R.Y.

Sta	H.T.	Top of Rail Elev.	Grade Prof.
B.M.	0.35	268.93	268.58
T.P.	0.67	266.39	2.21 257.72
3+50			5.20 261.19 5.2 10.7
+91			4.86 261.53 4.8 10.4
4+00			4.80 261.59 4.8 10.3
+04	0.35	268.93	4.76 261.63 4.8 10.3
+57	0.67	266.39	4.19 262.29 4.1 9.4
+84	0.35	268.93	3.93 262.44 3.9 14.8
5+00			3.96 262.63 3.8 14.7
+24			3.50 262.89 3.5 14.4
+68			3.14 263.35 3.0 13.9
6+00			2.68 263.71 2.7 13.4
+50			2.26 264.19 2.2 16.7
7+00			1.80 264.59 1.8 16.3
B.M.			1.17 278.51

Sum in Tol. Fele 100/15 Sta 104+100

Right

271.87

4/57.6	7/77.4	28/21.6	35/2.2	37/2.7	48/2.3
-0.4	-2.2	-1.4	+3.0	+5.0	+8.4

271.88

3/4.8	7/1.4	24/6.1	32/2.5	36/2.5	48/1.9
+0.1	-1.5	-1.2	+2.4	+2.7	+8.5

271.88

9/5.2	7/6.4	11/6.2	12/6.5	25/2.1	31/2.5	40/1.7
-1.4	-1.4	-1.4	+1.3	+8.2	+7.8	+8.6

271.88

3/5.3	7/6.0	10/5.5		23/2.7	34/2.1	46/1.5
-0.5	-1.2	-0.7		+7.4	+8.2	+8.5

271.88

Base

4/5.3	6/6.1	10/5.7	15/2.0	18/1.1	25/1.9	35/1.9	47/1.2
-1.2	-2.0	-1.6	+2.1	+3.0	+7.7	+7.7	+8.4

277.28

4/4.9	7/5.4	12/4.4	15/6.5	20/6.6	44/6.0	46/5.5
-1.0	-1.5	-0.5	+2.4	+2.2	+2.8	+9.3

277.28

3/7.8	5/5.6	11/4.9	17/10.6	20/8.6	28/6.0	28/6.3	40/5.2	46/4.9
-1.0	-1.8	-1.1	+4.7	+6.1	+8.7	+8.4	+8.9	+9.8

277.28

3/4.4	6/5.5	9/4.7	14/1.8	14/7.4	22/4.2	28/4.9	46/4.0
-0.7	-1.8	-1.2	+1.7	+5.0	+10.2	+7.5	+10.4

277.28

6/2.1	6/5.0	9/4.5	14/1.4	16/6.1	24/1.5	28/1.2	37/1.6	46/1.6
-1.1	-2.0	-1.3	+1.6	+7.8	+12.6	+12.1	+12.3	+12.3


5/3.7	6/2.7	11/3.0	20/4.8	25/0.2	27/4.3	28/1.5	46/1.5
-1.0	-2.0	-0.3	+8.8	+12.8	+12.3	+12.3	+12.3

6/3.2	7/3.9	10/3.6	18/9.8	25/4.4	30/4.1	32/3.6	41/3.7	46/3.1
-1.0	-1.7	-1.4	+6.7	+12.3	+12.4	+13.1	+13.0	+13.4

280.85

6/2.7	12/3.6	10/3.0	19/7.8	20/3.1	29/3.4	20/2.4	22/2.7	44/1.2
-0.9	-1.8	-1.2	+8.5	+13.2	+12.7	+13.7	+13.4	+13.7

Mail in P.P. 46 Sta 97+00

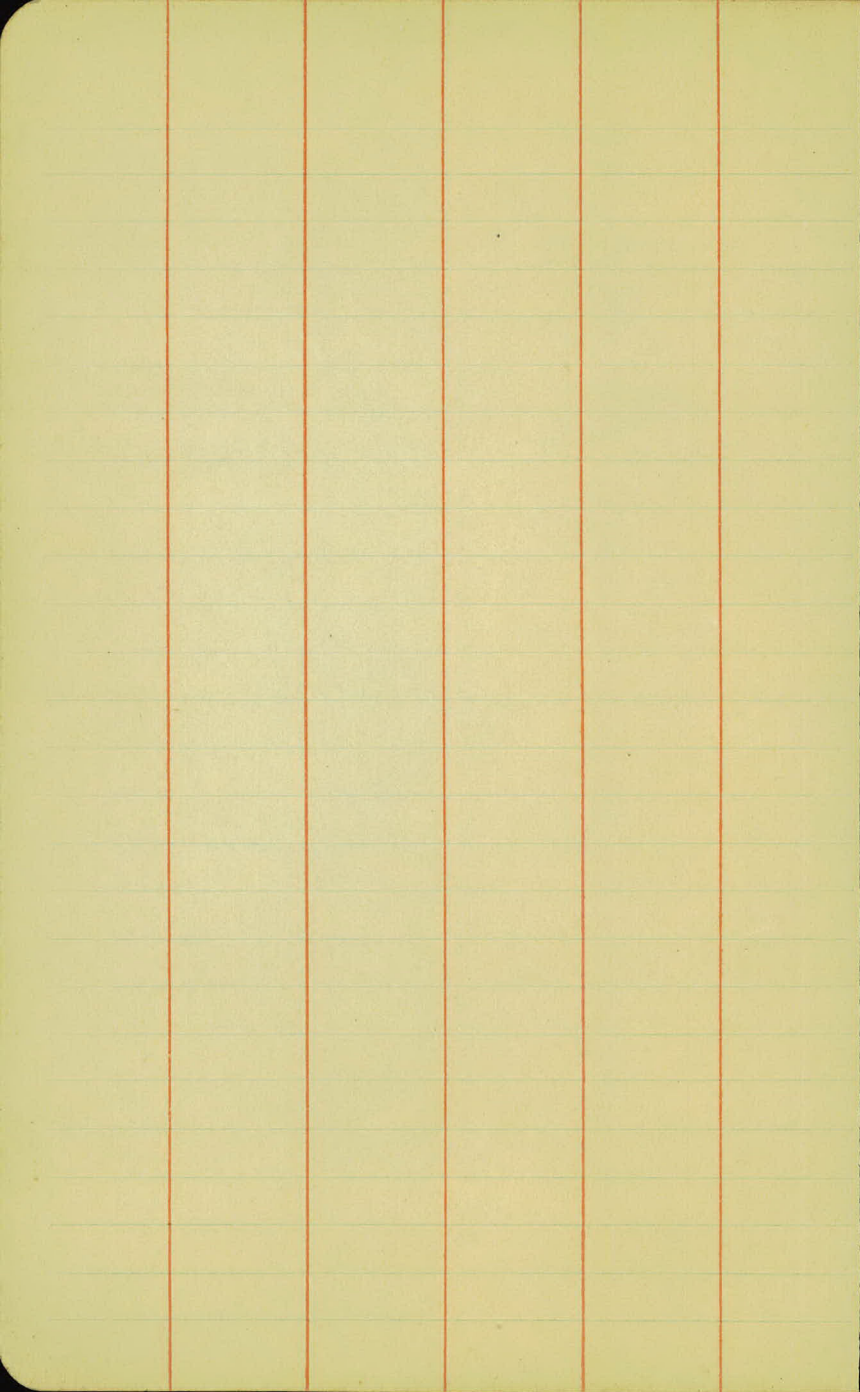

Sta.	+	H.T.	-	Elev.	
B.M.	2.52	302.52		300.00	
T.P.	7.32	299.32	10.52	292.00	
T.P.	11.49	310.67	0.14	299.18	
B.M. ✓			1.74	308.93	306.93
T.P.	5.43	307.15	8.75	301.92	
B.M.	5.10	309.38	2.87	304.23	304.21
T.P.	6.52	314.14	1.74	307.64	
B.M. ✓			4.67	309.19	
T.P.	2.24	314.48	1.94	312.22	
B.M.	2.84	310.35	6.77	307.51	307.44
T.P.	3.10	304.20	9.25	301.10	
B.M. ✓			1.76	302.31	302.23
B.M.			7.35	296.85	
T.P.	0.41	296.29	8.32	295.80	
T.P.	4.62	296.32	10.59	285.90	
B.M.			0.19	296.10	296.00
T.P.	4.74	274.73	6.55	287.77	
T.P.	0.60	287.15	8.20	286.45	
B.M. ✓			6.62	286.45	
T.P.	6.24	277.17	9.95	277.10	
T.P.	6.31	267.08	10.57	266.77	
T.P.	2.35	257.99	11.44	255.64	
B.M.			2.90	255.09	
T.P.	11.84	265.97	3.86	254.13	
T.P.	9.64	274.30	1.31	264.66	

Spl. in Tel. pole S.E. Cor. Lex. & Larp.

Spl. in Tree 36' H. Sta. 17+12.

Spl. in Tree 115' H. Sta. 28+06.

On Top of Concrete Wall N. Cor. H. Sta. 39+15.

Top of lower school house step S. end H. Sta. 52+00

Spl. in T. H. Sta. 63+74

Spl. in 10" stem 30' H. Sta. 63+30 (Sec. 5/17/21)

Spl. in T. 36' H. Sta. 78+15

Spl. in T. 30' H. Sta. 86+80

Spl. in Tree 60' H. Sta. 97+25.

174.30

B.M.	✓			5.72	268.52	268.51
T.P.	11.95	276.03		0.24	274.06	
T.P.	11.52	277.33		0.22	283.31	
T.P.	5.87	300.85		2.35	294.76	
B.M.				3.20	297.65	297.64
T.P.	0.47	290.41		10.91	289.74	
T.P.	0.80	277.52		11.69	278.92	
T.P.	0.30	249.51		10.31	269.21	
B.M.	0.65	259.29		10.87	257.64	
T.P.	3.38	252.28		10.37	248.90	
B.M.	✓			2.57	247.71	
T.P.	4.92	251.72		5.28	247.00	
B.M.	2.10	251.74		2.28	247.64	247.64
T.P.	7.77	255.07		4.44	247.30	
B.M.	✓			0.42	254.65	
T.P.	9.18	263.34		0.87	257.18	
T.P.	10.55	272.05		1.84	261.50	
T.P.	11.37	273.10		0.34	271.71	
T.P.	2.45	289.81		1.74	281.36	
B.M.				1.95	287.84	287.97
T.P.	10.61	294.10		2.32	287.47	
T.P.	8.94	306.62		0.42	297.67	
B.M.	1.84	305.72		2.54	304.07	
T.P.	0.81	277.27		9.44	276.48	

Spt in T. P²⁰⁰ 12 Sta. 104+00.

Spt in Tree 50' Lt. Sta. 112+50

Spt in Tel Palo 30' RA Sta. 138+00

Spt in Tree 60' Lt. Sta. 132+49.

Spt in Tree 60' Lt. Sta. 143+00.

On S.E. Cor of side Walk 15' Lt. Sta. 152+98.

Spt in 12" Elm 55' Lt. Sta. 164+93.


Spt in 30" Poplar 40' Lt. Sta. 178+95


Sta.	+	M.I.	-	Elev.	Plan Elev.
		297.29			
T.P.	0.65	286.39	11.55	285.74	
B.M.			7.73	278.64	
T.P.	9.49	278.18	7.70	278.69	
T.P.	9.70	294.99	2.91	285.27	
B.M.			1.79	293.18	
T.P.	9.30	303.19	1.08	293.89	
T.P.	9.12	311.13	1.18	302.01	
B.M.			5.05	306.08	306.15

Spk. in Tel. Pole 30' B. Sta. 189+65.

Spk. in 12" Box Elder 20' B. Sta. 204+10

Spk. in 18" Oak N.E. Cor. 45' B. Sta. 216+00.

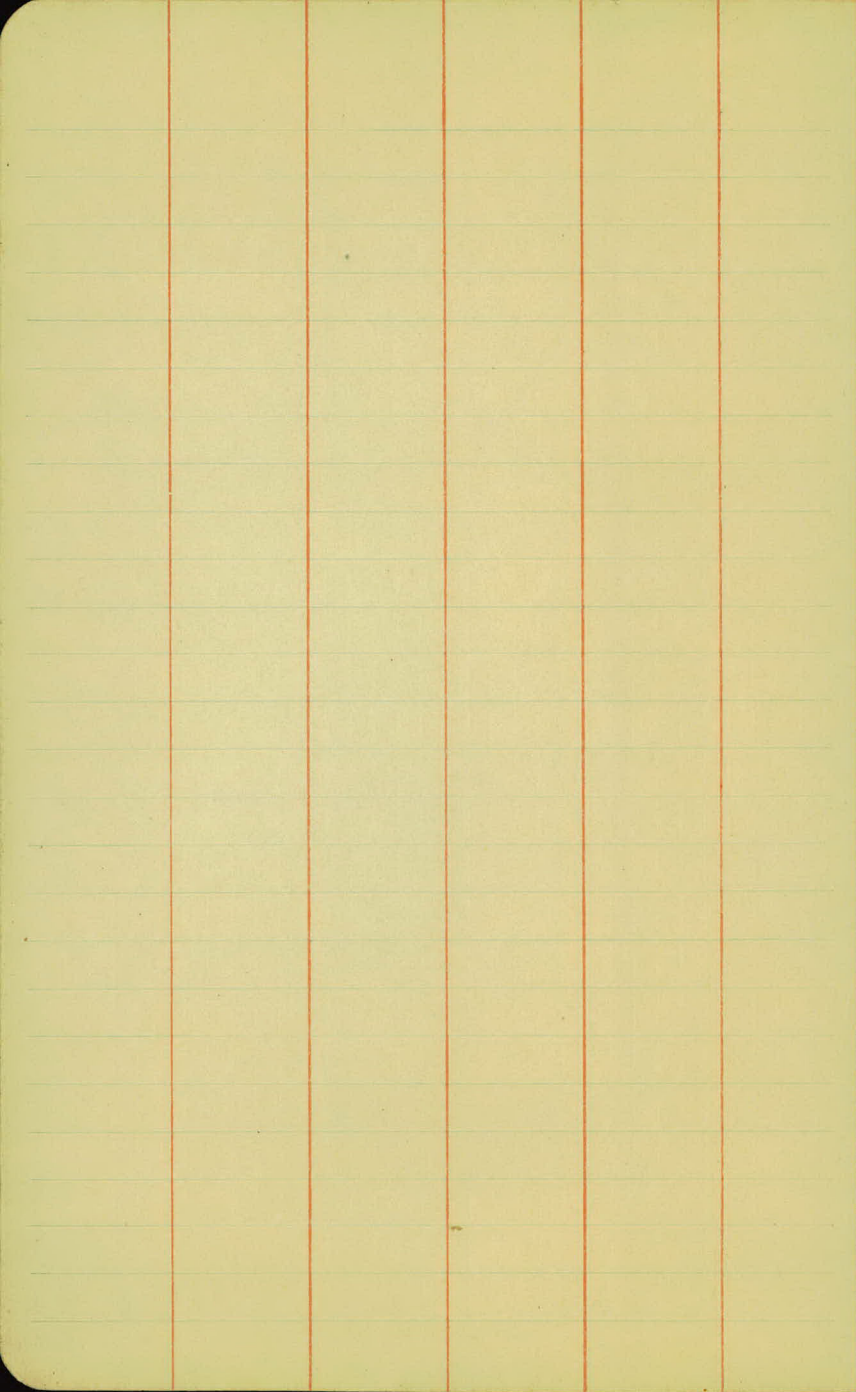


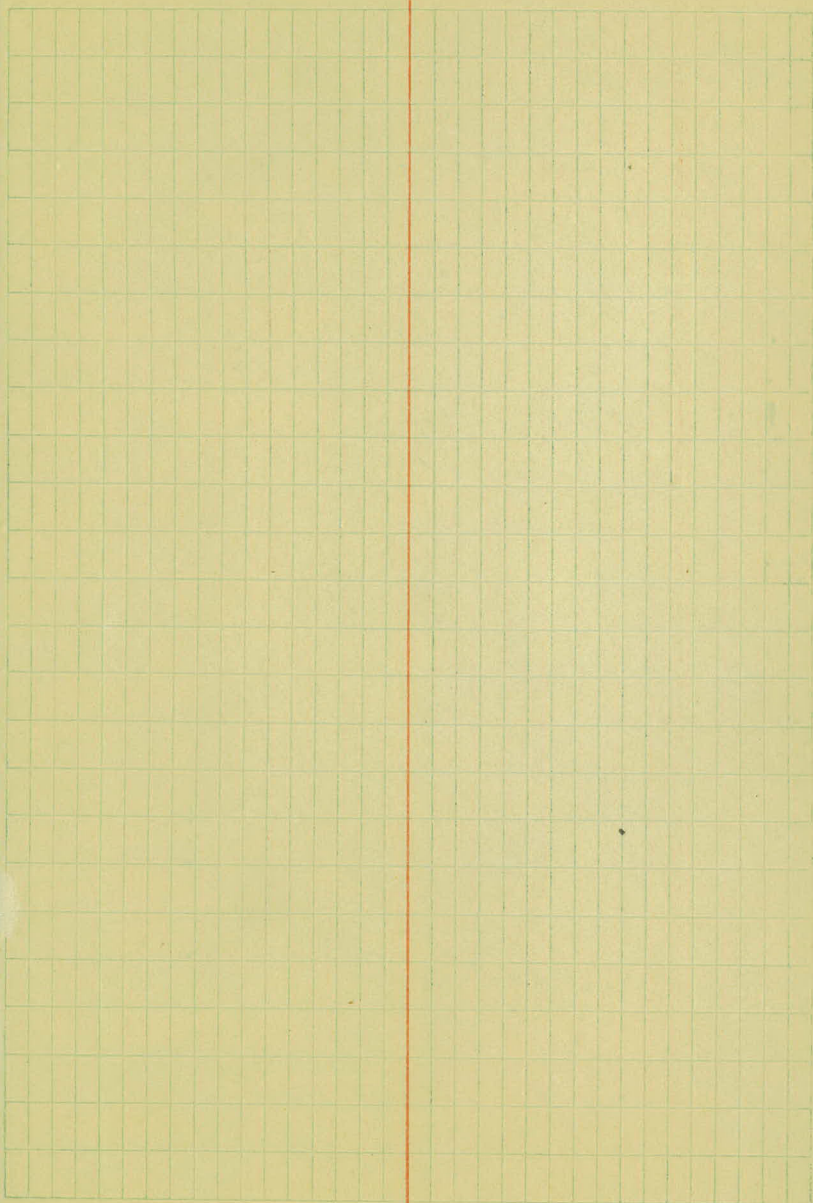


Sta.	Point.	Lt.	Rt.
52+66 ⁴	P.I.	0°-59'	Sec. Cor.
49+28 ⁰	P.O.T.		N.00°39'W.
+37 ¹⁵			
26+57 ⁵⁵	P.I.	0°-59'	1/4 Cor.
15+83 ⁷	P.O.T.		N.00°00'E.
0+00	P.O.T.	Sec. Cor.	




Sight on top of Ref. Silo.

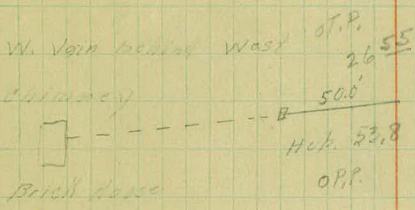

Nail & Cap in 15" T. Exact 100' W.



Nail & Cap in 15" T.

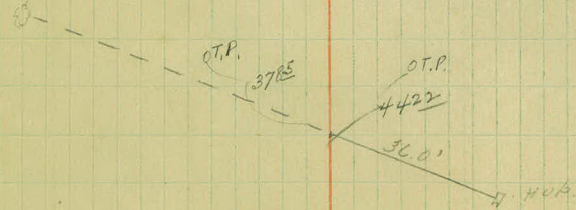

Sta. Point. L. H.

¹⁰⁰
112+49^s P.O.T.

112+20.8 P.O.T. & Co. rd 'C'

111+80[?] P.O.T. N.0°09'W.

⁷⁵
104+73^s P.I. sec. Co. rd 0°-12'

-12

¹⁰⁰
83+04^s P.O.T.

78+72^s P.O.T. 1/4 Co. rd N.1°18'W.

¹¹⁵
66+12^s P.O.T.

Nail & Cap in 12" Tree @ 32.38' 40.0' Hub

E. Co. Road

"G" 502.54'

Co. Rd. C Sta. 165772.4

90° 10-44'

Hub 45.0

Sight on Top of Side

T.P. @ 28° 03'

45.0

5421

Hub

Porch - SW. cor. House

Sight on East of Red Barn

40.0

Hub

P.P. @ 30° 12' 45" T.P.

45.0'

Hub

Sight on Nail & Cap in Board fence

Sta. Point. W. 87

N. 23° 39' W.

50¹⁵
133+27¹⁵ ✓ P.T.

10° Curve Rt.

$\Delta = 16^\circ - 27'$

Tang = 52.73 ✓

132+68² P.I.

14° - 27'

Length = 107.5 ✓

31785² ✓ P.C.

N. 40° 06' W.

129+25⁶⁴ P.T.

16° - Curve Lt.

$\Delta = 39^\circ - 10'$

Tang = 127.83 ✓

120+68² P.I.

39° - 10'


Length = 144.79 ✓

126+80⁵⁹ P.C. ✓

111 185 32

131 0-44

131 0-44 Nail and cap in 12" Oak.



+49 8°-19'

120+50

137 1°-30'

150 5°-30'


165 9°-30'

70 14°-30'

119 17°-30'


125 19°-30'

Q Sight on top of Silo.




Sta.	Point	Lt.	Rt.	
				N. 30° 00' E
152+23 ⁰⁰	P.T.			12° - Curve Rt. Δ = 23° - 41'
151+26 ³	P.I.		23° - 41'	Tang. = 100. ³⁰ / _{v.} Length. 197 ³⁰ / _{v.}
150+26 ⁵	P.C.			N. 6° 19' E.
144+10 ⁶⁴	P.T.			
143+29 ²	P.I.		29° - 58'	18° - Curve Rt. Δ = 27° - 58' Tang. = 85 ⁵⁴ / _{v.} Length. 146 ⁴⁸ / _{v.}
142+44 ¹⁶	P.C.			N. 23° 39' W.

150726⁹
 750 1°-24 1/2
 151 4°-25 1/2
 750 7°-28 1/2
 152 10°-24 1/2
 723⁸⁶ 11°-50 1/2

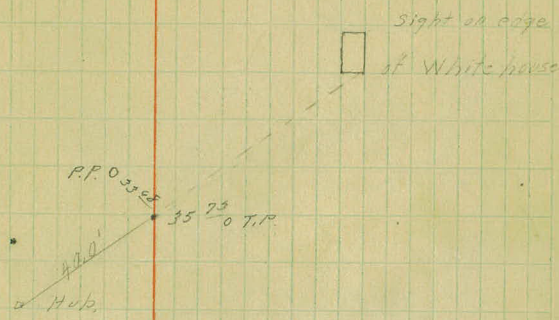

142124⁰
 700 2°-31 1/2
 151 5°-21 1/2
 750 9°-30 1/2
 152 12°-01 1/2
 740 14°-57



79.16
40.79
38.37

Sta. Point Lt. Pt.

182+31¹ P.O.T.

175+69⁸ P.O.T.

N.00°45'W.

163+37⁴ P.T.

20° Curve Lt.

$\Delta = 30^\circ - 45'$

Tang. = 79¹⁵ V

142+44⁵⁸ P.I. 30°-45'

Length = 153⁷⁵ V


141+85⁷⁴ P.C.

N.30°00'E.

Sight on Cross
on Nazareth Hall.



Sight on red Brick
chimney on white
house.



79.18
~~75.22~~
 38.37


101 + 89.7

102 - 1° - 35'

750 - 6° - 25'

103 - 11° - 25'

437 - 15° - 22'



Sight on Top of
S.E. S. 10



153.70
 40.70
 11.96
 79.16
 40.79
 36.59

Sta.	Point.	Lt.	Rt.
------	--------	-----	-----

215+73 ⁴⁵	End. Pavement.		
----------------------	----------------	--	--

215+77 ⁴⁵	P.I.	End of Proj.	# 24-01
----------------------	------	--------------	---------

212+00	P.O.T.		
--------	--------	--	--

N.00°45'W

187+37 ¹⁵	P.O.T.	Mont 1/4 Cor.	
----------------------	--------	---------------	--

Guy Pole. \circ 28.75' \circ 56.55' \circ 13" C.A.R.

50.0' \circ HUB.

Sight on S. peak of Barn.



T.P. \circ 41.32'

\circ T.P. \circ 38.53' \circ HUB.

Sight on Cross

on tower with dial



200'

Sta.	+	H.I.	-	Elev.	check level Elev.
B.M.	3.17	290.49		287.32	
B.M.			2.52	287.97	287.84
B.M.	3.54	307.81		304.27	304.14
B.M.			3.60	304.21	304.08
B.M.	4.49	284.95		280.46	280.35
B.M.			6.18	278.77	278.64

Sph. in 12" Birch 22' H. Sta. 167+93


Sph. in 12" Elm 55' H. Sta. 167+93 (Set 4/23/24)

Sph. in 20' Poplar 20' H. Sta. 178+95

Sph. in 20" Poplar 90' H. Sta. 178+95 (Set 4/23/24)


Sph. in 14" Oak Stump 25' H. Sta. 189+67

Sph. in T.P. 30' H. Sta. 189+65 (Set 4/23/24)

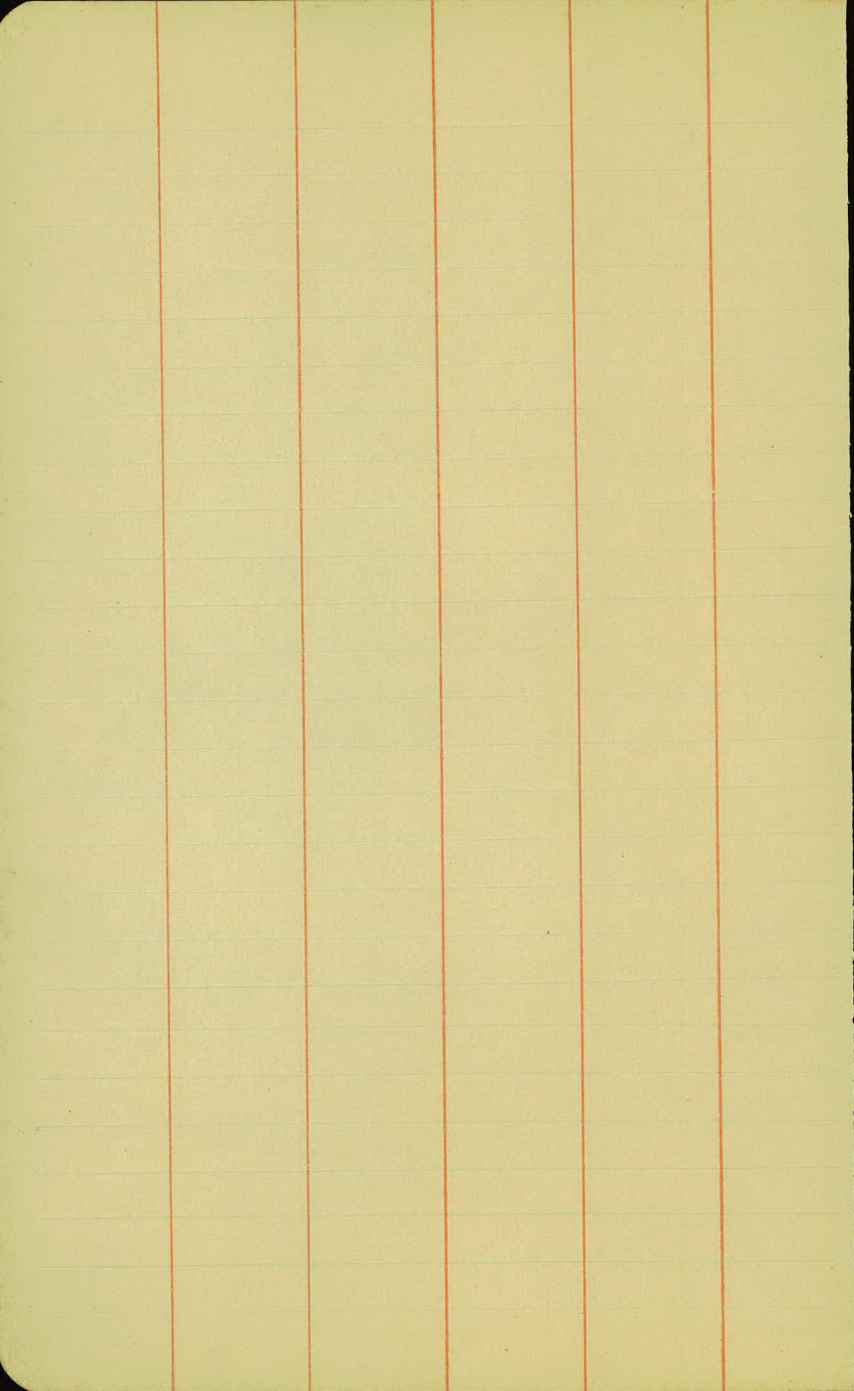

DIETZGEN'S RAILROAD CURVE AND REDUCTION TABLES

Copyright, 1914, by Eugene Dietzgen Co., New York City



CURVE FORMULAS

Radius= $R = \frac{50}{\sin. D/2}$ (1) Degree of Curve= D and $\sin. \frac{D}{2} = \frac{50}{R}$ (2)

Tangent= $T = R \tan \frac{\Delta}{2}$ (3) Length of Curve= $L = 100 \frac{\Delta}{D}$ (4)

Middle ordinate= $M = R(1 - \cos. \frac{\Delta}{2})$ (5) $= R \text{vers} \frac{\Delta}{2}$ (6)

External= $E = T \tan \frac{\Delta}{4}$ (7) $= R \div \cos. \frac{\Delta}{2} - R$ (8) $= R \text{exsec} \frac{\Delta}{2}$ (9)

Long Chord= $C = 2 R \sin. \frac{\Delta}{2}$ (10) $\Delta =$ Central Angle

EXPLANATION AND USE OF TABLES

Stations.—Given P. I.=Sta. 161+60.35 to find Sta. of P. C. and P. T. $\Delta=62^\circ 10'$ $D=8^\circ 20'$. From Table IV for 1° curve $T=3454.1$ and $\div 8\frac{1}{2}=414.49$ ft. From Table V correction= $-.36$ or $T=414.85$ ft. P. C.=Sta. P.I.— $T=157+45.50$. Also from (4) $L=746.00$ and P. T.=Sta. P. C. + $L=164+91.50$.

Offsets.—Tangent offsets vary (approximately) directly with D and with square of the distance. Thus tangent offset for Sta. 158 on above curve is 2.16 ft. found as follows. From Table III tangent offset for 100 ft.=7.27 ft. Distance= 158 —Sta. P. C.=54.50, hence offset= $7.27 (54.50 \div 100)^2=2.16$ ft. Also square of any distance divided by twice the radius equals (approximately) the distance from tangent to curve. Thus $(54.50)^2 \div (2 \times 688.26)=2.16$ ft.

Deflections.—Deflection angle= $\frac{1}{2} D$ for 100 ft., $\frac{1}{4} D$ for 50 ft., etc. For c ft.=(in minutes) $.3 \times C \times D^2$ or=defl. for 1 ft. from Table III $\times C$. For Sta. 158 of above curve= $.3 \times 54.5 \times 8\frac{1}{2}=136.2'$ or $2^\circ 16.2'$, or= $2.50 \times 54.5=136.2'$ from Table III. For Sta. 159 deflection angle= $2^\circ 16.2' + 8^\circ 20' \div 2=6^\circ 26.2'$, etc.

Externals.—May be found in similar manner to tangents. Thus E for curve above is 91.37. For from Table IV for 1° curve $E=960.6$ for $8^\circ 20'=960.6 \div 8\frac{1}{2}=91.27$ and from Table V correction= $-.10$ or $E=91.37$ ft. Or suppose $\Delta=32^\circ$ and E is measured and found to be 42 ft. What is D ? From Table IV $E=230.9$ and $\div 42=5.5$ or $D=5^\circ 30'$.

TABLE I.—MINUTES IN DECIMALS OF A DEGREE.

1'	.0167	11'	.1833	21'	.3500	31'	.5167	41'	.6833	51'	.8500
2	.0333	12	.2000	22	.3667	32	.5333	42	.7000	52	.8667
3	.0500	13	.2167	23	.3833	33	.5500	43	.7167	53	.8833
4	.0667	14	.2333	24	.4000	34	.5667	44	.7333	54	.9000
5	.0833	15	.2500	25	.4167	35	.5833	45	.7500	55	.9167
6	.1000	16	.2667	26	.4333	36	.6000	46	.7667	56	.9333
7	.1167	17	.2833	27	.4500	37	.6167	47	.7833	57	.9500
8	.1333	18	.3000	28	.4667	38	.6333	48	.8000	58	.9667
9	.1500	19	.3167	29	.4833	39	.6500	49	.8167	59	.9833
10	.1667	20	.3333	30	.5000	40	.6667	50	.8333	60	1.0000

TABLE II.—INCHES IN DECIMALS OF A FOOT.

1-16	3-32	¼	3-16	¼	5-16	¾	½	⅝	¾	⅞
.0052	.0078	.0104	.0156	.0208	.0260	.0313	.0417	.0521	.0625	.0729
1	2	3	4	5	6	7	8	9	10	11
.0833	.1667	.2500	.3333	.4167	.5000	.5833	.6667	.7500	.8333	.9167

TABLE III.—RADII, ORDINATES AND DEFLECTIONS.

Deg.	Radius	Mid. Ord.	Tan. Offset	Def. for 1 Foot	Deg.	Radius	Mid. Ord.	Tan. Offset	Def. for 1 Foot
0° 10'	34377.5	.036	.145	0.05'	7°	819.02	1.528	6.195	2.10'
20'	17188.8	.073	.291	0.10	20'	781.84	1.600	6.395	2.20
30	11459.2	.109	.436	0.15	30	764.49	1.637	6.540	2.25
40	8594.42	.145	.582	0.20	40	747.89	1.673	6.685	2.30
50	6875.55	.182	.727	0.25					
1	5729.65	.218	.873	0.30	8	716.78	1.746	6.976	2.40
10	4911.15	.255	1.018	0.35	20	688.16	1.819	7.266	2.50
20	4297.28	.291	1.164	0.40	30	674.69	1.855	7.411	2.55
30	3819.83	.327	1.309	0.45	40	661.74	1.892	7.556	2.60
40	3437.87	.364	1.454	0.50					
50	3125.36	.400	1.600	0.55	9	637.28	1.965	7.846	2.70
					20	614.56	2.037	8.136	2.80
					30	603.80	2.074	8.281	2.85
					40	593.42	2.110	8.426	2.90
2	2864.93	.436	1.745	0.60					
10	2644.58	.473	1.891	0.65	10	573.69	2.183	8.716	3.00
20	2455.70	.509	2.036	0.70	30	546.44	2.292	9.150	3.15
30	2292.01	.545	2.181	0.75	11	521.67	2.402	9.585	3.30
40	2148.79	.582	2.327	0.80	30	499.06	2.511	10.02	3.45
50	2022.41	.618	2.472	0.85	12	478.34	2.620	10.45	3.60
					30	459.28	2.730	10.89	3.75
3	1910.08	.655	2.618	0.90	13	441.68	2.839	11.32	3.90
10	1809.57	.691	2.763	0.95	30	425.40	2.949	11.75	4.05
20	1719.12	.727	2.908	1.00	14	410.28	3.058	12.18	4.20
30	1637.28	.764	3.054	1.05	30	396.20	3.168	12.62	4.35
40	1562.88	.800	3.199	1.10					
50	1494.95	.836	3.345	1.15	15	383.07	3.277	13.05	4.50
					30	370.78	3.387	13.49	4.65
4	1432.69	.873	3.490	1.20	16	359.27	3.496	13.92	4.80
10	1375.40	.909	3.635	1.25	30	348.45	3.606	14.35	4.95
20	1322.53	.945	3.718	1.30	17	338.27	3.716	14.78	5.10
30	1273.57	.982	3.926	1.35	18	319.62	3.935	15.64	5.40
40	1228.11	1.018	4.071	1.40	19	302.94	4.155	16.51	5.70
50	1185.78	1.055	4.217	1.45					
					20	287.94	4.374	17.37	6.00
5	1146.28	1.091	4.362	1.50	21	274.37	4.594	18.22	6.30
10	1109.33	1.127	4.507	1.55	22	262.04	4.814	19.08	6.60
20	1074.68	1.164	4.653	1.60	23	250.79	5.035	19.94	6.90
30	1042.14	1.200	4.798	1.65	24	240.49	5.255	20.79	7.20
40	1011.51	1.237	4.943	1.70					
50	982.64	1.273	5.088	1.75	25	231.01	5.476	21.64	7.50
					26	222.27	5.697	22.50	7.80
6	955.37	1.309	5.234	1.80	27	214.18	5.918	23.35	8.10
10	929.57	1.346	5.379	1.85	28	206.68	6.139	24.19	8.40
20	905.13	1.382	5.524	1.90	29	199.70	6.360	25.04	8.70
30	881.95	1.418	5.669	1.95	30	193.18	6.583	25.88	9.00
40	859.92	1.455	5.814	2.00					

Note. Chord Deflection=2 times tangent deflection.

TABLE IV.—TANGENTS AND EXTERNALS TO A 1° CURVE.

Central Angle	Tangent	External	Central Angle	Tangent	External	Central Angle	Tangent	External
1°	50.00	.22	11°	551.70	26.50	21°	1061.9	97.57
10'	58.34	.30	10'	560.11	27.31	10'	1070.6	99.16
20	66.67	.39	20	568.53	28.14	20	1079.2	100.75
30	75.01	.49	30	576.95	28.97	30	1087.8	102.35
40	83.34	.61	40	585.36	29.82	40	1096.4	103.97
50	91.68	.73	50	593.79	30.68	50	1105.1	105.60
2	100.01	.87	12	602.21	31.56	22	1113.7	107.24
10	108.35	1.02	10	610.64	32.45	10	1122.4	108.90
20	116.68	1.19	20	619.07	33.35	20	1131.0	110.57
30	125.02	1.36	30	627.50	34.26	30	1139.7	112.25
40	133.36	1.55	40	635.93	35.18	40	1148.4	113.95
50	141.70	1.75	50	644.37	36.12	50	1157.0	115.66
3	150.04	1.96	13	652.81	37.07	23	1165.7	117.38
10	158.38	2.19	10	661.25	38.03	10	1174.4	119.12
20	166.72	2.43	20	669.70	39.01	20	1183.1	120.87
30	175.06	2.67	30	678.15	39.99	30	1191.8	122.63
40	183.40	2.93	40	686.60	40.99	40	1200.5	124.41
50	191.74	3.21	50	695.06	42.00	50	1209.2	126.20
4	200.08	3.49	14	703.51	43.03	24	1217.9	128.00
10	208.43	3.79	10	711.97	44.07	10	1226.6	129.82
20	216.77	4.10	20	720.44	45.12	20	1235.3	131.65
30	225.12	4.42	30	728.90	46.18	30	1244.0	133.50
40	233.47	4.76	40	737.37	47.25	40	1252.8	135.35
50	241.81	5.10	50	745.85	48.34	50	1261.5	137.23
5	250.16	5.46	15	754.32	49.44	25	1270.2	139.11
10	258.51	5.83	10	762.80	50.55	10	1279.0	141.01
20	266.86	6.21	20	771.29	51.68	20	1287.7	142.93
30	275.21	6.61	30	779.77	52.89	30	1296.5	144.85
40	283.57	7.01	40	788.26	53.97	40	1305.3	146.79
50	291.92	7.43	50	796.75	55.13	50	1314.0	148.75
6	300.28	7.86	16	805.25	56.31	26	1322.8	150.71
10	308.64	8.31	10	813.75	57.50	10	1331.6	152.69
20	316.99	8.76	20	822.25	58.70	20	1340.4	154.69
30	325.35	9.23	30	830.76	59.91	30	1349.2	156.70
40	333.71	9.71	40	839.27	61.14	40	1358.0	158.72
50	342.08	10.20	50	847.78	62.38	50	1366.8	160.76
7	350.44	10.71	17	856.30	63.63	27	1375.6	162.81
10	358.81	11.22	10	864.82	64.90	10	1384.4	164.86
20	367.17	11.75	20	873.35	66.18	20	1393.2	166.95
30	375.54	12.29	30	881.88	67.47	30	1402.0	169.04
40	383.91	12.85	40	890.41	68.77	40	1410.9	171.15
50	392.28	13.41	50	898.95	70.09	50	1419.7	173.27
8	400.66	13.99	18	907.49	71.42	28	1428.6	175.41
10	409.03	14.58	10	916.03	72.76	10	1437.4	177.55
20	417.41	15.18	20	924.58	74.12	20	1446.3	179.72
30	425.79	15.80	30	933.13	75.49	30	1455.1	181.89
40	434.17	16.43	40	941.69	76.86	40	1464.0	184.08
50	442.55	17.07	50	950.25	78.26	50	1472.9	186.29
9	450.93	17.72	19	958.81	79.67	29	1481.8	188.51
10	459.32	18.38	10	967.38	81.09	10	1490.7	190.74
20	467.71	19.06	20	975.96	82.53	20	1499.6	192.99
30	476.10	19.75	30	984.53	83.97	30	1508.5	195.25
40	484.49	20.45	40	993.12	85.43	40	1517.4	197.53
50	492.88	21.16	50	1001.7	86.90	50	1526.3	199.82
10	501.28	21.89	20	1010.3	88.39	30	1535.3	202.12
10	509.68	22.62	10	1018.9	89.89	10	1544.2	204.44
20	518.08	23.38	20	1027.5	91.40	20	1553.1	206.77
30	526.48	24.14	30	1036.1	92.92	30	1562.1	209.12
40	534.89	24.91	40	1044.7	94.46	40	1571.0	211.48
50	543.29	25.70	50	1053.3	96.01	50	1580.0	213.86

TABLE IV.—TANGENTS AND EXTERNALS TO A 1° CURVE.

Central Angle	Tangent	External	Central Angle	Tangent	External	Central Angle	Tangent	External
31°	1589.0	216.3	41°	2142.2	387.4	51°	2732.9	618.4
10'	1598.0	218.7	10'	2151.7	390.7	10'	2743.1	622.8
20	1606.9	221.1	20	2161.2	394.1	20	2753.4	627.2
30	1615.9	223.5	30	2170.8	397.4	30	2763.7	631.7
40	1624.9	226.0	40	2180.3	400.8	40	2773.9	636.2
50	1633.9	228.4	50	2189.9	404.2	50	2784.2	640.7
32	1643.0	230.9	42	2199.4	407.6	52	2794.5	645.2
10	1652.0	233.4	10	2209.0	411.1	10	2804.9	649.7
20	1661.0	235.9	20	2218.6	414.5	20	2815.2	654.3
30	1670.0	238.4	30	2228.1	418.0	30	2825.6	658.8
40	1679.1	241.0	40	2237.7	421.4	40	2835.9	663.4
50	1688.1	243.5	50	2247.3	425.0	50	2846.3	668.0
33	1697.2	246.1	43	2257.0	428.5	53	2856.7	672.7
10	1706.3	248.7	10	2266.6	432.0	10	2867.1	677.3
20	1715.3	251.3	20	2276.2	435.6	20	2877.5	682.0
30	1724.4	253.9	30	2285.9	439.2	30	2888.0	686.7
40	1733.5	256.5	40	2295.6	442.8	40	2898.4	691.4
50	1742.6	259.1	50	2305.2	446.4	50	2908.9	696.1
34	1751.7	261.8	44	2314.9	450.0	54	2919.4	700.9
10	1760.8	264.5	10	2324.6	453.6	10	2929.9	705.7
20	1770.0	267.2	20	2334.3	457.3	20	2940.4	710.5
30	1779.1	269.9	30	2344.1	461.0	30	2951.0	715.3
40	1788.2	272.6	40	2353.8	464.6	40	2961.5	720.1
50	1797.4	275.3	50	2363.5	468.4	50	2972.1	725.0
35	1806.6	278.1	45	2373.3	472.1	55	2982.7	729.9
10	1815.7	280.8	10	2383.1	475.8	10	2993.3	734.8
20	1824.9	283.6	20	2392.8	479.6	20	3003.9	739.7
30	1834.1	286.4	30	2402.6	483.8	30	3014.5	744.6
40	1843.3	289.2	40	2412.4	487.2	40	3025.2	749.6
50	1852.5	292.0	50	2422.3	491.0	50	3035.8	754.6
36	1861.7	294.9	46	2432.1	494.8	56	3046.5	759.6
10	1870.9	297.7	10	2441.9	498.7	10	3057.2	764.6
20	1880.1	300.6	20	2451.8	502.5	20	3067.9	769.7
30	1889.4	303.5	30	2461.7	506.4	30	3078.7	774.7
40	1898.6	306.4	40	2471.5	510.3	40	3089.4	779.8
50	1907.9	309.3	50	2481.4	514.3	50	3100.2	784.9
37	1917.1	312.2	47	2491.3	518.2	57	3110.9	790.1
10	1926.4	315.2	10	2501.2	522.2	10	3121.7	795.2
20	1935.7	318.1	20	2511.2	526.1	20	3132.6	800.4
30	1945.0	321.1	30	2521.1	530.1	30	3143.4	805.6
40	1954.3	324.1	40	2531.1	534.2	40	3154.2	810.9
50	1963.6	327.1	50	2541.0	538.2	50	3165.1	816.1
38	1972.9	330.2	48	2551.0	542.2	58	3176.0	821.4
10	1982.2	333.2	10	2561.0	546.3	10	3186.9	826.7
20	1991.5	336.3	20	2571.0	550.4	20	3197.8	832.0
30	2000.9	339.3	30	2581.0	554.5	30	3208.8	837.3
40	2010.2	342.4	40	2591.0	558.6	40	3219.7	842.7
50	2019.6	345.5	50	2601.1	562.8	50	3230.7	848.1
39	2029.0	348.6	49	2611.2	566.9	59	3241.7	853.5
10	2038.4	351.8	10	2621.2	571.1	10	3252.7	858.9
20	2047.8	354.9	20	2631.3	575.3	20	3263.7	864.3
30	2057.2	358.1	30	2641.4	579.5	30	3274.8	869.8
40	2066.6	361.3	40	2651.5	583.8	40	3285.8	875.3
50	2076.0	364.5	50	2661.6	588.0	50	3296.9	880.8
40	2085.4	367.7	50	2671.8	592.3	60	3308.0	886.4
10	2094.9	371.0	10	2681.9	596.6	10	3319.1	892.0
20	2104.3	374.2	20	2692.1	600.9	20	3330.3	897.5
30	2113.8	377.5	30	2702.3	605.3	30	3341.4	903.2
40	2123.3	380.8	40	2712.5	609.6	40	3352.6	908.8
50	2132.7	384.1	50	2722.7	614.0	50	3363.8	914.5

TABLE IV.—TANGENTS AND EXTERNALS TO A 1° CURVE.

Central Angle	Tangent	External	Central Angle	Tangent	External	Central Angle	Tangent	External
61°	3375.0	920.2	71°	4086.9	1308.2	81°	4893.6	1805.3
10'	3386.3	925.9	10'	4099.5	1315.6	10'	4908.0	1814.7
20	3397.5	931.6	20	4112.1	1322.9	20	4922.5	1824.1
30	3408.8	937.3	30	4124.8	1330.3	30	4937.0	1833.6
40	3420.1	943.1	40	4137.4	1337.7	40	4951.5	1843.1
50	3431.4	948.9	50	4150.1	1345.1	50	4966.1	1852.6
62	3442.7	954.8	72	4162.8	1352.6	82	4980.7	1862.2
10	3454.1	960.6	10	4175.6	1360.1	10	4995.4	1871.8
20	3465.4	966.5	20	4188.5	1367.6	20	5010.0	1881.5
30	3476.8	972.4	30	4201.2	1375.2	30	5024.8	1891.2
40	3488.3	978.3	40	4214.0	1382.8	40	5039.5	1900.9
50	3499.7	984.3	50	4226.8	1390.4	50	5054.3	1910.7
63	3511.1	990.2	73	4239.7	1398.0	83	5069.2	1920.5
10	3522.6	996.2	10	4252.6	1405.7	10	5084.0	1930.4
20	3534.1	1002.3	20	4265.6	1413.5	20	5099.0	1940.3
30	3545.6	1008.3	30	4278.5	1421.2	30	5113.9	1950.3
40	3557.2	1014.4	40	4291.5	1429.0	40	5128.9	1960.2
50	3568.7	1020.5	50	4304.6	1436.8	50	5143.9	1970.3
64	3580.3	1026.6	74	4317.6	1444.6	84	5159.0	1980.4
10	3591.9	1032.8	10	4330.7	1452.5	10	5174.1	1990.5
20	3603.5	1039.0	20	4343.8	1460.4	20	5189.3	2000.6
30	3615.1	1045.2	30	4356.9	1468.4	30	5204.4	2010.8
40	3626.8	1051.4	40	4370.1	1476.4	40	5219.7	2021.1
50	3638.5	1057.7	50	4383.3	1484.4	50	5234.9	2031.4
65	3650.2	1063.9	75	4396.5	1492.4	85	5250.3	2041.7
10	3661.9	1070.2	10	4409.8	1500.5	10	5265.6	2052.1
20	3673.7	1076.6	20	4423.1	1508.6	20	5281.0	2062.5
30	3685.4	1082.9	30	4436.4	1516.7	30	5296.4	2073.0
40	3697.2	1089.3	40	4449.7	1524.9	40	5311.9	2083.5
50	3709.0	1095.7	50	4463.1	1533.1	50	5327.4	2094.1
66	3720.9	1102.2	76	4476.5	1541.4	86	5343.0	2104.7
10	3732.7	1108.6	10	4489.9	1549.7	10	5358.6	2115.3
20	3744.6	1115.1	20	4503.4	1558.0	20	5374.2	2126.0
30	3756.5	1121.7	30	4516.9	1566.3	30	5389.9	2136.7
40	3768.5	1128.2	40	4530.4	1574.7	40	5405.6	2147.5
50	3780.4	1134.8	50	4544.0	1583.1	50	5421.4	2158.4
67	3792.4	1141.4	77	4557.6	1591.6	87	5437.2	2169.2
10	3804.4	1148.0	10	4571.2	1600.1	10	5453.1	2180.2
20	3816.4	1154.7	20	4584.8	1608.6	20	5469.0	2191.1
30	3828.4	1161.3	30	4598.5	1617.1	30	5484.9	2202.2
40	3840.5	1168.1	40	4612.2	1625.7	40	5500.9	2213.2
50	3852.6	1174.8	50	4626.0	1634.4	50	5517.0	2224.3
68	3864.7	1181.6	78	4639.8	1643.0	88	5533.1	2235.5
10	3876.8	1188.4	10	4653.6	1651.7	10	5549.2	2246.7
20	3889.0	1195.2	20	4667.4	1660.5	20	5565.4	2258.0
30	3901.2	1202.0	30	4681.3	1669.2	30	5581.6	2269.3
40	3913.4	1208.9	40	4695.2	1678.1	40	5597.8	2280.6
50	3925.6	1215.8	50	4709.2	1686.9	50	5614.2	2292.0
69	3937.9	1222.7	79	4723.2	1695.8	89	5630.5	2303.5
10	3950.2	1229.7	10	4737.2	1704.7	10	5646.9	2315.0
20	3962.5	1236.7	20	4751.2	1713.7	20	5663.4	2326.6
30	3974.8	1243.7	30	4765.3	1722.7	30	5679.9	2338.2
40	3987.2	1250.8	40	4779.4	1731.7	40	5696.4	2349.8
50	3999.5	1257.9	50	4793.6	1740.8	50	5713.0	2361.5
70	4011.9	1265.0	80	4807.7	1749.9	90	5729.7	2373.3
10	4024.4	1272.1	10	4822.0	1759.0	10	5746.3	2385.1
20	4036.8	1279.3	20	4836.2	1768.2	20	5763.1	2397.0
30	4049.3	1286.5	30	4850.5	1777.4	30	5779.9	2408.9
40	4061.8	1293.6	40	4864.8	1786.7	40	5796.7	2420.9
50	4074.4	1300.9	50	4879.2	1796.0	50	5813.6	2432.9

TABLE IV.—TANGENTS AND EXTERNALS TO A 1° CURVE.

Central Angle	Tangent	External	Central Angle	Tangent	External	Central Angle	Tangent	External
91°	5830.5	2444.9	101°	6950.6	3278.1	111°	8336.7	4386.1
10'	5847.5	2457.1	10'	6971.3	3294.1	10'	8362.7	4407.6
20	5864.6	2469.3	20	6992.0	3310.1	20	8388.9	4429.2
30	5881.7	2481.5	30	7012.7	3326.1	30	8415.1	4450.9
40	5898.8	2493.8	40	7033.6	3342.3	40	8441.5	4472.7
50	5916.0	2506.1	50	7054.5	3358.5	50	8468.0	4494.6
92	5933.2	2518.5	102	7075.5	3374.9	112	8494.6	4516.6
10	5950.5	2531.0	10	7096.6	3391.2	10	8521.3	4538.8
20	5967.9	2543.5	20	7117.8	3407.7	20	8548.1	4561.1
30	5985.3	2556.0	30	7139.0	3424.3	30	8575.0	4583.4
40	6002.7	2568.6	40	7160.3	3440.9	40	8602.1	4606.0
50	6020.2	2581.3	50	7181.7	3457.6	50	8629.3	4628.6
93	6037.8	2594.0	103	7203.2	3474.4	113	8656.6	4651.3
10	6055.4	2606.8	10	7224.7	3491.3	10	8684.0	4674.2
20	6073.1	2619.7	20	7246.3	3508.2	20	8711.5	4697.2
30	6090.8	2632.6	30	7268.0	3525.2	30	8739.2	4720.3
40	6108.6	2645.5	40	7289.8	3542.4	40	8767.0	4743.6
50	6126.4	2658.5	50	7311.7	3559.6	50	8794.9	4766.9
94	6144.3	2671.6	104	7333.6	3576.8	114	8822.9	4790.4
10	6162.6	2684.7	10	7355.6	3594.2	10	8851.0	4814.1
20	6180.2	2697.9	20	7377.8	3611.7	20	8879.3	4837.8
30	6198.3	2711.2	30	7399.9	3629.2	30	8907.7	4861.7
40	6216.4	2724.5	40	7422.2	3646.8	40	8936.3	4885.7
50	6234.6	2737.9	50	7444.6	3664.5	50	8965.0	4909.9
95	6252.8	2751.3	105	7467.0	3682.3	115	8993.8	4934.1
10	6271.1	2764.8	10	7489.6	3700.2	10	9022.7	4958.6
20	6289.4	2778.3	20	7512.2	3718.2	20	9051.7	4983.1
30	6307.9	2792.0	30	7534.9	3736.2	30	9080.9	5007.8
40	6326.3	2805.6	40	7557.7	3754.4	40	9110.3	5032.6
50	6344.8	2819.4	50	7580.5	3772.6	50	9139.8	5057.6
96	6363.4	2833.2	106	7603.5	3791.0	116	9169.4	5082.7
10	6382.1	2847.0	10	7626.6	3809.4	10	9199.1	5107.9
20	6400.8	2861.0	20	7649.7	3827.9	20	9229.0	5133.3
30	6419.5	2875.0	30	7672.9	3846.5	30	9259.0	5158.8
40	6438.4	2889.0	40	7696.3	3865.2	40	9289.2	5184.5
50	6457.3	2903.1	50	7719.7	3884.0	50	9319.5	5210.3
97	6476.2	2917.3	107	7743.2	3902.9	117	9349.9	5236.2
10	6495.2	2931.6	10	7766.8	3921.9	10	9380.5	5262.3
20	6514.3	2945.9	20	7790.5	3940.9	20	9411.3	5288.6
30	6533.4	2960.3	30	7814.3	3960.1	30	9442.2	5315.0
40	6552.6	2974.7	40	7838.1	3979.4	40	9473.2	5341.5
50	6571.9	2989.2	50	7862.1	3998.7	50	9504.4	5368.2
98	6591.2	3003.8	108	7886.2	4018.2	118	9535.7	5395.1
10	6610.6	3018.4	10	7910.4	4037.8	10	9567.2	5422.1
20	6630.1	3033.1	20	7934.6	4057.4	20	9598.9	5449.2
30	6649.6	3047.9	30	7959.0	4077.2	30	9630.7	5476.5
40	6669.2	3062.8	40	7983.5	4097.1	40	9662.6	5504.0
50	6688.8	3077.7	50	8008.0	4117.0	50	9694.7	5531.7
99	6708.6	3092.7	109	8032.7	4137.1	119	9727.0	5559.4
10	6728.4	3107.7	10	8057.4	4157.3	10	9759.4	5587.4
20	6748.2	3122.9	20	8082.3	4177.5	20	9792.0	5615.5
30	6768.1	3138.1	30	8107.3	4197.9	30	9824.8	5643.8
40	6788.1	3153.3	40	8132.3	4218.4	40	9857.7	5672.3
50	6808.2	3168.7	50	8157.5	4239.0	50	9890.8	5700.9
100	6828.3	3184.1	110	8182.8	4259.7	120	9924.0	5729.7
10	6848.5	3199.6	10	8208.2	4280.5	10	9957.5	5758.6
20	6868.8	3215.1	20	8233.7	4301.4	20	9991.0	5787.7
30	6889.2	3230.8	30	8259.3	4322.4	30	10025.0	5817.0
40	6909.6	3246.5	40	8285.0	4343.6	40	10059.0	5846.5
50	6930.1	3262.3	50	8310.8	4364.8	50	10093.0	5876.1

TABLE V.—CORRECTIONS FOR TANGENTS AND EXTERNALS.

These corrections are to be added to the approximate values, found by dividing the tangent, or external, for a 1° curve (Table IV) by the degree of curve, in order to obtain the true tangents, or externals. Intermediate values may be obtained by interpolation.

FOR TANGENTS ADD

Central Angle	DEGREE OF CURVE													
	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°
10°	.03	.06	.09	.13	.16	.19	.22	.25	.28	.31	.34	.38	.42	.46
15°	.04	.10	.14	.19	.24	.29	.34	.39	.45	.51	.53	.58	.63	.68
20°	.06	.13	.19	.26	.32	.39	.45	.51	.58	.65	.72	.79	.84	.90
25°	.08	.16	.24	.33	.40	.49	.58	.67	.75	.83	.90	.99	1.06	1.14
30°	.10	.19	.29	.39	.49	.59	.69	.79	.89	.99	1.09	1.20	1.29	1.39
35°	.11	.22	.34	.47	.58	.69	.79	.81	.92	1.04	1.29	1.42	1.54	1.66
40°	.13	.26	.40	.53	.67	.80	.93	1.06	1.20	1.34	1.49	1.64	1.79	1.94
45°	.15	.30	.44	.60	.76	.91	1.06	1.21	1.37	1.52	1.70	1.87	2.04	2.21
50°	.17	.34	.51	.68	.85	1.02	1.19	1.36	1.54	1.72	1.91	2.10	2.29	2.48
55°	.19	.38	.57	.76	.95	1.14	1.32	1.52	1.72	1.92	2.14	2.35	2.56	2.77
60°	.21	.42	.63	.84	1.05	1.27	1.49	1.71	1.94	2.17	2.38	2.60	2.83	3.07
65°	.23	.46	.69	.93	1.16	1.40	1.64	1.88	2.13	2.38	2.63	2.88	3.13	3.39
70°	.25	.51	.76	1.02	1.28	1.54	1.80	2.06	2.33	2.60	2.88	3.16	3.44	3.72
75°	.27	.56	.83	1.12	1.40	1.69	1.98	2.27	2.57	2.87	3.16	3.47	3.78	4.09
80°	.30	.61	.91	1.22	1.53	1.84	2.15	2.46	2.78	3.10	3.44	3.78	4.12	4.46
85°	.33	.66	1.00	1.33	1.68	2.02	2.36	2.70	3.05	3.40	3.77	4.14	4.55	4.89
90°	.36	.72	1.09	1.45	1.83	2.20	2.57	2.94	3.32	3.70	4.10	4.50	4.91	5.32
95°	.39	.79	1.19	1.55	2.00	2.40	2.80	3.20	3.61	4.02	4.40	4.98	5.38	5.83
100°	.43	.86	1.30	1.74	2.18	2.62	3.06	3.50	3.95	4.40	4.88	5.37	5.85	6.34
110°	.51	1.03	1.56	2.08	2.61	3.14	3.67	4.21	4.76	5.31	5.86	6.43	7.01	7.60
120°	.62	1.25	1.93	2.52	3.16	3.81	4.45	5.11	5.77	6.44	7.12	7.80	8.50	9.22

FOR EXTERNALS ADD

Central Angle	DEGREE OF CURVE													
	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°
10°	.001	.003	.004	.006	.007	.008	.009	.011	.012	.014	.015	.017	.018	.020
15°	.003	.007	.010	.014	.018	.023	.027	.029	.032	.035	.039	.043	.047	.051
20°	.006	.011	.017	.022	.028	.034	.038	.045	.051	.057	.063	.070	.076	.083
25°	.009	.018	.027	.036	.046	.056	.065	.074	.083	.093	.106	.120	.127	.135
30°	.013	.025	.038	.051	.065	.078	.090	.103	.116	.129	.149	.170	.179	.188
35°	.018	.035	.054	.072	.086	.109	.131	.153	.175	.197	.213	.230	.247	.264
40°	.023	.046	.070	.093	.117	.141	.172	.203	.234	.265	.277	.290	.315	.341
45°	.030	.060	.093	.119	.153	.184	.216	.254	.289	.325	.351	.378	.411	.445
50°	.037	.075	.116	.151	.189	.227	.266	.305	.345	.384	.425	.467	.508	.550
55°	.046	.093	.142	.188	.236	.283	.332	.381	.429	.479	.530	.582	.641	.700
60°	.056	.112	.168	.225	.283	.340	.398	.457	.516	.575	.636	.697	.774	.851
65°	.067	.135	.204	.273	.343	.412	.483	.554	.625	.697	.771	.845	.922	1.01
70°	.080	.159	.240	.321	.403	.485	.568	.652	.735	.819	.906	.994	1.08	1.17
75°	.095	.182	.286	.383	.480	.578	.678	.777	.877	.977	1.07	1.18	1.29	1.39
80°	.110	.220	.332	.445	.558	.671	.787	.903	1.02	1.13	1.25	1.38	1.50	1.62
85°	.128	.259	.391	.524	.657	.790	.926	1.06	1.20	1.34	1.47	1.62	1.76	1.91
90°	.149	.299	.450	.603	.756	.910	1.07	1.22	1.38	1.54	1.70	1.87	2.03	2.20
95°	.174	.350	.522	.706	.895	1.06	1.25	1.43	1.62	1.80	1.99	2.18	2.38	2.58
100°	.200	.401	.604	.809	1.01	1.22	1.43	1.64	1.85	2.06	2.28	2.50	2.73	2.96
110°	.268	.536	.806	1.08	1.35	1.63	1.91	2.20	2.48	2.76	3.05	3.35	3.66	3.96
120°	.360	.721	1.08	1.45	1.82	2.19	2.57	2.95	3.33	3.72	4.11	4.50	4.91	5.32

TABLE VI.—CORRECTIONS FOR SUB-CHORDS AND LONG CHORDS.

FOR SUB-CHORDS ADD										Excess of arc per 100 ft.	LONG CHORDS				
D	10	20	30	40	50	60	70	80	90		D	200	300	400	500
4°	.00	.00	.01	.01	.01	.01	.01	.01	.00	.02	1	199.99	299.97	399.92	499.85
6	.00	.01	.01	.02	.02	.02	.02	.01	.01	.05	2	199.97	299.88	399.70	499.39
8	.01	.02	.02	.03	.03	.03	.03	.02	.01	.08	3	199.93	299.73	399.32	498.63
10	.01	.02	.03	.04	.05	.05	.05	.04	.02	.13	4	199.88	299.51	398.78	497.57
12	.02	.04	.05	.06	.07	.07	.07	.05	.03	.18	5	199.81	299.24	398.10	496.20
14	.02	.05	.07	.08	.09	.10	.09	.07	.04	.25	6	199.73	298.90	397.26	494.53
16	.03	.06	.09	.11	.12	.12	.12	.09	.05	.33	7	199.63	298.51	396.28	492.57
18	.04	.08	.11	.14	.15	.16	.15	.12	.07	.41	8	199.51	298.05	395.14	490.31
20	.05	.10	.14	.17	.19	.20	.18	.15	.09	.51	9	199.38	297.54	393.86	487.75
22	.06	.12	.17	.21	.23	.24	.22	.18	.10	.62	10	199.24	296.96	392.42	484.90
24	.07	.14	.20	.25	.28	.28	.26	.21	.12	.74	12	198.90	295.63	389.12	478.34
26	.09	.17	.24	.29	.32	.33	.31	.25	.15	.86	14	198.51	294.06	385.22	470.65
28	.10	.19	.27	.34	.37	.38	.36	.29	.17	1.00	16	198.05	292.25	380.76	461.86
30	.11	.22	.31	.39	.43	.44	.41	.33	.19	1.15	18	197.54	290.21	375.74	452.02
32	.13	.25	.36	.44	.49	.50	.47	.38	.22	1.31	20	196.96	287.94	370.17	441.15
34	.15	.28	.40	.50	.55	.57	.53	.43	.25	1.48	22	196.32	285.44	364.06	429.30
36	.17	.32	.45	.56	.62	.64	.59	.48	.28	1.66	24	195.63	282.71	357.43	416.53
38	.18	.36	.51	.62	.70	.71	.66	.53	.31	1.86	26	194.87	279.76	350.30	402.89
40	.21	.40	.56	.69	.77	.79	.73	.59	.35	2.06	28	194.06	276.59	342.69	388.43
42	.23	.44	.62	.76	.85	.87	.81	.65	.38	2.28	30	193.18	273.20	334.61	373.20
44	.25	.48	.68	.84	.94	.96	.89	.72	.42	2.50	32	192.25	269.61	326.08	357.28
46	.27	.52	.75	.92	1.02	1.05	.98	.78	.46	2.74	34	191.26	265.81	317.12	340.73
48	.30	.57	.81	1.00	1.12	1.14	1.06	.86	.50	2.99	36	190.21	261.80	307.77	323.61
50	.32	.62	.89	1.09	1.21	1.24	1.15	.93	.55	3.24	38	189.10	257.60	298.03	305.99
52	.35	.67	.96	1.18	1.31	1.35	1.25	1.01	.59	3.52	40	187.94	253.21	287.94	287.94
54	.38	.73	1.04	1.28	1.42	1.46	1.35	1.09	.64	3.80	42	186.72	248.63	277.51	269.54
56	.41	.78	1.12	1.38	1.53	1.57	1.46	1.17	.69	4.09	44	185.44	243.87	266.78	250.85
58	.44	.84	1.20	1.48	1.65	1.69	1.57	1.26	.74	4.40	46	184.10	239.93	255.78	231.95
60	.47	.91	1.29	1.59	1.76	1.81	1.68	1.35	.80	4.72	48	182.71	233.83	244.51	212.92

NOTE.—When a chord of less than 100 ft. is used the corrections given in the above table should be added to the nominal length of chord to get the length which should be used in order that the 100 ft. points will check with those obtained by using the standard 100 ft. chord. Thus in locating a 14° curve by 25 ft. chords measure 25'.06 for each chord. Long chords are useful in passing obstacles.

TABLE VII.—MIDDLE ORDINATES FOR RAILS IN FEET.

Deg. of Curve	LENGTH OF RAILS							Deg. of Curve	LENGTH OF RAILS.						
	32	30	28	26	24	22	20		32	30	28	26	24	22	20
1°	.022	.020	.016	.013	.011	.009	.008	16°	.356	.313	.273	.236	.200	.170	.139
2	.045	.038	.034	.029	.025	.021	.017	17	.378	.333	.290	.252	.213	.180	.148
3	.037	.058	.051	.044	.037	.031	.026	18	.400	.351	.306	.265	.225	.190	.156
4	.089	.079	.069	.060	.050	.042	.035	19	.423	.371	.324	.280	.238	.201	.165
5	.112	.099	.086	.074	.063	.053	.044	20	.445	.392	.341	.296	.250	.212	.174
6	.134	.117	.102	.088	.076	.064	.052	21	.466	.410	.357	.309	.262	.222	.182
7	.156	.137	.120	.104	.088	.074	.061	22	.487	.430	.375	.325	.275	.233	.191
8	.179	.158	.137	.119	.100	.085	.070	23	.509	.450	.390	.338	.287	.243	.199
9	.201	.175	.153	.133	.112	.095	.078	24	.531	.469	.408	.354	.299	.253	.208
10	.223	.196	.171	.148	.125	.106	.087	25	.552	.486	.424	.367	.311	.263	.216
11	.245	.216	.188	.163	.139	.117	.096	26	.573	.506	.441	.382	.323	.274	.225
12	.268	.236	.206	.179	.151	.128	.105	27	.594	.524	.457	.396	.335	.284	.233
13	.290	.254	.222	.192	.163	.138	.113	28	.618	.545	.475	.411	.348	.294	.242
14	.312	.275	.239	.207	.175	.148	.122	29	.638	.564	.491	.424	.361	.303	.250
15	.334	.295	.257	.223	.188	.159	.131	30	.660	.583	.508	.438	.374	.313	.259


SLOPE REDUCTIONS.

When distances are measured on a slope they may be reduced to the equivalent horizontal distance by the following approximate rule:— subtract from the slope distance the square of the rise divided by twice the slope distance. Thus for a slope distance of 250.3 ft. and a rise of 15 ft. correction = $15^2 \div 2 \times 250.3 = .45$ (by slide rule) or horizontal distance = $250.3 - .45 = 249.85$. When vertical angle = V. A. is measured horizontal distance = slope distance — slope distance (1 — Cos. V. A.). Thus for slope distance of 248.7 ft. and V. A. of $4^\circ 20'$ from Table VIII Cos = .99714 and correction = $1 - .99714 = .00286$ per foot or total of $.286 \times 2\frac{1}{2}$ (near enough) = .57 and horizontal distance = $248.7 - .57 = 248.13$ ft.

See fig. (a).

TRIGONOMETRICAL FORMULAS.

$$\begin{aligned} \sin. & A = \frac{a}{c} \\ \cos. & A = \frac{b}{c} \\ \tan. & A = \frac{a}{b} \\ \cot. & A = \frac{b}{a} \\ \sec. & A = \frac{c}{b} \\ \text{cosec.} & A = \frac{c}{a} \end{aligned}$$

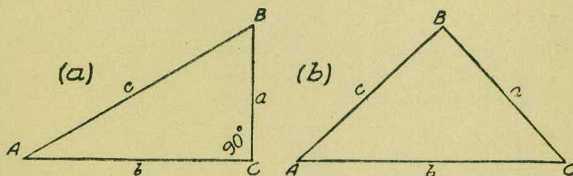

FORMULA FOR SOLVING TRIANGLES.

Given	Sought.	Right triangles. See fig. (a).
a, c	A, B, b	$\sin. A = \frac{a}{c}, \cos. B = \frac{a}{c}, b = \sqrt{(c+a)(c-a)}$
a, b	A, B, c	$\tan. A = \frac{a}{b}, \cot. B = \frac{a}{b}, c = \sqrt{a^2 + b^2}$
A, a	B, b, c	$B = 90^\circ - A, b = a \cot. A, c = \frac{a}{\sin. A}$
A, b	B, a, c	$B = 90^\circ - A, a = b \tan. A, c = \frac{b}{\cos. A}$
A, c	B, a, b	$B = 90^\circ - A, a = c \sin. A, b = c \cos. A$
Given	Sought.	Oblique triangles. See fig. (b).
A, B, a	b	$b = \frac{a \sin. B}{\sin. A}$
A, a, b	B	$\sin. B = \frac{b \sin. A}{a}$
a, b, C	$A - B$	$\tan. \frac{1}{2}(A - B) = \frac{(a - b) \tan. \frac{1}{2}(A + B)}{a + b}$
a, b, c	A	$\left\{ \begin{aligned} \text{If } s = \frac{1}{2}(a + b + c), \sin. \frac{1}{2} A &= \sqrt{\frac{(s - b)(s - c)}{bc}} \\ \cos. \frac{1}{2} A &= \sqrt{\frac{s(s - a)}{bc}}, \tan. \frac{1}{2} A = \sqrt{\frac{(s - b)(s - c)}{s(s - a)}}, \\ \sin. A &= \frac{2\sqrt{(s - a)(s - b)(s - c)s}}{bc} \end{aligned} \right.$
A, B, C, a	area	$\text{area} = \frac{a^2 \sin. B \sin. C}{2 \sin. A}$
A, b, c	area	$\text{area} = \frac{1}{2} bc \sin. A$
a, b, c	area	$s = \frac{1}{2}(a + b + c), \text{area} = \sqrt{s(s - a)(s - b)(s - c)}$

TABLE VIII.—NATURAL TRIGONOMETRICAL FUNCTIONS.

Angle	Sine.	Tan.	Cotg.	Cosin.		Angle	Sine.	Tan.	Cotg.	Cosin.	
0	0	0	∞	1	90	0	0	∞	1	0	
10	.0029	.0029	343.8	I	50	8	.1392	.1405	7.115	.99027	
20	.0058	.0058	171.9	.99998	40	10	.1421	.1435	6.968	.98986	
30	.0087	.0087	114.6	.99996	30	20	.1449	.1465	6.827	.98944	
40	.0116	.0116	85.94	.99993	20	30	.1478	.1495	6.691	.98902	
50	.0145	.0145	68.75	.99989	10	40	.1507	.1524	6.561	.98858	
						50	.1536	.1554	6.435	.98814	
1	.0175	.0175	57.29	.99985	89	9	.1564	.1584	6.314	.98769	
10	.0204	.0204	49.10	.99979	50	10	.1593	.1614	6.197	.98723	
20	.0233	.0233	42.96	.99973	40	20	.1622	.1644	6.084	.98676	
30	.0262	.0262	38.19	.99966	30	30	.1650	.1673	5.976	.98629	
40	.0291	.0291	34.37	.99958	20	40	.1679	.1703	5.871	.98580	
50	.0320	.0320	31.24	.99949	10	50	.1708	.1733	5.769	.98531	
2	.0349	.0349	28.64	.99939	88	10	.1736	.1763	5.671	.98481	
10	.0378	.0378	26.43	.99929	50	10	.1765	.1793	5.576	.98430	
20	.0407	.0407	24.54	.99917	40	20	.1794	.1823	5.485	.98378	
30	.0436	.0437	22.90	.99905	30	30	.1822	.1853	5.396	.98325	
40	.0465	.0466	21.47	.99892	20	40	.1851	.1883	5.309	.98272	
50	.0494	.0495	20.21	.99878	10	50	.1880	.1914	5.226	.98218	
3	.0523	.0524	19.08	.99863	87	11	.1908	.1944	5.145	.98163	
10	.0552	.0553	18.07	.99847	50	10	.1937	.1974	5.066	.98107	
20	.0581	.0582	17.17	.99831	40	20	.1965	.2004	4.989	.98050	
30	.0610	.0612	16.35	.99813	30	30	.1994	.2035	4.915	.97992	
40	.0640	.0641	15.60	.99795	20	40	.2022	.2065	4.843	.97934	
50	.0669	.0670	14.92	.99776	10	50	.2051	.2095	4.773	.97875	
4	.0698	.0699	14.30	.99756	86	12	.2079	.2126	4.705	.97815	
10	.0727	.0729	13.73	.99736	50	10	.2108	.2156	4.638	.97754	
20	.0756	.0758	13.20	.99714	40	20	.2136	.2186	4.574	.97692	
30	.0785	.0787	12.71	.99692	30	30	.2164	.2217	4.511	.97630	
40	.0814	.0816	12.25	.99668	20	40	.2193	.2247	4.449	.97566	
50	.0843	.0846	11.83	.99644	10	50	.2221	.2278	4.390	.97502	
5	.0872	.0875	11.43	.99619	85	13	.2250	.2309	4.331	.97437	
10	.0901	.0904	11.06	.99594	50	10	.2278	.2339	4.275	.97371	
20	.0929	.0934	10.71	.99567	40	20	.2306	.2370	4.219	.97304	
30	.0958	.0963	10.39	.99540	30	30	.2334	.2401	4.165	.97237	
40	.0987	.0992	10.08	.99511	20	40	.2363	.2432	4.113	.97169	
50	.1016	.1022	9.788	.99482	10	50	.2391	.2462	4.061	.97100	
6	.1045	.1051	9.514	.99452	84	14	.2419	.2493	4.011	.97030	
10	.1074	.1080	9.255	.99421	50	10	.2447	.2524	3.962	.96959	
20	.1103	.1110	9.010	.99390	40	20	.2476	.2555	3.914	.96887	
30	.1132	.1139	8.777	.99357	30	30	.2504	.2586	3.867	.96815	
40	.1161	.1169	8.556	.99324	20	40	.2532	.2617	3.821	.96742	
50	.1190	.1198	8.345	.99290	10	50	.2560	.2648	3.776	.96667	
7	.1219	.1228	8.144	.99255	83	15	.2588	.2679	3.732	.96593	
10	.1248	.1257	7.953	.99219	50	10	.2616	.2711	3.689	.96517	
20	.1276	.1287	7.770	.99182	40	20	.2644	.2742	3.647	.96440	
30	.1305	.1317	7.596	.99144	30	30	.2672	.2773	3.606	.96363	
40	.1334	.1346	7.429	.99106	20	40	.2700	.2805	3.566	.96285	
50	.1363	.1376	7.269	.99067	10	50	.2728	.2836	3.526	.96206	
					82						
	Cosin.	Cotg.	Tan.	Sine.	Angle.		Cosin.	Cotg.	Tan.	Sine.	Angle.

TABLE VIII.—NATURAL TRIGONOMETRICAL FUNCTIONS.

Angle	Sine.	Tan.	Cotg.	Cosin.	Angle	Sine.	Tan.	Cotg.	Cosin.	
<i>or</i> 16	.2756	.2867	3.487	.96126	74	.4067	.4452	2.246	.91355	
10	.2784	.2899	3.450	.96046	50	.4094	.4487	2.229	.91236	
20	.2812	.2931	3.412	.95964	40	.4120	.4522	2.211	.91116	
30	.2840	.2962	3.376	.95882	30	.4147	.4557	2.194	.90996	
40	.2868	.2994	3.340	.95799	20	.4173	.4592	2.177	.90875	
50	.2896	.3026	3.305	.95715	10	.4200	.4628	2.161	.90753	
17	.2924	.3057	3.271	.95615	73	.4226	.4663	2.145	.90631	
10	.2952	.3089	3.237	.95545	50	.4253	.4699	2.128	.90507	
20	.2979	.3121	3.204	.95459	40	.4279	.4734	2.112	.90383	
30	.3007	.3153	3.172	.95372	30	.4305	.4770	2.097	.90259	
40	.3035	.3185	3.140	.95284	20	.4331	.4806	2.081	.90133	
50	.3062	.3217	3.108	.95195	10	.4358	.4841	2.066	.90007	
18	.3090	.3249	3.078	.95106	72	.4384	.4877	2.050	.89879	
10	.3118	.3281	3.048	.95015	50	.4410	.4913	2.035	.89752	
20	.3145	.3314	3.018	.94924	40	.4436	.4950	2.020	.89623	
30	.3173	.3346	2.989	.94832	30	.4462	.4986	2.006	.89493	
40	.3201	.3378	2.960	.94740	20	.4488	.5022	1.991	.89363	
50	.3228	.3411	2.932	.94646	10	.4514	.5059	1.977	.89232	
19	.3256	.3443	2.904	.94552	71	.4540	.5095	1.963	.89101	
10	.3283	.3476	2.877	.94457	50	.4566	.5132	1.949	.88968	
20	.3311	.3508	2.850	.94361	40	.4592	.5169	1.935	.88835	
30	.3338	.3541	2.824	.94264	30	.4617	.5206	1.921	.88701	
40	.3365	.3574	2.798	.94167	20	.4643	.5243	1.907	.88566	
50	.3393	.3607	2.773	.94068	10	.4669	.5280	1.894	.88431	
20	.3420	.3640	2.747	.93969	70	.4695	.5317	1.881	.88295	
10	.3448	.3673	2.723	.93869	50	.4720	.5354	1.868	.88158	
20	.3475	.3706	2.669	.93769	40	.4746	.5392	1.855	.88020	
30	.3502	.3739	2.675	.93667	30	.4772	.5430	1.842	.87882	
40	.3529	.3772	2.651	.93565	20	.4797	.5467	1.829	.87743	
50	.3557	.3805	2.628	.93462	10	.4823	.5505	1.816	.87603	
21	.3584	.3839	2.605	.93358	69	.4848	.5543	1.804	.87462	
10	.3611	.3872	2.583	.93255	50	.4874	.5581	1.792	.87321	
20	.3638	.3906	2.560	.93148	40	.4899	.5619	1.780	.87178	
30	.3665	.3939	2.539	.93042	30	.4924	.5658	1.767	.87036	
40	.3692	.3973	2.517	.92935	20	.4950	.5696	1.756	.86892	
50	.3719	.4006	2.496	.92827	10	.4975	.5735	1.744	.86748	
22	.3746	.4040	2.475	.92718	68	.5000	.5774	1.732	.86603	
10	.3773	.4074	2.455	.92609	50	.5025	.5812	1.720	.86457	
20	.3800	.4108	2.434	.92499	40	.5050	.5851	1.709	.86310	
30	.3827	.4142	2.414	.92388	30	.5075	.5890	1.698	.86163	
40	.3854	.4176	2.394	.92276	20	.5100	.5930	1.686	.86015	
50	.3881	.4210	2.375	.92164	10	.5125	.5969	1.675	.85866	
23	.3907	.4245	2.356	.92050	67	.5150	.6009	1.664	.85717	
10	.3934	.4279	2.337	.91936	50	.5175	.6048	1.653	.85567	
20	.3961	.4314	2.318	.91822	40	.5200	.6088	1.643	.85416	
30	.3987	.4348	2.300	.91706	30	.5225	.6128	1.632	.85264	
40	.4014	.4383	2.282	.91590	20	.5250	.6168	1.621	.85112	
50	.4041	.4417	2.264	.91472	10	.5275	.6208	1.611	.84959	
				66					58	
	Cosin.	Cotg.	Tan.	Sine.	Angle.	Cosin.	Cotg.	Tan.	Sine.	Angle.

TABLE VIII.—NATURAL TRIGONOMETRICAL FUNCTIONS.

Angle	Sine.	Tan.	Cotg.	Cosin.		Angle	Sine.	Tan.	Cotg.	Cosin.	
°						°					
32	.5299	.6249	1.600	.84805	58	30	.6225	.7954	1.257	.78261	
10	.5324	.6289	1.590	.84650	50	40	.6248	.8002	1.250	.78079	
20	.5348	.6330	1.580	.84495	40	50	.6271	.8050	1.242	.77897	
30	.5373	.6371	1.570	.84339	30						
40	.5398	.6412	1.560	.84182	20	39	.6293	.8098	1.235	.77715	
50	.5422	.6453	1.550	.84025	10	10	.6316	.8146	1.228	.77531	
						20	.6338	.8195	1.220	.77347	
33	.5446	.6494	1.540	.83867	57	30	.6361	.8243	1.213	.77162	
10	.5471	.6536	1.530	.83708	50	40	.6383	.8292	1.206	.76977	
20	.5495	.6577	1.520	.83549	40	50	.6406	.8342	1.199	.76791	
30	.5519	.6619	1.511	.83389	30						
40	.5544	.6661	1.501	.83228	20	40	.6428	.8391	1.192	.76604	
50	.5568	.6703	1.492	.83066	10	10	.6450	.8441	1.185	.76417	
						20	.6472	.8491	1.178	.76229	
34	.5592	.6745	1.483	.82904	56	30	.6494	.8541	1.171	.76041	
10	.5616	.6787	1.473	.82741	50	40	.6517	.8591	1.164	.75851	
20	.5640	.6830	1.464	.82577	40	50	.6539	.8642	1.157	.75661	
30	.5664	.6873	1.455	.82413	30						
40	.5688	.6916	1.446	.82248	20	41	.6561	.8693	1.150	.75471	
50	.5712	.6959	1.437	.82082	10	10	.6583	.8744	1.144	.75280	
						20	.6604	.8796	1.137	.75088	
35	.5736	.7002	1.428	.81915	55	30	.6626	.8847	1.130	.74896	
10	.5760	.7046	1.419	.81748	50	40	.6648	.8899	1.124	.74703	
20	.5783	.7089	1.411	.81580	40	50	.6670	.8952	1.117	.74509	
30	.5807	.7133	1.402	.81412	30						
40	.5831	.7177	1.393	.81242	20	42	.6691	.9004	1.111	.74314	
50	.5854	.7221	1.385	.81072	10	10	.6713	.9057	1.104	.74120	
						20	.6734	.9110	1.098	.73924	
36	.5878	.7265	1.376	.80902	54	30	.6756	.9163	1.091	.73728	
10	.5901	.7310	1.368	.80730	50	40	.6777	.9217	1.085	.73531	
20	.5925	.7355	1.360	.80558	40	50	.6799	.9271	1.079	.73333	
30	.5948	.7400	1.351	.80386	30						
40	.5972	.7445	1.343	.80212	20	43	.6820	.9325	1.072	.73135	
50	.5995	.7490	1.335	.80038	10	10	.6841	.9380	1.066	.72937	
						20	.6862	.9435	1.060	.72737	
37	.6018	.7536	1.327	.79864	53	30	.6884	.9490	1.054	.72537	
10	.6041	.7581	1.319	.79688	50	40	.6905	.9545	1.048	.72337	
20	.6065	.7627	1.311	.79512	40	50	.6926	.9601	1.042	.72136	
30	.6088	.7673	1.303	.79335	30						
40	.6111	.7720	1.295	.79158	20	44	.6947	.9657	1.036	.71934	
50	.6134	.7766	1.288	.78980	10	10	.6967	.9713	1.030	.71732	
						20	.6988	.9770	1.024	.71529	
38	.6157	.7813	1.280	.78801	52	30	.7009	.9827	1.018	.71325	
10	.6180	.7860	1.272	.78622	50	40	.7030	.9884	1.012	.71121	
20	.6202	.7907	1.265	.78442	40	50	.7050	.9942	1.006	.70916	
							.7071	1.	1.	.70711	
										°	
	Cosin.	Cotg.	Tan.	Sine.	Angle.		Cosin.	Cotg.	Tan.	Sine.	Angle.

TABLE IX.—CALCULATION OF EARTHWORK.


Width	HEIGHT														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	.02	.04	.06	.07	.09	.11	.13	.15	.17	.18	.20	.22	.24	.26	.28
2	.04	.07	.11	.15	.18	.22	.26	.30	.33	.37	.41	.44	.48	.52	.56
3	.06	.11	.17	.22	.28	.33	.39	.44	.50	.56	.61	.67	.72	.78	.83
4	.07	.15	.22	.30	.37	.44	.52	.59	.67	.74	.81	.89	.96	1.04	1.11
5	.09	.19	.28	.37	.46	.56	.65	.74	.83	.93	1.02	1.11	1.20	1.30	1.39
6	.11	.22	.33	.44	.56	.67	.78	.89	1.00	1.11	1.22	1.33	1.44	1.55	1.67
7	.13	.26	.39	.52	.65	.78	.91	1.04	1.16	1.30	1.42	1.55	1.68	1.81	1.94
8	.15	.30	.44	.59	.74	.89	1.04	1.19	1.33	1.48	1.63	1.78	1.92	2.08	2.22
9	.17	.33	.50	.67	.83	1.00	1.17	1.33	1.50	1.67	1.83	2.00	2.17	2.33	2.50
10	.18	.37	.56	.74	.93	1.11	1.30	1.48	1.67	1.85	2.04	2.22	2.41	2.59	2.78
11	.20	.41	.61	.82	1.02	1.22	1.43	1.63	1.83	2.04	2.24	2.44	2.65	2.85	3.06
12	.22	.44	.67	.89	1.11	1.33	1.56	1.78	2.00	2.22	2.44	2.67	2.89	3.11	3.33
13	.24	.48	.72	.96	1.20	1.44	1.68	1.92	2.16	2.41	2.65	2.89	3.13	3.37	3.61
14	.26	.52	.78	1.04	1.30	1.55	1.81	2.08	2.33	2.59	2.85	3.11	3.37	3.63	3.89
15	.28	.56	.83	1.11	1.39	1.67	1.94	2.22	2.50	2.78	3.06	3.33	3.61	3.89	4.17
16	.30	.59	.89	1.18	1.48	1.78	2.07	2.37	2.67	2.96	3.26	3.56	3.85	4.15	4.44
17	.31	.63	.94	1.26	1.57	1.89	2.20	2.52	2.83	3.15	3.46	3.78	4.09	4.41	4.72
18	.33	.67	1.00	1.33	1.67	2.00	2.33	2.67	3.00	3.33	3.67	4.00	4.33	4.67	5.00
19	.35	.70	1.06	1.41	1.76	2.11	2.46	2.82	3.17	3.52	3.87	4.22	4.57	4.92	5.28
20	.37	.74	1.11	1.48	1.85	2.22	2.59	2.96	3.33	3.70	4.07	4.44	4.81	5.18	5.56
21	.39	.78	1.17	1.55	1.94	2.33	2.72	3.11	3.50	3.89	4.28	4.67	5.06	5.44	5.83
22	.41	.81	1.22	1.63	2.04	2.44	2.85	3.26	3.67	4.07	4.48	4.89	5.30	5.70	6.11
23	.43	.85	1.28	1.70	2.13	2.56	2.98	3.41	3.83	4.24	4.68	5.11	5.54	5.96	6.39
24	.44	.89	1.33	1.78	2.22	2.67	3.11	3.56	4.00	4.44	4.89	5.33	5.78	6.22	6.67
25	.46	.92	1.39	1.85	2.31	2.78	3.24	3.70	4.17	4.63	5.09	5.56	6.02	6.48	6.94
26	.48	.96	1.44	1.92	2.41	2.89	3.37	3.85	4.33	4.82	5.30	5.78	6.26	6.74	7.24
27	.50	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
28	.52	1.04	1.55	2.07	2.59	3.11	3.63	4.15	4.67	5.18	5.70	6.22	6.74	7.26	7.78
29	.54	1.07	1.61	2.15	2.68	3.22	3.76	4.30	4.83	5.37	5.91	6.44	6.98	7.52	8.06
30	.56	1.11	1.67	2.22	2.78	3.33	3.89	4.44	5.00	5.55	6.11	6.67	7.22	7.78	8.33
31	.57	1.15	1.72	2.30	2.87	3.44	4.02	4.59	5.17	5.74	6.32	6.89	7.46	8.04	8.61
32	.59	1.18	1.78	2.37	2.96	3.56	4.15	4.74	5.33	5.92	6.52	7.11	7.70	8.30	8.89
33	.61	1.22	1.83	2.44	3.05	3.67	4.28	4.89	5.50	6.11	6.72	7.33	7.94	8.55	9.17
34	.63	1.26	1.89	2.52	3.15	3.78	4.40	5.04	5.67	6.29	6.93	7.56	8.18	8.81	9.44
35	.65	1.30	1.94	2.59	3.24	3.89	4.53	5.18	5.83	6.48	7.13	7.78	8.42	9.08	9.72
36	.67	1.33	2.00	2.67	3.33	4.00	4.66	5.33	6.00	6.67	7.33	8.00	8.67	9.33	10.00
37	.68	1.37	2.06	2.74	3.42	4.11	4.79	5.48	6.17	6.85	7.54	8.22	8.91	9.59	10.28
38	.70	1.41	2.11	2.82	3.52	4.22	4.92	5.63	6.33	7.03	7.74	8.44	9.15	9.85	10.56
39	.72	1.44	2.17	2.89	3.61	4.33	5.05	5.78	6.50	7.22	7.95	8.67	9.39	10.11	10.83
40	.74	1.48	2.22	2.96	3.70	4.44	5.18	5.92	6.67	7.41	8.15	8.89	9.63	10.37	11.11


Table gives cu. yds. in 1 ft. of a triangle of given width and height. Corrections for tenths of width are one tenth the values found under each height considering the widths from 1 to 9 as tenths and similarly the corrections for tenths of height are one tenth the figures opposite width considering the heights from 1 to 9 as tenths. Thus if $w = 16.2$ and $h = 5.3$, cu. yds. $= 1.43 + .028 + .089 = 1.597$ cu. yds. or practically 160 cu. yds. per 100 ft. If w exceeds 40 ft., use one half and multiply result by 2, if both w and h are large use one half of each and multiply result by 4. Any cross-section may be divided into triangles by the following rule. To the triangle of the sum of the outside cuts (or fills) $= h$, and $\frac{1}{2}$ the roadbed $= w$, add the triangles formed by taking the distance out to each break in turn ($= w$'s) by the difference between the cuts (or fills) on each side of it ($= h$'s) always subtracting the outer from the inner.


DIAGRAM FOR OBTAINING HORIZONTAL AND VERTICAL DISTANCES FROM STADIA READINGS


Enter on the horizontal scale with the value of the stadia reading or interval times the stadia constant (usually taken as 100) and run vertically upward to intersection with line representing the vertical angle. The location of this point with reference to the dotted line marked "ONE," etc., gives the correction to be subtracted from the entering value and to which " $f+c$ " (usually about 1 ft.) must be added to obtain the Horizontal Distance. The reading on vertical scale plus about 0.1 ft. for each 5° of vertical angle [$=(f+c \text{ Sino})$] is the Vertical Distance.

© 1944 BY J.K.FINCH.

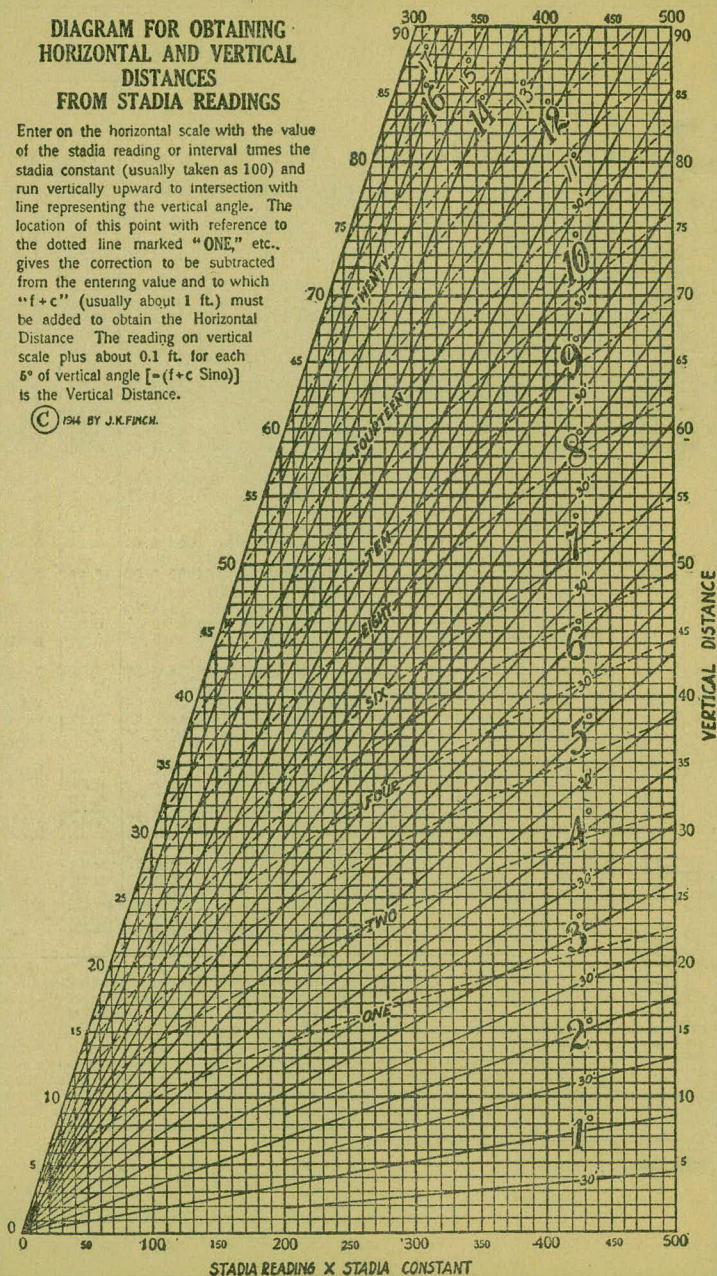

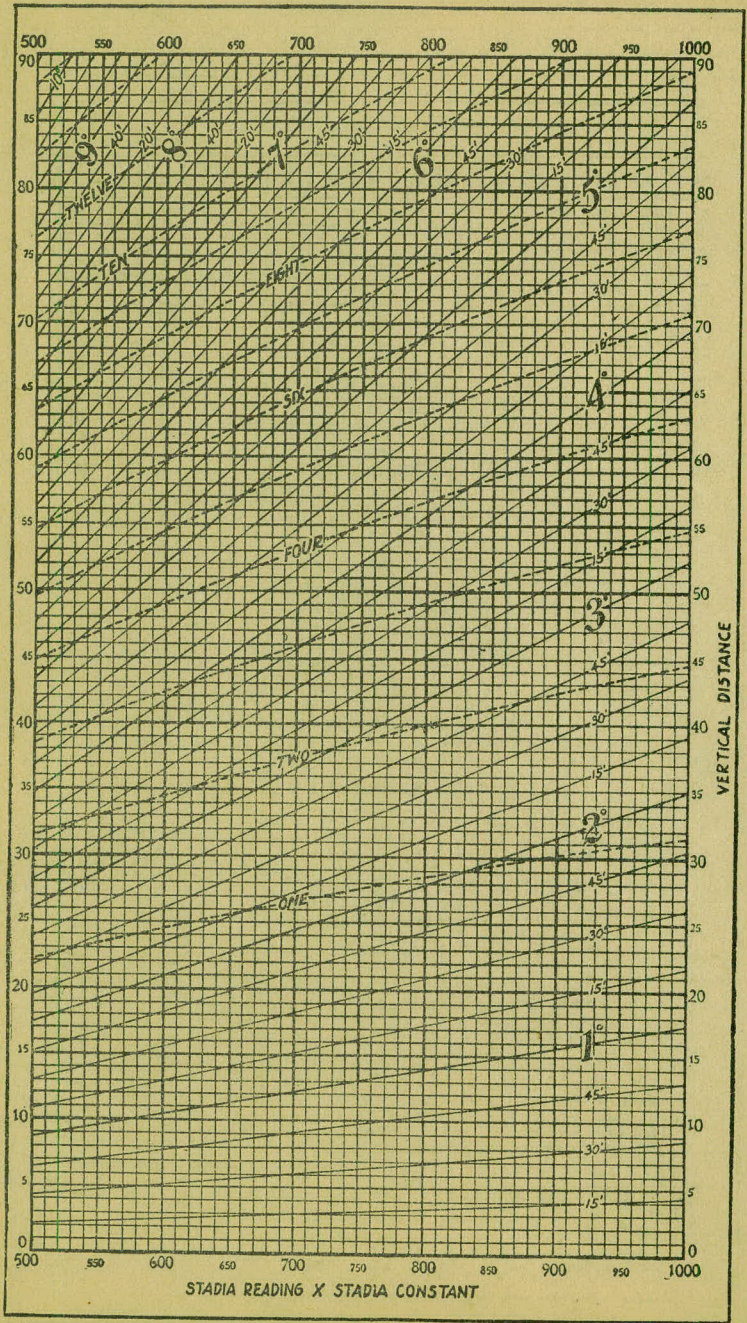

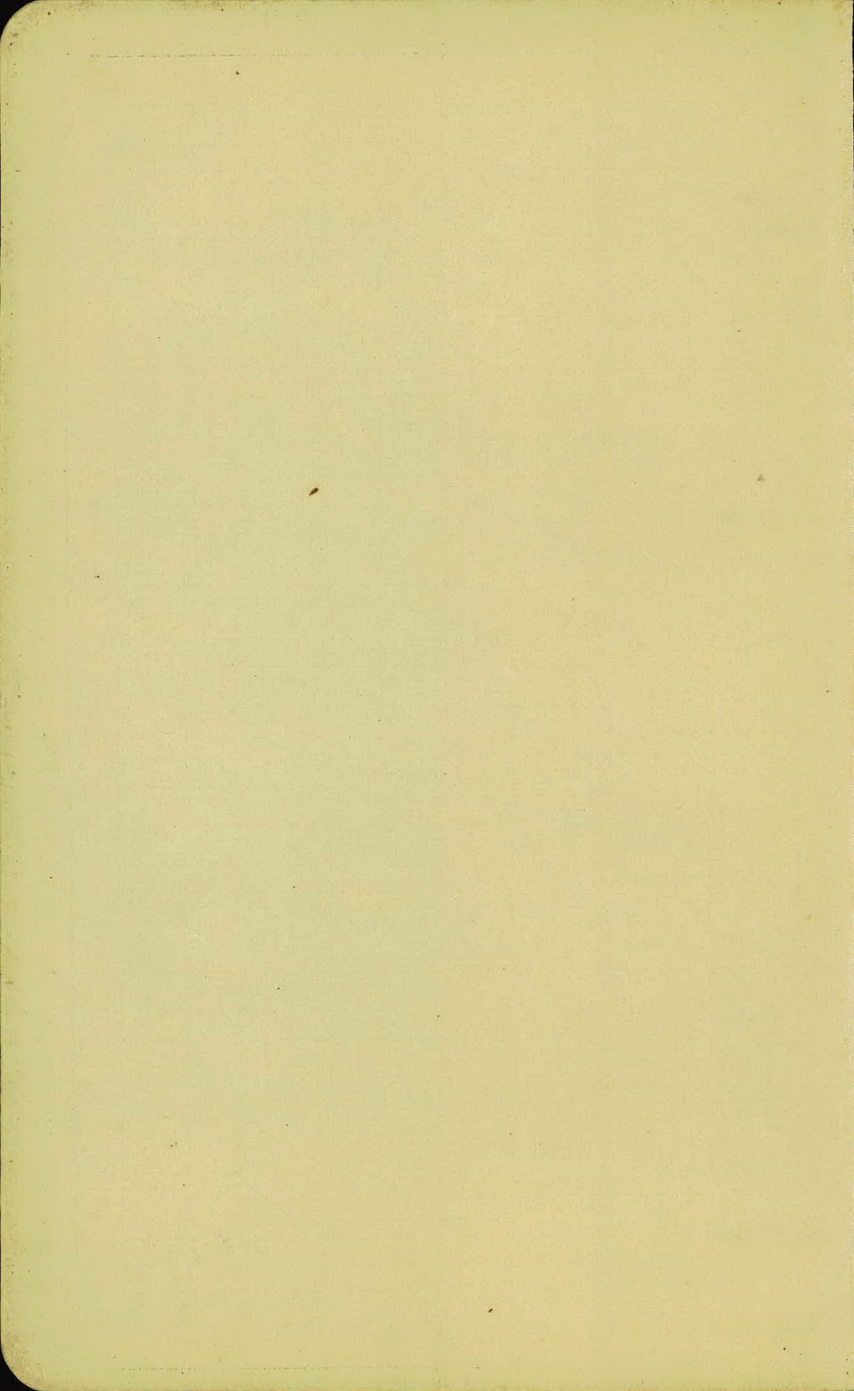

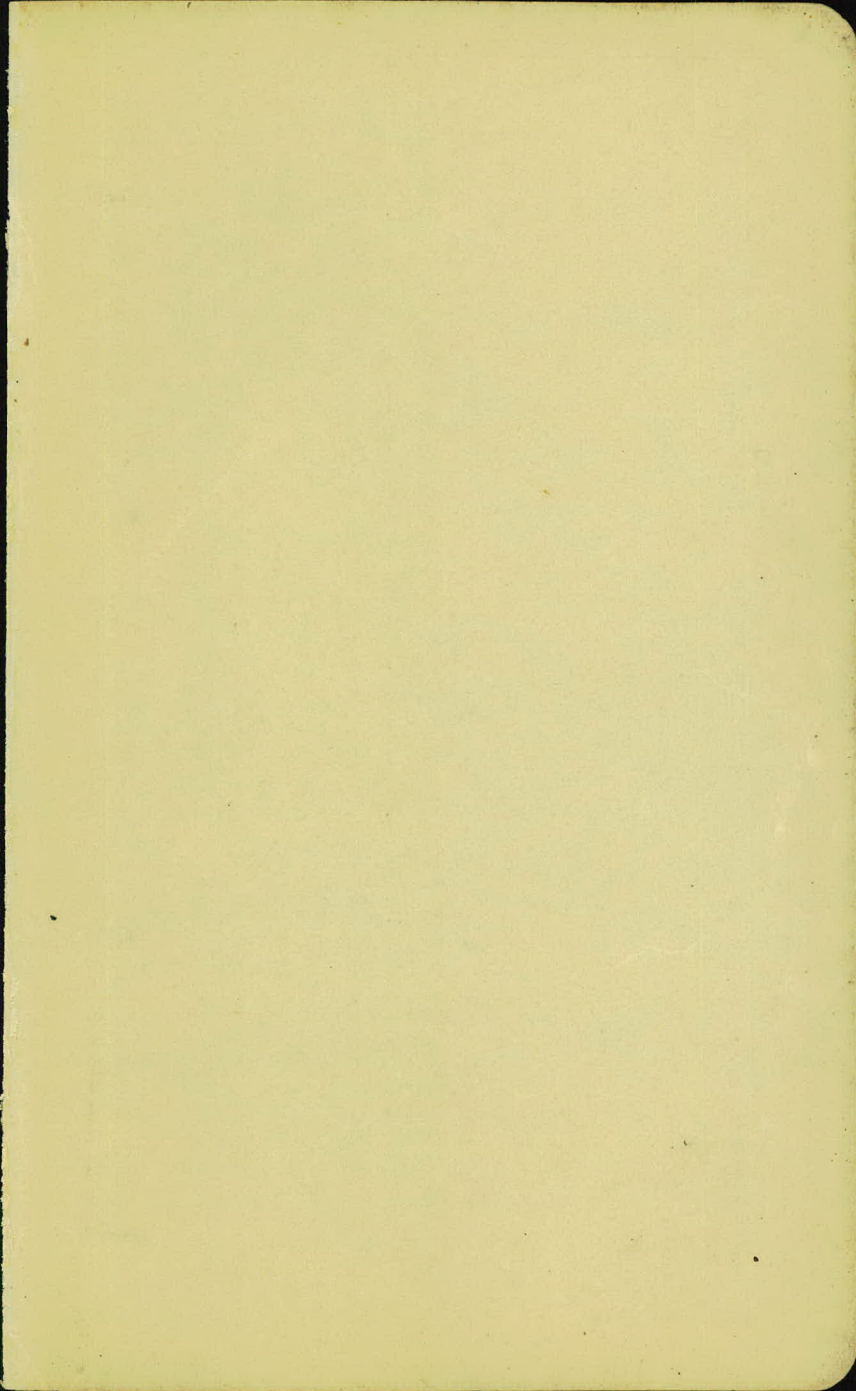

Sum 100 00 645 50 1137 104.30

306.09
 5.05
 311.13
 3.09
 308.04

1.05 11
 309.09 11
 12.50
 296.59
 2.98
 299.57

99.57
 6.35
 293.22

293.18
 6.35
 299.53
 7.90
 291.63
 1.89
 293.52
 6.90
 286.62
 2.02

268.64
 6.18
 280.46
 3.17
 283.63
 4.92
 278.69

275.90
 1.43
 274.47

302.41
 297.63
 496

268.58
 7.32
 275.90
 11.04
 286.94
 0.60
 286.34
 10.77
 297.11
 1.53
 295.58
 7.14
 302.72
 3.69
 9.08

275.90
 1.43
 274.47
 11.04
 285.51
 0.60
 284.91
 10.77
 295.68
 1.53
 294.15
 7.14
 301.29
 3.69
 297.60

02463

73-4-LT,

DISTANCES FROM CENTER OF ROADWAY FOR CROSS-SECTIONING.

Roadway 16 feet wide. Side Slopes 1 on 1½.
For Single Track Embankment.

H	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	H
0	8.0	8.2	8.3	8.5	8.6	8.8	8.9	9.1	9.2	9.4	0
1	9.5	9.7	9.8	10.0	10.1	10.3	10.4	10.6	10.7	10.9	1
2	11.0	11.2	11.3	11.5	11.6	11.8	11.9	12.1	12.2	12.4	2
3	12.5	12.7	12.8	13.0	13.1	13.3	13.4	13.6	13.7	13.9	3
4	14.0	14.2	14.3	14.5	14.6	14.8	14.9	15.1	15.2	15.4	4
5	15.5	15.7	15.8	16.0	16.1	16.3	16.4	16.6	16.7	16.9	5
6	17.0	17.2	17.3	17.5	17.6	17.8	17.9	18.1	18.2	18.4	6
7	18.5	18.7	18.8	19.0	19.1	19.3	19.4	19.6	19.7	19.9	7
8	20.0	20.2	20.3	20.5	20.6	20.8	20.9	21.1	21.2	21.4	8
9	21.5	21.7	21.8	22.0	22.1	22.3	22.4	22.6	22.7	22.9	9
10	23.0	23.2	23.3	23.5	23.6	23.8	23.9	24.1	24.2	24.4	10
11	24.5	24.7	24.8	25.0	25.1	25.3	25.4	25.6	25.7	25.9	11
12	26.0	26.2	26.3	26.5	26.6	26.8	26.9	27.1	27.2	27.4	12
13	27.5	27.7	27.8	28.0	28.1	28.3	28.4	28.6	28.7	28.9	13
14	29.0	29.2	29.3	29.5	29.6	29.8	29.9	30.1	30.2	30.4	14
15	30.5	30.7	30.8	31.0	31.1	31.3	31.4	31.6	31.7	31.9	15
16	32.0	32.2	32.3	32.5	32.6	32.8	32.9	33.1	33.2	33.4	16
17	33.5	33.7	33.8	34.0	34.1	34.3	34.4	34.6	34.7	34.9	17
18	35.0	35.2	35.3	35.5	35.6	35.8	35.9	36.1	36.2	36.4	18
19	36.5	36.7	36.8	37.0	37.1	37.3	37.4	37.6	37.7	37.9	19
20	38.0	38.2	38.3	38.5	38.6	38.8	38.9	39.1	39.2	39.4	20
21	39.5	39.7	39.8	40.0	40.1	40.3	40.4	40.6	40.7	40.9	21
22	41.0	41.2	41.3	41.5	41.6	41.8	41.9	42.1	42.2	42.4	22
23	42.5	42.7	42.8	43.0	43.1	43.3	43.4	43.6	43.7	43.9	23
24	44.0	44.2	44.3	44.5	44.6	44.8	44.9	45.1	45.2	45.4	24
25	45.5	45.7	45.8	46.0	46.1	46.3	46.4	46.6	46.7	46.9	25
26	47.0	47.2	47.3	47.5	47.6	47.8	47.9	48.1	48.2	48.4	26
27	48.5	48.7	48.8	49.0	49.1	49.3	49.4	49.6	49.7	49.9	27
28	50.0	50.2	50.3	50.5	50.6	50.8	50.9	51.1	51.2	51.4	28
29	51.5	51.7	51.8	52.0	52.1	52.3	52.4	52.6	52.7	52.9	29
30	53.0	53.2	53.3	53.5	53.6	53.8	53.9	54.1	54.2	54.4	30
31	54.5	54.7	54.8	55.0	55.1	55.3	55.4	55.6	55.7	55.9	31
32	56.0	56.2	56.3	56.5	56.6	56.8	56.9	57.1	57.2	57.4	32
33	57.5	57.7	57.8	58.0	58.1	58.3	58.4	58.6	58.7	58.9	33
34	59.0	59.2	59.3	59.5	59.6	59.8	59.9	60.1	60.2	60.4	34
35	60.5	60.7	60.8	61.0	61.1	61.3	61.4	61.6	61.7	61.9	35
36	62.0	62.2	62.3	62.5	62.6	62.8	62.9	63.1	63.2	63.4	36
37	63.5	63.7	63.8	64.0	64.1	64.3	64.4	64.6	64.7	64.9	37
38	65.0	65.2	65.3	65.5	65.6	65.8	65.9	66.1	66.2	66.4	38
39	66.5	66.7	66.8	67.0	67.1	67.3	67.4	67.6	67.7	67.9	39
40	68.0	68.2	68.3	68.5	68.6	68.8	68.9	69.1	69.2	69.4	40

Example—If point is 22.6 ft. above grade, how far should it be from center line to be a slope stake point? Ans. from Table 41.9. For same slopes but other widths of roadbed correct above figures by one-half difference in width of roadbed; thus in example above for 20 ft. roadbed distance will be $41.9 + (20 - 16) \div 2$ or 2 ft. added to 41.9 = 43.9. For slopes of 1 on 1 see inside of front cover.