

DITCH NO. 5

SP. 52-516-03

PLANT 5-279-01

FIELD NO.

1813



Standard Engineer's Field Book

Description

	Size	Rulings
No. 1307	$7\frac{1}{4} \times 4\frac{5}{8}$	"Level"
No. 1308	"	"Field"


Specify by Number, the Book desired

Made in U. S. A.

This book contains a superior 50% rag content paper having a high degree moisture resisting surface. Waterproof ink is used and it is sewed with Bing Enamel Waterproof Thread. The binding material is also waterproof.

Made in U. S. A.

BOORUM & PEASE COMPANY
BROOKLYN, N. Y.

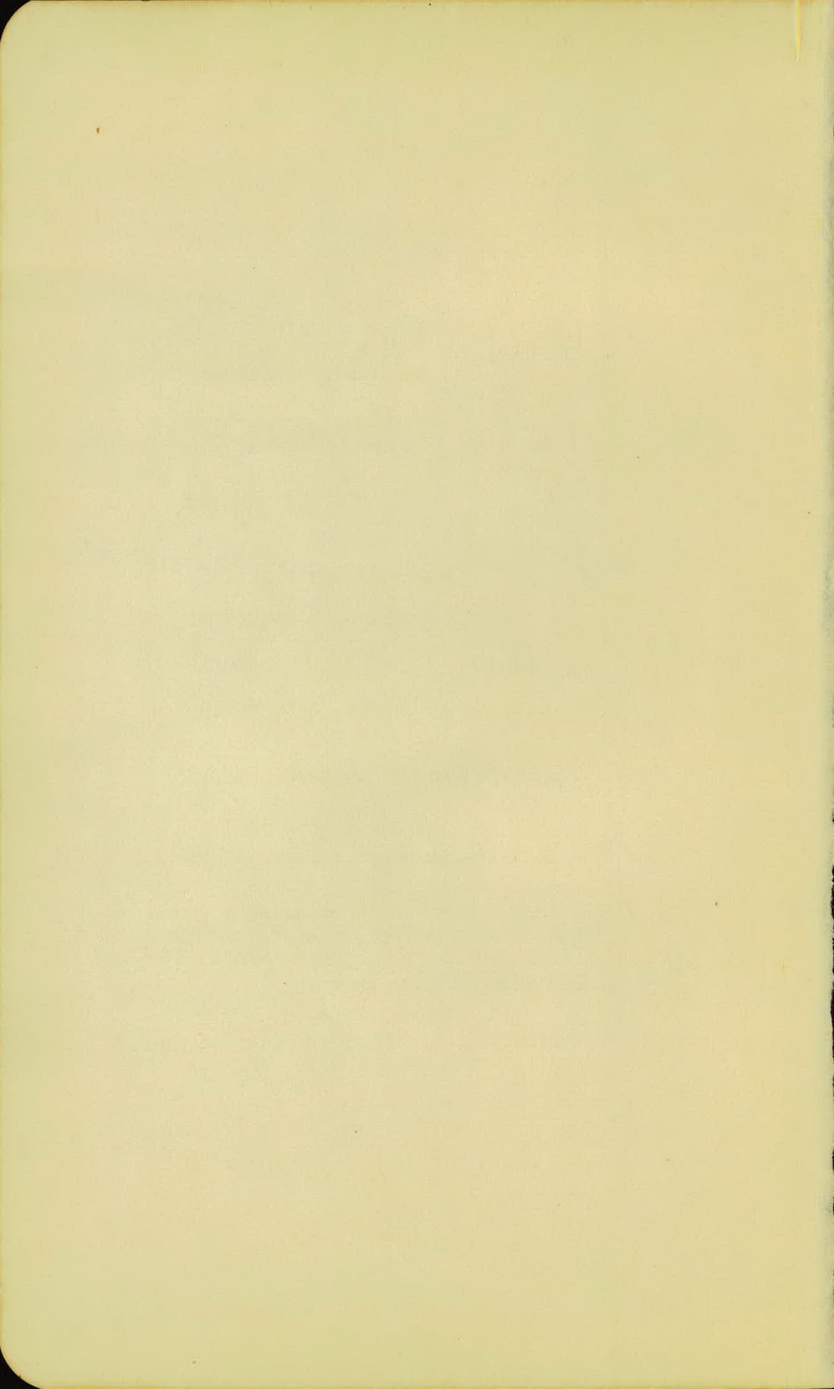

INDEX

Page

Grade stakes

Sta. 11+11.73 to 43+91.5

13-30

Grade stakes

Sta. 4 to 11+11.73

33-38

Grade stakes

Sta. 44+48.95 to 54+19.24

39-45

Grade stakes

Sta. 0+66 + Sta. 4

46-48



Grade Stakes

Sta	P.G	P.G.R
-----	-----	-------

B.M.		
------	--	--

0	+00	999.76
---	-----	--------

	+25	99.73
--	-----	-------

	+50	99.69
--	-----	-------

	+75	99.66
--	-----	-------

1		99.62
---	--	-------

	+25	99.59
--	-----	-------

	+50	99.55
--	-----	-------

	+75	99.52
--	-----	-------

7

sta.

P.G

P.G.C

2 99.48

+25 99.45

+50 99.41

+75 99.38

3 99.34

+25 99.30

+50 99.27

M.H. 1 = +64 99.25

3 +83 99.23

4 99.20

+25 99.17

+50 99.14

+75 99.10

5 99.07

+25 99.04

+50 99.01

5 +75 98.98

6 98.94

+25 98.90

+50 98.88

+75 98.85

7 98.81

+25 98.78

M.H.^{#2} +33 98.77

7 +50 9875

+75 9872

8 9868

+25 9865

+50 9862

+75 9859

9 9855

+25 98.52

Sta P.G. P.G.B

9 +50 98.49

+75 98.96

10 98.42

+25 98.39

+50 98.36

+75 98.33

11 98.29

B.M. 4.88 911.92

11 +11.73 98.28 13.64

90704

L

E

R

Spk. in P.P. # 120' on Cleveland Ave.

+5.9
7.74

13.64

sto	PG	PER		
		911.92		
11	+25	98.26	13.66	
	+50	98.23	13.69	
	+75	98.19	13.73	
12		98.16	13.76	
	+25	98.13	13.79	
	+50	98.10	13.82	
	+75	98.07	13.85	
B.M.		2.26	909.30	4.88
				(907.04)
13		98.03	11.27	

L

E

R

+8.1	
5.56	13.66

+9.44	
4.25	13.69

+8.8	
4.93	13.73

+5.8	
7.96	13.76

+5.60	
8.19	13.79

+5.4	
8.42	13.82

+5.0	
8.85	13.85

Spk. in RR #120 on Cleveland Ave

9-17-46

+5.2	
6.07	11.27
15' O.S.	

570	PG	PGR	
		909.30	

13	+25	98.00	11.30
----	-----	-------	-------

MH4	+50	97.97	11.33
-----	-----	-------	-------

	+75	97.94	11.36
--	-----	-------	-------

MH4	+90	97.92	11.40
-----	-----	-------	-------

14	+02	97.90	11.40
----	-----	-------	-------

	+25	97.87	11.43
--	-----	-------	-------

	+50	97.84	11.46
--	-----	-------	-------

	+75	97.80	11.50
--	-----	-------	-------

K.A.
A.M.
M.B.
C.F.

Clear + Windy
80°+

9-17-46

15

L

Q

R

+6.1
5.20 11.30

+6.70
4.63 11.33

+6.5
4.86 11.36

~~4.86~~

+7.0
4.40 11.40

+6.1
5.33 11.43

+5.8
5.66 11.46

+6.0
5.50 11.50
150.S.

Sta

PG

PER

909.30

15

97.77

11.53

+25

97.74

11.56

+50

97.71

11.59

+75

97.68

11.62

16

97.64

11.66

+25

97.61

11.69

+50

97.58

11.72

+75

97.55

11.75

L

E

E

+6.7

4.83 11.53

15'0.5.

+7.0

4.56 11.56

+7.6

3.99 11.59

+7.5

4.12 11.62

+7.8

3.86 11.66

+7.9

3.79 11.69

+7.3

4.42 11.72

+7.6

4.15 11.75

15'0.5.

Sta PG PGR

909.30

T.P
M.H.S

2.95

908.57

3.67+

905.63 checks

905.62

16 +8755 97.53 11.04

17

05.63

97.51

11.06

8.1

+25 97.48 11.09

+50 97.45 11.12

+75 97.42 11.15

10 97.38 11.19

+25 97.35 11.22

+50 97.32 11.25

9-13-46

K.A.
A.M.
M.B.
C.F.

cloudy + cool

L

E

R

11.77

Top Blue Top 15' rt. 16 + 8755

+7.7
3.34 11.04
20'0.5.

+8.1
2.94 11.04
15'0.5.



+7.5
3.56 11.06

+7.3
3.79 11.09

+7.0
4.12 11.12

+7.5
3.65 10.15

+7.9
3.29 11.19

+7.7
3.52 11.22

+7.5
3.85 11.35

sta.

PG

P.G.R

908.57

18 +75

97.29

11.28

B.M.

2.98

908.56

2.98

905.58

905.59

19

97.25

11.31

+25

97.22

11.34

+50

97.19

11.37

+75

97.16

11.40

20

97.12

11.44

+25

97.09

11.47

+50

97.06

11.50

+7.00
4.28 11.28

Spk. in E "H" pole Lt. Sta. 18+68

+6.7
4.61 11.31

+6.8
4.54 11.34

+6.8
4.57 11.37

+7.4
4.00 11.40

+7.1
4.34 11.44

+7.4
4.07 11.47

+7.40
4.10 11.50

Sta.

PG

PGE

908.56

20 +75

97.03

11.53

M.H. 6

+97

21

96.99

11.57

+25

96.96

11.60

+50

96.93

11.63

+75

96.90

11.66

T.P.

9.09

914.65

300

905.56

22

96.86

17.79

+25

96.83

17.82

L

E

F

+ 6.9
4.63 11.53

+ 7.1
4.47 11.57

08.56
96.82

11.73
23
9.0

+ 7.2
4.40 11.60

+ 7.4
4.23 11.63

9-13-46

+ 8.30
3.36 11.66

Top blue Top sta. 22

9-12-46

+ 8.7
9.09 17.79

+ 9.4
8.42 17.82

Sta.

PG

PGP

914.65

22 +50

96.80

17.85

+75

96.77

17.88

23

96.73

17.92

+25

96.70

17.95

914.65

+50

96.67

17.98

+75

96.64

18.01

24

96.60

18.05

+25

96.57

18.08

L

E

R

+10.4
7.45 17.85

+10.9
6.98 17.88

+11.1
6.82 17.92

+11.2
6.75 17.95

+11.6
6.38 17.98

+11.8
6.21 18.01

+11.7
6.35 18.05

+11.70
6.38 18.08

260.5.

Sta.	P.B.	P.G.R.
		914.65

~~24 125 96.54~~

+50	96.54	18.11
-----	-------	-------

+75	96.51	18.14
-----	-------	-------

B.M.	0.12	911.52	3.25	911.40
------	------	--------	------	--------

M.H. 7				
+86.3	96.49	15.03		

25	96.47	15.05
----	-------	-------

+25	96.44	15.08
-----	-------	-------

+50	96.41	15.11
-----	-------	-------

+75	96.38	15.14
-----	-------	-------

+11.9
 6.21 18.11
 20'0.5.

+12.50
 5.64 18.14

9-12-46

Spt. in RR. S.W. cor. Dicks St Co Rd "D"

+13.92
 1.11
 25'0.5.

+13.97 chks. profile cut.
 E = 1.06 ±

9-3-46

+13.2
 1.85

K.A.
 A.M.
 M.B.
 C.F.

+14.0
 1.08

+13.8
 1.31

18.24
 4.44
 +13.80

+13.8
 1.34

18.27
 4.4
 +13.87

18.31
 4.61
 +13.7

sto.	P.G	PGR
		911.52

26	96.34	1518
----	-------	------

+25	96.31	15.21
-----	-------	-------

+50	96.28	15.24
-----	-------	-------

+75	96.25	15.27
-----	-------	-------

27	96.21	15.31
----	-------	-------

+25	96.18	15.34
-----	-------	-------

+50	96.15	15.37
-----	-------	-------

+75	96.12	15.40
-----	-------	-------

+13.60
1.58
25'05.

+13.70
1.51 15.21

+13.90
1.34 15.24

+13.50
1.77 15.27

+13.40
1.91 15.31

+12.50
2.84 15.34

+12.40
2.97 15.37

+11.7
3.70 15.40

sta. PG PER

911.52

28 96.08 15.44

MAH^{#3}
+15

+25 96.05 15.47

+50 96.02 15.50

+75 95.99 15.53

29 95.95 15.57

+25 95.92 15.60

+50 95.89 15.63

+11.10
4.34 15.44
25'0.5.

+10.70
4.77 15.47

+10.30
5.20 15.50

+10.0
5.53 15.53

+9.70
5.87 15.57
25'0.5

+9.5
6.10 15.60
20'0.5.

+9.30
6.33 15.63

Sta.	P.G	PGR			
		911.52			
29	+75	95.86	15.66		
30		95.82	15.70		
	+25	95.79	15.73		
	+50	95.76	15.76		
	+75	95.73	15.79		
31		95.69	15.83		
B.M.		1.58	912.98		(911.40)
T.P.		3.22	907.76	844	904.54
	+25	95.66	12.10		
M.H 9					
	+42	95.64			

+9.2
6.46 15.66
20'0.3

+9.0
6.70 15.70

+8.4
7.33 15.73

+8.9
7.46 15.76

+8.2
7.59 15.79
20'0.3

+7.9
7.93 15.83
15'0.3

9-3-46

31 + 25 = 15.86 + 7.8 = 15.88
8.06 15.88

+50 = 15.89

+7.8
+75 = 15.92 + 8.10 = 15.90
ok chks A

Spk in P.P.S.W. Cor Ditch S + Cleveland Ave.

8-23-46

+7.7
4.40
05.15'

31 Ground E - El. 03.16
Profile Levels - El. 03.11

chks.

Sta.	P.G	PGR
		907.76

31	+50	95.63	12.13
----	-----	-------	-------

	+75	95.60	12.16
--	-----	-------	-------

32		95.56	12.20
----	--	-------	-------

	+25	95.53	12.23
--	-----	-------	-------

	+50	95.50	12.26
--	-----	-------	-------

	+75	95.47	12.29
--	-----	-------	-------

33		95.43	12.33
----	--	-------	-------

	+25	95.40	12.36
--	-----	-------	-------

8-23-46
K.A.
H.M.
M.B.
C.F.

L BLUE TOP
15' O.S.

Cloudy & Fair E

+7.8
4.33

+7.8
4.36

+8.0
4.20

+7.8
4.43

+7.6
4.66

+7.7
4.59

+7.6
4.73

+7.6
4.76

Sta	PG	PR
		907.76

33	+50	95.37	12.39
----	-----	-------	-------

	+75	95.34	12.42
--	-----	-------	-------

B.M.				897.66
------	--	--	--	--------

34		95.30	12.46
----	--	-------	-------

	+25	95.27	12.49
--	-----	-------	-------

	+50	95.24	12.52
--	-----	-------	-------

M.H 10			
	+70	95.21	

	+75	95.21	12.55
--	-----	-------	-------

B.M.		742	90508	10.10	897.66	897.66
------	--	-----	-------	-------	--------	--------

35		95.17	9.91
----	--	-------	------

+7.3
 5.09
 15' 0.5.

+7.4
 5.02

Top E of H.W. of old sewer Lt. sta. 36+90

+7.4
 5.06

+7.5
 4.99

+7.5
 5.02

+7.7
 4.85
 15' 0.5.

8-23-46

G.R. sta. 12.59
 4.78
 +7.81 checks

Top +E of H.W. of old sewer Lt. sta. 32+90

+7.80
 2.11
 10' 0.5.

+6.8 chks. profile
 ground of 3.1 levels.

Sta.	PG	PCR
------	----	-----

		905.08
--	--	--------

35	+25	95.14	9.94
----	-----	-------	------

	+50	95.11	9.97
--	-----	-------	------

	+75	95.08	10.0
--	-----	-------	------

36		95.04	10.04
----	--	-------	-------

	+25	95.01	10.07
--	-----	-------	-------

	+50	94.98	10.10
--	-----	-------	-------

	+75	94.95	10.13
--	-----	-------	-------

37		94.91	10.17
----	--	-------	-------

Cloudy & warm

Blue top
10' 05.

8-22-46
K.A.
A.M.
M.B.
C.F.

27

+7.8
2.14

+7.20
2.77

+6.9
3.10

+6.5
3.54

+6.1
3.97

+5.9
4.2

+6.1
4.03

+6.0
4.17

Sta. P.C. P.G.R.

90508

37 +25 9488 10.20

+50 9485 10.23

+75 9482 10.26

M.H. II

38 9478 10.30

B.M. 6.25 903.91 7.42 897.66

+25 9475 9.16

+50 9472 9.19

+75 9469 9.22

39 9465 9.26

Blue top
10' 05.

8-22-46

28

+58
4A0

+51
5.13

+49
5.36

+4.5
5.8

Top + @ of H.W. of old sewer Lt slo. 32+40

+4.0
5.16

cut slope 38:

5.25
G.K. = 9.13
4.61 clips
+4.52

8-27-46

+2.60
6.59

+2.00
7.26

sta.	P.G	P.G.R
------	-----	-------

		903.91
--	--	--------

39	+25	94.62	9.29
----	-----	-------	------

	+50	94.59	9.32
--	-----	-------	------

	+75	94.56	9.35
--	-----	-------	------

40		94.52	9.39
----	--	-------	------

	+25	94.49	9.42
--	-----	-------	------

	+50	94.46	9.45
--	-----	-------	------

	+75	94.43	9.48
--	-----	-------	------

T.P		12.99	910.12	6.76	897.13
-----	--	-------	--------	------	--------

41		94.39	15.73
----	--	-------	-------

Blue top
0.5. 10'

8-27-46

Rain wood

29

+2.00
7.29

+2.0
7.32

+2.00
7.35

+2.0
7.39

+2.0
7.42

+2.90
6.55

+2.7
6.78

+3.4
12.33

sto. P.G. PGR

9/10/12

41 +25 94.36 15.76

+50 94.33 15.79

+75 94.30 15.82

42 94.26 15.86

+25 94.23 15.89

M.H. 12

+27.95 94.23

42 +32.47

43 +72.75 } 94.22

+91.5 94.2 15.92 chks.

B.M.

11.03

899.09

(899.13)

Blue top

10' 0.5

8-27-46
Rain + cool

30

+3.20

12.56

+3.70

12.09

+4.9

10.92

+5.0

10.86


+3.2


12.69

^{stake}
M.H. set at 15' 0.5. at rt angles. +430 each stake.

1.54

Spk. in P.P. SW. Cor. Ditch at RR. track

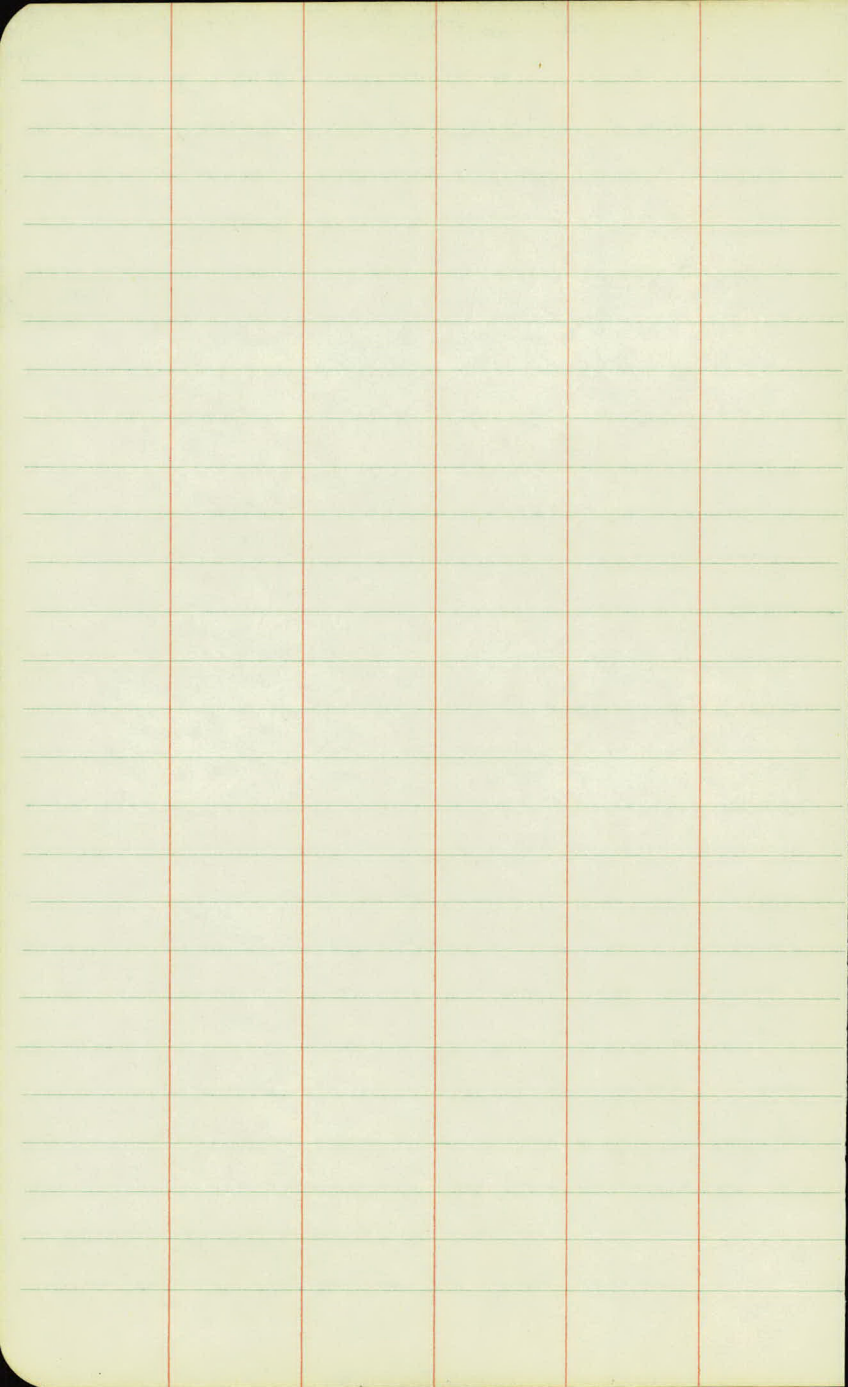

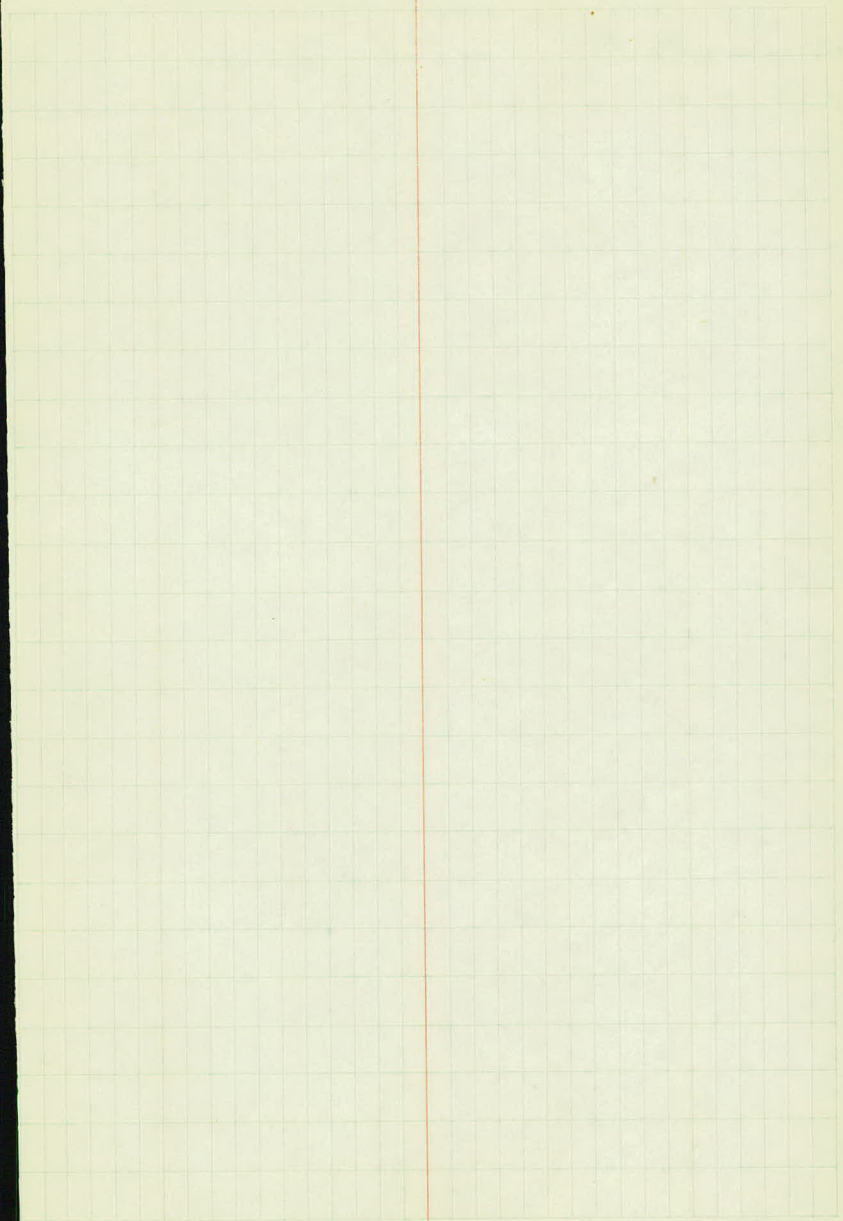

Sta.	P.G.	P.G.P.	
B.M.	0.22	910.90	910.68
0	+00	99.76	11.14 11.12
	+25	99.73	11.17 11.15
	+50	99.69	11.21 11.19
	+75	99.66	11.24
1		99.62	11.28
	+25	99.59	
	+50	99.55	
	+75	99.52	

1100

(Cleveland)
Top SW Cor. Lower step of Ho. rt 141+65

+3.4

7.74

11.19

+3.4

7.77

11.17

Sta

P.C.

P.C.B.

912.00
910.90

2

99.98

+25 99.95

+50 99.41

+75 99.38

12.62

3

99.34

12.66

+25 99.31

12.69

+50 99.27

12.73

B.M.

58

912.26

910.68

N

+60 99.25

13.01

1000

16.6
6.09 12.69

15.9
6.83 12.73

16.0
7.01
10' as.

Sta	P.G	P.C.R
-----	-----	-------

912.26

~~3 175 99.23 13.03~~

BM.	1.44	912.12		91068
4	99.20	12.92		

125 99.17 12.95 ✓

150 99.14 12.98 ✓

175 99.11 13.01

5 ^{194.7} 99.07 13.05

125 99.04 13.08

T.P. 5.24 913.28 4.08 90804

150 99.01 14.27

10-9-46

K.H.
A.M.
M.B.
C.F.

34

L

E

R

~~17.9~~

~~5.13~~

~~13.03~~

Top 5 W. Cor. Lower step of Ho. r.t. sto. 101145 (Cleveland)

+5.2

7.72

10' 0.5

12.92

+5.7

7.25

12.95

+5.70

7.28

12.98

+6.2

6.81

13.01

14.2
6.1
8.1

+8.1

4.95

13.05

+9.0

4.08

+9.4

4.87

14.27

Sta.	P.G	P.G.R
------	-----	-------

913.28

5	+75	98.98	14.30 ✓
---	-----	-------	---------

6		98.94	14.34 ✓
---	--	-------	---------

	+25	98.91	14.37 ✓
--	-----	-------	---------

	+50	98.88	14.40 ✓
--	-----	-------	---------

	+75	98.85	14.43 ✓
--	-----	-------	---------

7		98.81	14.47 ✓
---	--	-------	---------

	+25	98.78	14.50
--	-----	-------	-------

M.M.
+28

L

E

R

$$\begin{array}{r} 1.84 \\ \hline 917.42 \end{array}$$

$$\begin{array}{r} 10.0 \\ 4.90 \end{array} \quad 13.9$$

$$\begin{array}{r} +9.9 \\ 4.44 \end{array} \quad 14.59$$

$$\begin{array}{r} +9.8 \\ 4.57 \end{array} \quad 14.37$$

$$\begin{array}{r} 110.5 \\ 3.90 \end{array} \quad 14.90$$

$$\begin{array}{r} +10.4 \\ 4.03 \end{array} \quad 14.43$$

$$\begin{array}{r} +9.8 \\ 4.67 \end{array} \quad 14.47$$

$$\begin{array}{r} +9.7 \\ 4.80 \end{array} \quad 14.50$$

Sta	PG	PGF
		913.28

7	+50	9875	14.53
---	-----	------	-------

	+75	9872	14.56
--	-----	------	-------

B.M.	-0.02	911.38	1.85	911.40
------	-------	--------	------	--------

8		9868	12.70
---	--	------	-------

B.M.				911.4
------	--	--	--	-------

	+25	9865	12.73
--	-----	------	-------

	+50	9862	12.76
--	-----	------	-------

	+75	9859	12.79
--	-----	------	-------

9		9855	12.83
---	--	------	-------

	+25	9852	12.86
--	-----	------	-------

L

E

R

+9.6	
9.93	19.53
10'0.5.	

10-9-96

+9.7	
4.86	14.56

Spk in 16 Tw. Cott. rt. sta

10-2-96

10-2-96

19.6	+7.50
7.1	5.20
<u>7.1</u>	10'0.5.

7.1	
5.63	12.73

+6.4	
6.36	12.76

+6.00	
6.79	12.79

+5.0	
7.83	12.83

+5.0	
7.85	12.85
10'0.5.	

sto

PG

PER

911.38

9 +50 98.49 12.89

+75 98.46 12.92

10 98.42 12.95

+25 98.39 12.99

+50 98.36 13.02

+75 98.33 13.35

~~+92 98.30 13.38~~

11 98.29 13.09

K.H.
A.M.
M.B.
C.F.

10-2-46

37

L

E

R

+5.0
7.89 12.88
10.05.

+4.8
8.12 12.91

3.5

+5.0
7.95 12.96

+4.9
8.09 12.99

+4.6
8.42 13.02

+5.4
7.95 13.35

+4.4
8.69 13.09
10.05

Sta.

PE

PER

911.38

M.H. 3

11 711.73

98.28

13.10

B.M.

4.33


907.05

907.04

10-2-46 455 760 13.10
10:05.

Spt. in P.P. #120 on Cleveland Ave.

$$\begin{array}{r}
 98.28 \\
 \underline{5.5} \\
 90.3.18 \\
 \underline{3.5} \\
 907.28 \\
 \underline{8.36} \\
 8.92 \\
 \underline{4.32} \\
 4.60
 \end{array}$$

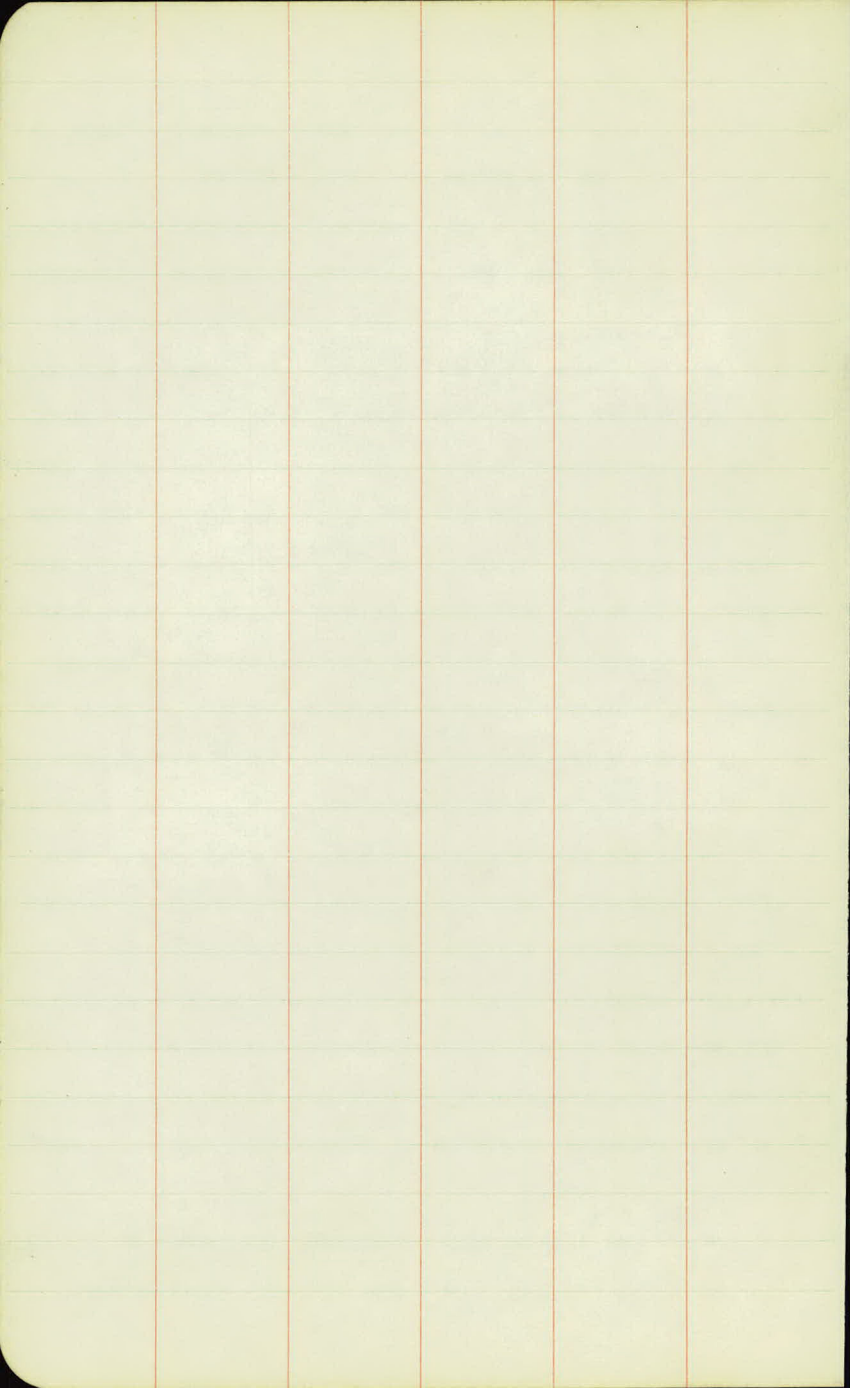

sta. 44+48.45 to 54+19.24

Sta	P.G	P.G.R	
BM.	664	905.47	898.83
44+4845	93.42	12.05	✓
+75	93.39	12.07	✓
45	93.37	12.10	✓
+25	93.35	12.12	✓
+50	93.32	12.15	✓
+75	93.30	12.17	✓
46	93.27	12.20	✓
+25	93.24	12.23	✓

L

E

E

Spt in 36" Cott. @ Pt. Sta 46-57

+4.1

7.95

10'0.5

12.05

+5.0

7.07

12.07

+5.7

6.40

12.10

+6.5

5.62

12.12

+6.7

5.45

12.15

+6.7

5.47

12.17

+6.9

5.30

12.20

+7.0

5.23

12.23

sta.	PG	PGR
		905.47

46	+50	93.22	12.25
----	-----	-------	-------

	+75	93.20	12.27
--	-----	-------	-------

M.H	+878	93.19	12.28
-----	------	-------	-------

47		93.17	12.30
----	--	-------	-------

	+25	93.15	12.32
--	-----	-------	-------

	+50	93.12	12.35
--	-----	-------	-------

	+75	93.10	12.37
--	-----	-------	-------

48		93.07	12.40
----	--	-------	-------

L

E

R

+6.4
5.85 12.25

+6.7
5.57 12.27

+7.5
4.78 12.28

+7.6
4.70 12.30

+7.8
4.52 12.32

+7.0
5.35 12.35

+5.6
6.77 12.37

+5.70
6.70 12.40

Sta	P.B	P.G.R
		905.47

48	+25	93.05	12.42
----	-----	-------	-------

	+50	93.02	12.45
--	-----	-------	-------

48	+75	93.00	12.47
----	-----	-------	-------

49	+50	92.97	12.50
----	-----	-------	-------

50	+26.73	92.94	12.53
----	--------	-------	-------

T.P.	7.12	906.06	6.53	898.94
------	------	--------	------	--------

	+50	92.92	13.14
--	-----	-------	-------

	+75	92.90	13.16
--	-----	-------	-------

50		92.87	13.19
----	--	-------	-------

L

E

F

$$\begin{array}{r}
 13.04 \\
 3.99 \\
 \hline
 7.10
 \end{array}$$

$$\begin{array}{r}
 +6.0 \\
 6.42 \\
 \hline
 12.42
 \end{array}$$

$$\begin{array}{r}
 +5.8 \\
 6.65 \\
 \hline
 12.45
 \end{array}$$

$$\begin{array}{r}
 +7.0 \\
 5.47 \\
 \hline
 12.47
 \end{array}$$

$$\begin{array}{r}
 +7.1 \\
 5.40 \\
 \hline
 12.5
 \end{array}$$

$$\begin{array}{r}
 +6.0 \\
 6.53 \\
 \hline
 12.53
 \end{array}$$

$$\begin{array}{r}
 +7.0 \\
 6.14 \\
 \hline
 13.14
 \end{array}$$

$$\begin{array}{r}
 +7.0 \\
 6.16 \\
 \hline
 13.16
 \end{array}$$

$$\begin{array}{r}
 +7.0 \\
 6.19 \\
 \hline
 13.19
 \end{array}$$

Sta.	P.G	P.G.R
		906.06

50	92.87	
---------------	------------------	--

+25	92.85	13.21
-----	-------	-------

+50	92.82	13.24
-----	-------	-------

+75	92.80	13.26
-----	-------	-------

51	92.77	13.29
----	-------	-------

B.M.	1.39	905.60	1.85	(904.21)
------	------	--------	------	----------

M.H.	+13.57	92.76	13.30
------	--------	-------	-------

+25	92.75	13.31
-----	-------	-------

+50	92.72	13.34
-----	-------	-------

K.A.
A.M.
M.B. L

9-30-46

43

E

R

174
581 13.21

16.5
6.74 13.24

19.3
8.96 13.26

15.5
7.79 13.29

Spt in 18" O. H. sta 5173

13.30 +9.5
380
20' O.S.

14.70
860 13.30
10' O.S.

13.31 +9.1
4.21

13.34 +8.8
4.54

sta.

P.G

P.G.R

906.06

51 +75

92.70

13.36

52

92.67

13.39

B.M.

1.39

905.60

1.85

904.21

904.21

13.41

+25

92.65

12.95

+50

92.62

12.98

905.60

+75

92.60

13.0

53

92.57

13.03

+25

92.55

13.05

+36.36 =

+37.15

} EQUA

92.54

+8.0
13.36 5.36

+6.6
13.39 6.79

Spt in 18" O. rt. slt. 51173

+5.4
7.55 12.95

9-27-46

+4.4
8.58 12.98

+5.1
7.9 13.0

+6.7
6.33 13.13

+6.2
6.85 13.05

20.05.

sta

P.G

P.G.R

905.60

53 +50 92.53 13.07

+69 13.09

~~+75 92.50 13.10~~

+83 13.11

54 92.47 13.13

+192A 92.45 13.15

↖ End of sewer


+7.50
5.57 13.07

+8.0
5.09 13.09

+7.4
5.71 13.11
20'05.

+6.3
6.83 13.13
10'05

+7.0
6.15 13.15
10'05.

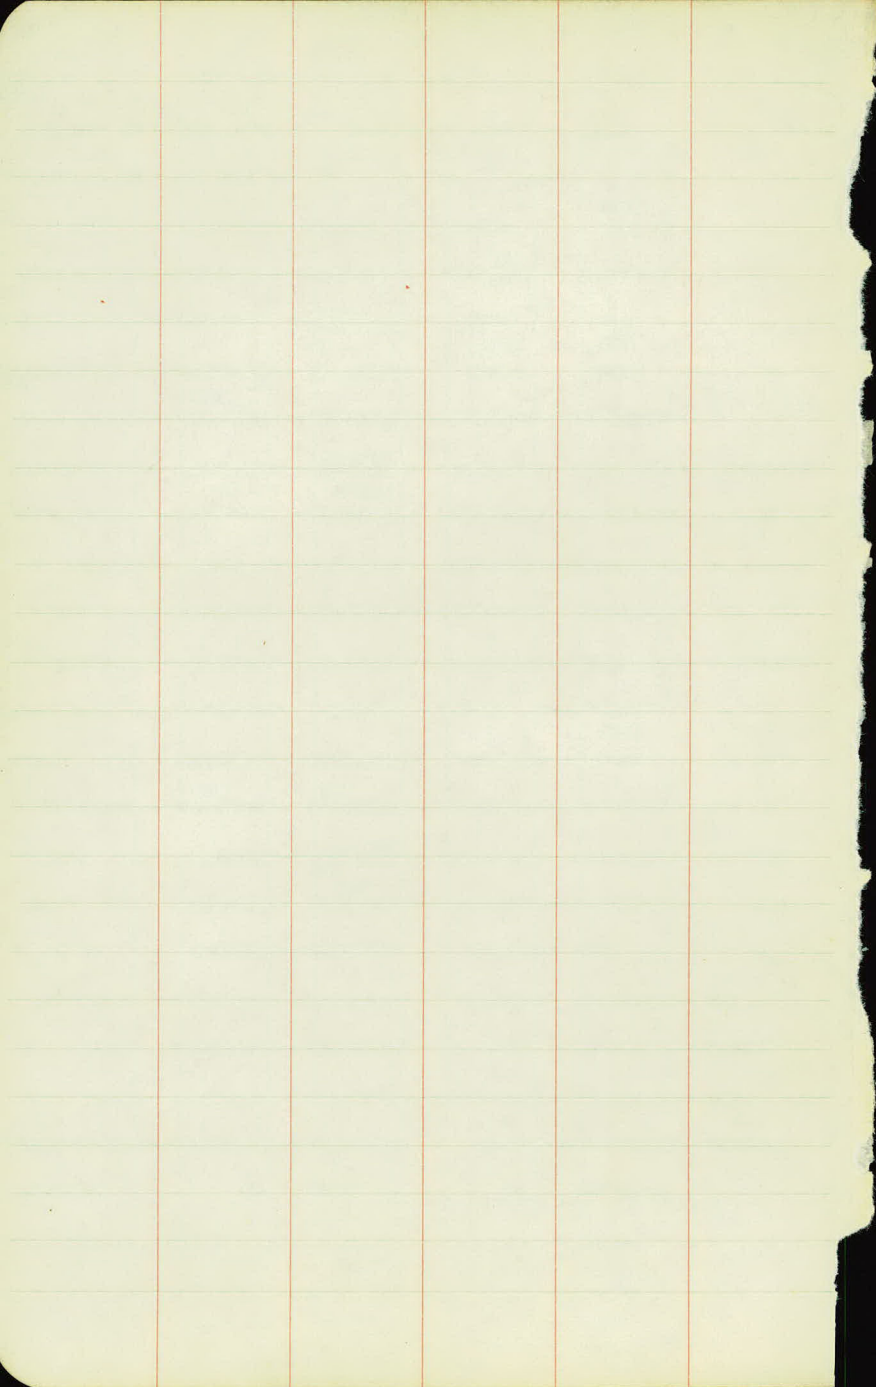

sta 0166 to sta 4100

Sta.	P.C.	P.E.R.	
B.M.	1.05	911.73	(91068)
0	⁶⁴ +54 99.67	12.06	
	+75 99.66	12.07	
1	99.62	12.11	
	+25 99.59	12.14	
	⁺⁴⁶ +30 99.55	12.18	
	+75 99.52	12.21	
2	99.48	12.25	
	+25 99.45	12.28	

~~St.~~ Top S.W. Cor. Lower Step of Ho. 14 (Cleveland) 14165

+5.0
7.06 12.06
20'0.5.

+5.6
6.47 12.07
10'0.5.

+6.2
5.91 12.11

+7.8
4.34 12.14

+7.3
4.88 12.18

+8.3
3.91 12.21

+9.5
2.75 12.25

+9.5
2.78 12.28

Sta.	PG	PCR
		911.79
2	+50	99.41
		12.32
	+75	99.39
		12.35
3		99.34
		12.39
	+25	99.31
		12.42
	+50	99.27
		12.46
		$\frac{5.9}{5.56}$
	+75	99.24
		12.49
		$\frac{7.6}{5.59}$
4	M.H. #1	99.20
		12.53
BM.		1.05
		910.68

$$\begin{array}{r} +9.3 \\ 3.02 \\ \hline 12.32 \end{array}$$

$$\begin{array}{r} +8.8 \\ \underline{4.55} \\ 3.55 \\ \hline 12.35 \end{array}$$


$$\begin{array}{r} +7.0 \\ 5.39 \\ \hline 12.39 \end{array}$$

$$\begin{array}{r} +7.0 \\ 5.42 \\ \hline 12.42 \end{array}$$

$$\begin{array}{r} +6.5 \\ 5.94 \\ \hline 12.46 \end{array}$$

$$\begin{array}{r} +7.9 \\ 4.59 \\ \hline 12.49 \end{array}$$

$$\begin{array}{r} +5.20 \\ 7.33 \\ 10.05 \\ \hline \end{array}$$

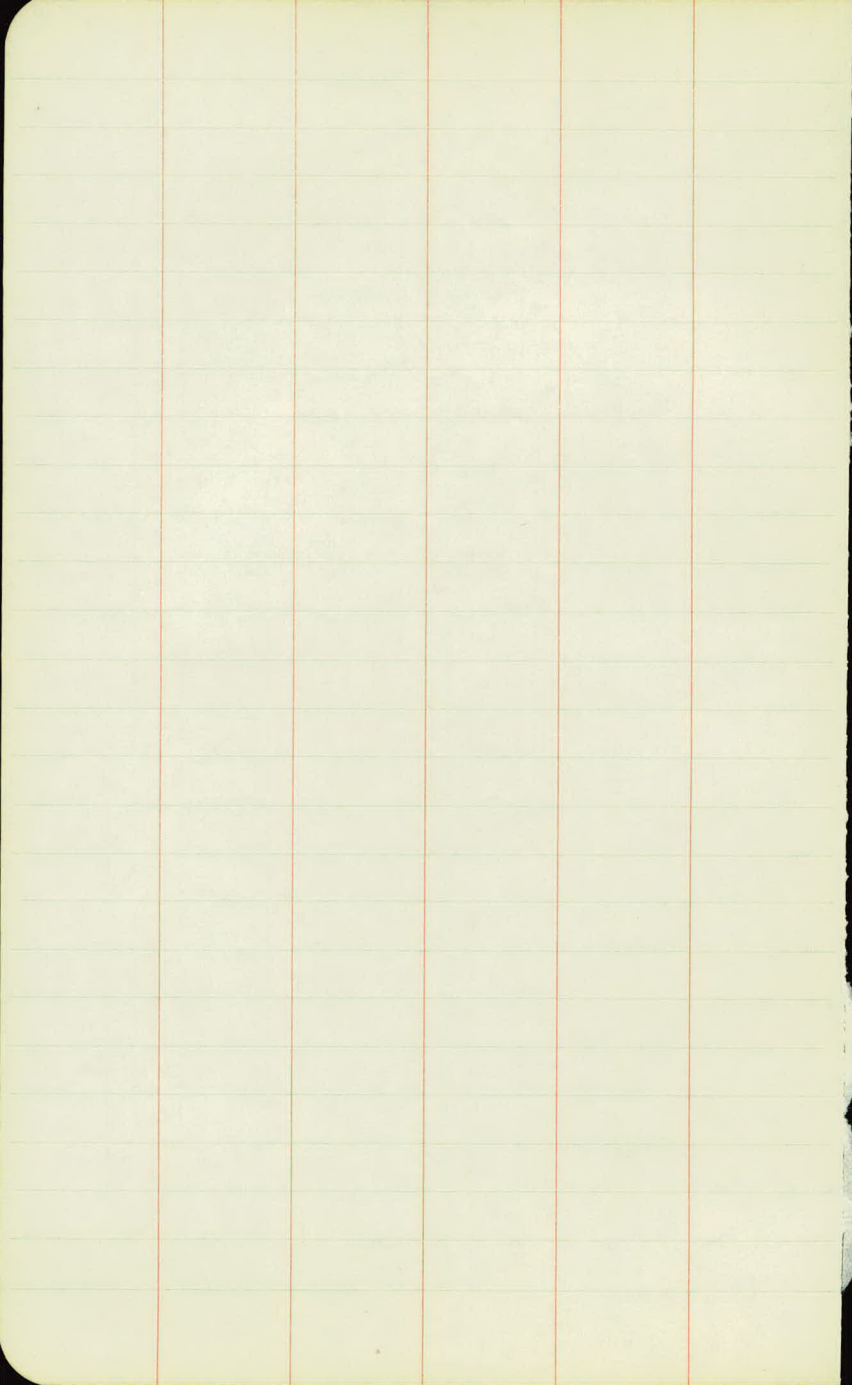


Relay 21" 1/2'

Sta	+	π	-	Elev
B.M	5.56	910.67		905.11
		P.G.		
0+00		896.47		
0+50		96.61		
1+00		96.75		
+50		96.89		
2		97.03		
+50		97.17		
3		97.31		
+50		97.45		

G. R.

C

1420 $\frac{8.2}{C.6.0}$ 1406 $\frac{6.0}{C.8.0}$ $\frac{5.92}{C.8.0}$ 1372 $\frac{3.92}{C.10.0}$ $\frac{4.78}{C.9.0}$ 1378 $\frac{2.78}{C.11.0}$ $\frac{4.64}{C.9.0}$ 1364 $\frac{3.64}{C.10.0}$ $\frac{5.50}{C.8.0}$ 1350 $\frac{4.50}{C.9.0}$ 1336 $\frac{5.36}{C.8.0}$ 1322 $\frac{7.22}{C.6.0}$

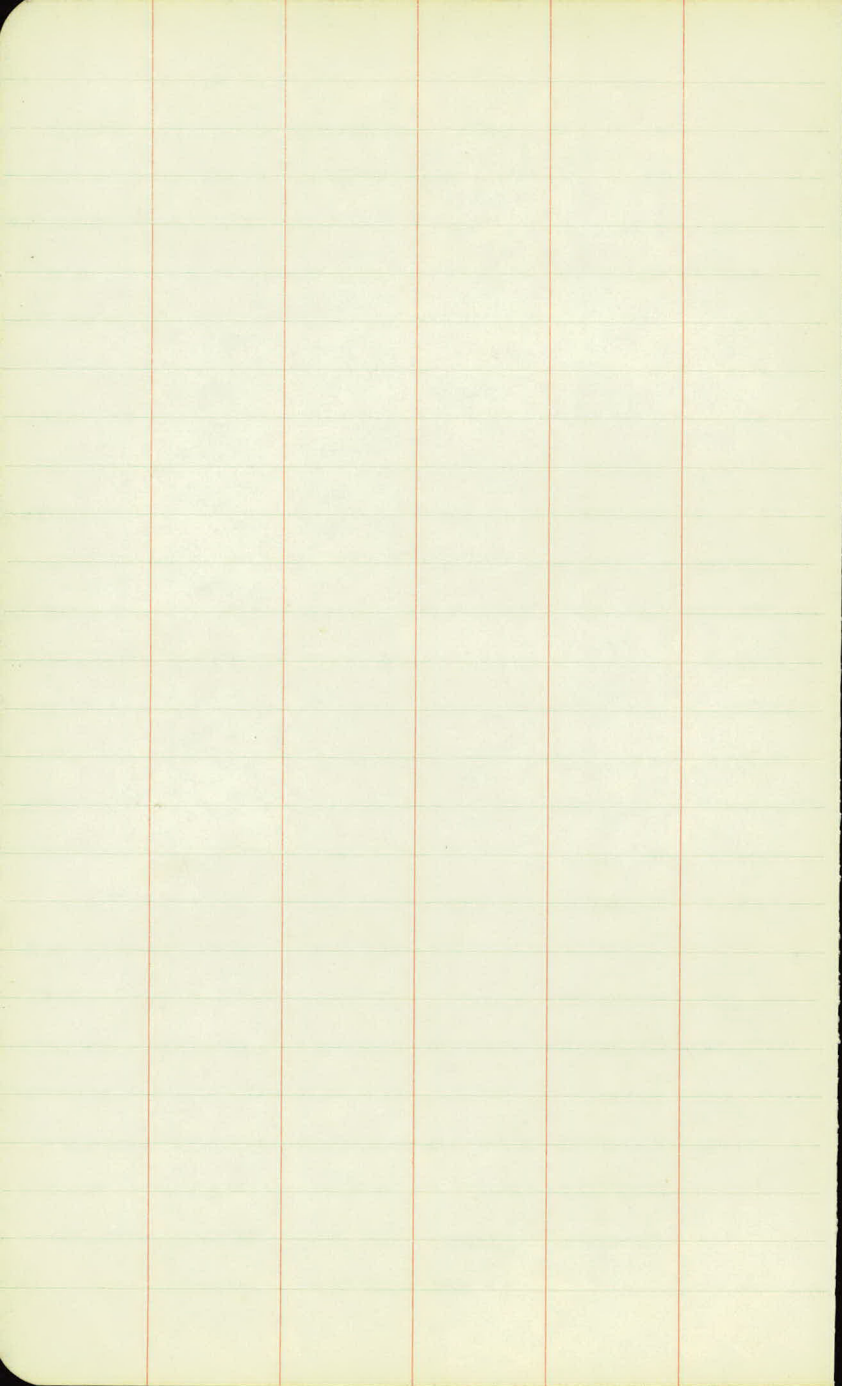

IMPROVED TABLES
AND
INFORMATION

DIRECTIONS FOR USE OF TABLES

TABLE No. 1.

Distance of slope stake from side or shoulder stake for any width roadway, slope $1\frac{1}{2}$ to 1. If ground is nearly level, the cut or fill at side stake is located by the double entry method in left column and top row. The number in body of table in same row and column gives distance from side stake to slope stake. If ground is not level estimate the difference in elevation between the side stake and slope stake, lower target by this amount if cut, elevate if fill. Add this amount to cut or fill and find distance in table. Set up rod at this point, and line of sight should cut target. If it does not make the slight adjustment necessary.


TABLE No. 9.

To find Tangent and External for curve of any other degree, divide by degree of curve and add correction found in column of corrections.

Degree of curve with a given I may be found by dividing tangent, (or external), opposite I by given tangent, (or external).

The distance from a point on the tangent to the curve is very nearly the square of the tangent length divided by twice the radius.

$7+33$
 $2 \overline{) 669}$
 3345
 0664
 $3+985$



364
 728

TABLE II
TRIGONOMETRIC FORMULÆ.

$\angle A = \angle MOP$ $\angle B = \angle PON = \angle OPL$

$R = OB = c = 1$

$\sin A = \frac{a}{c} = \frac{a}{1} = a = \cos B = LP$

$\cos A = \frac{b}{c} = \frac{b}{1} = b = \sin B = OL$

$\tan A = \frac{a}{b} = \frac{MQ}{OM} = \frac{MQ}{1} = MQ = \cot B = MQ$

$\cot A = \frac{NT}{ON} = \frac{NT}{1} = NT = \tan B = NT$

$\sec A = \frac{OQ}{OM} = \frac{OQ}{1} = OQ = \csc B = OQ$

$\csc A = \frac{OT}{ON} = \frac{OT}{1} = OT = \sec B = OT$

$\text{vers } A = \frac{LM}{OP} = LM = \text{covers } B \#$

$\text{covers } A = \frac{OP - LP}{OP} = OP - LP = \text{vers } B$

$\text{exsec } A = PQ = \text{coexsec } B$

$\text{coexsec } A = PT = \text{exsec } B$

$\sin \frac{1}{2} A = \sqrt{\frac{1 - \cos A}{2}}$ $\cos \frac{1}{2} A = \sqrt{\frac{1 + \cos A}{2}}$

$\sin 2A = 2 \sin A \cos A$ $\cos 2A = \cos^2 A - \sin^2 A$

Law of Lines $\frac{\sin A}{a} = \frac{\sin B}{B} = \frac{\sin C}{C}$

Law of Cosines $c^2 = a^2 + b^2 - 2ab \cos C$

Law of Tangents $\frac{a+b}{a-b} = \frac{\tan \frac{1}{2}(A+B)}{\tan \frac{1}{2}(A-B)}$

$3+64$
 32
 $3+96$

$7+33$
 66
 $2 \overline{) 667}$
 $333 \frac{1}{3}$
 066
 $3+99 \frac{1}{3}$
 $3133 \frac{1}{3}$
 $7+32 \frac{2}{3}$

TABLE II—Continued
TRIGONOMETRIC FORMULAE (continued)

In any triangle:

Given a, b, C; to find c, B, A.

Use Law of Lines.

Given A, B, c; to find a, b, C.

Use Law of Lines.

Given a, b, c; to find A, B, C.

$$\text{Let } \frac{a+b+c}{2} = s, \sqrt{\frac{(s-a)(s-b)(s-c)}{s}} = r$$

$$\cos \frac{1}{2} A = \sqrt{\frac{s(s-a)}{bc}}$$

$$\tan \frac{1}{2} A = \frac{r}{s-a}$$

$$\tan \frac{1}{2} B = \frac{r}{s-b}$$

$$\tan \frac{1}{2} C = \frac{r}{s-c}$$

Area of a triangle:

$$\text{Area} = \frac{1}{2} ab \sin C$$

$$\text{Area} = \sqrt{s(s-a)(s-b)(s-c)}$$

PRISMOIDAL FORMULA.

$$\text{Vol.} = \frac{h}{6} (B+b+4M)$$

h = altitude; b, B = bases; M = midsection

TABLE III
INCHES AND FRACTIONS OF AN INCH IN DECIMALS OF A FOOT

	0	1	2	3	4	5	6	7	8	9	10	11	
$\frac{1}{16}$.0052	.0885	.1719	.2552	.3385	.4219	.5052	.5885	.6719	.7552	.8385	.9219	$\frac{1}{16}$
$\frac{1}{8}$.0104	.0938	.1771	.2604	.3438	.4271	.5104	.5938	.6771	.7604	.8438	.9271	$\frac{1}{8}$
$\frac{3}{16}$.0156	.0990	.1823	.2656	.3490	.4323	.5156	.5990	.6823	.7656	.8490	.9323	$\frac{3}{16}$
$\frac{1}{4}$.0208	.1042	.1875	.2708	.3542	.4375	.5208	.6042	.6875	.7708	.8542	.9375	$\frac{1}{4}$
$\frac{5}{16}$.0260	.1094	.1927	.2760	.3594	.4427	.5260	.6094	.6927	.7760	.8594	.9427	$\frac{5}{16}$
$\frac{3}{8}$.0313	.1146	.1979	.2813	.3646	.4479	.5313	.6146	.6979	.7813	.8646	.9479	$\frac{3}{8}$
$\frac{7}{16}$.0365	.1198	.2031	.2865	.3698	.4531	.5365	.6198	.7031	.7865	.8698	.9531	$\frac{7}{16}$
$\frac{1}{2}$.0417	.1250	.2083	.2917	.3750	.4583	.5417	.6250	.7083	.7917	.8750	.9583	$\frac{1}{2}$
$\frac{9}{16}$.0469	.1302	.2135	.2969	.3803	.4635	.5469	.6302	.7135	.7969	.8802	.9635	$\frac{9}{16}$
$\frac{5}{8}$.0521	.1354	.2188	.3021	.3854	.4688	.5521	.6354	.7188	.8021	.8854	.9688	$\frac{5}{8}$
$\frac{11}{16}$.0573	.1406	.2240	.3073	.3906	.4740	.5573	.6406	.7240	.8073	.8906	.9740	$\frac{11}{16}$
$\frac{3}{4}$.0625	.1458	.2292	.3125	.3958	.4792	.5625	.6458	.7292	.8125	.8958	.9792	$\frac{3}{4}$
$\frac{13}{16}$.0677	.1510	.2344	.3177	.4010	.4844	.5677	.6510	.7344	.8177	.9010	.9844	$\frac{13}{16}$
$\frac{7}{8}$.0729	.1563	.2396	.3229	.4063	.4896	.5729	.6563	.7396	.8229	.9063	.9896	$\frac{7}{8}$
$\frac{15}{16}$.0781	.1615	.2448	.3281	.4115	.4948	.5781	.6615	.7448	.8281	.9115	.9948	$\frac{15}{16}$
1	.0833	.1667	.2500	.3333	.4167	.5000	.5833	.6667	.7500	.8333	.9167	1.0000	1
	0	1	2	3	4	5	6	7	8	9	10	11	

TABLE IV
USEFUL RELATIONS.

Lineal feet	×.00019	= miles
Lineal yards	×.0006	= miles
Square inches	×.007	= square feet
Square feet	×.111	= square yards
Square yards	×.0002067	= acres
Acres	×4840	= square yards
Cubic inches	×.00058	= cubic feet
Cubic feet	×.03704	= cubic yards
Links	×.22	= yards
Links	×.66	= feet
Feet	×1.5	= links

$360^\circ = 21600' = 1296000''$

Radius = arc of 57.2957790°

Arc of 1° (radius = 1) = .017453292

Arc of $1'$ (radius = 1) = .000290888

Arc of $1''$ (radius = 1) = .000004848

$\pi = 3.141592654$ $\sqrt{\frac{1}{\pi}} = 0.564190$

$\frac{\pi}{4} = 0.785398163$ $\sqrt[3]{\frac{6}{\pi}} = 1.240700982$

$\frac{\pi}{6} = 0.523598776$ $\pi^2 = 9.869604401$

$\sqrt{\frac{4}{\pi}} = 1.128379167$ $\frac{1}{\pi^2} = 0.101321184$

$\frac{\pi}{6} = 0.523598776$ $\sqrt{\pi} = 1.772453851$

$\frac{4\pi}{3} = 4.188790205$ $\frac{1}{\pi} = 0.3183099$

Curvature of Earth's surface = about 0.7 feet in 1 mile

Curvature in feet = 0.667 (Dist. in miles)²

Difference between arc and chord length, 0.05 feet in $11\frac{1}{2}$ miles

Probable error of a single observation = $0.6754 \sqrt{\frac{Mv^2}{n-1}}$

Error in chaining of 0.01 feet in 100 feet:

Due to—

1. Length of tape error of 0.01 feet
2. Alignment. One end 1.4 feet out of line
3. Sag of tape at centre of 0.61 feet.
4. Temperature difference of 15°
5. Difference of pull of 15 lbs.

STADIA REDUCTION FORMULÆ.

Horizontal Distance = $R - R \sin^2 a + C \cos a$

Vertical Distance = $R \frac{1}{2} \sin 2a + C \sin a$

$R = \text{Reading} \times \frac{\text{distance from Object glass to cross hairs}}{\text{distance between cross hairs}}$

C = distance from Object glass to cross hairs + distance from Object glass to center of instrument.

a = angle of elevation for mid Reading

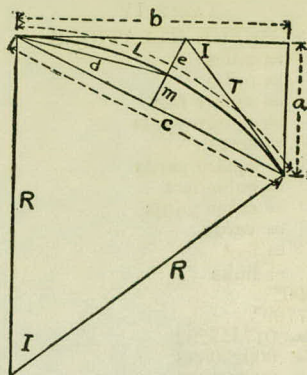


TABLE V
 CURVE FORMULAE FOR SIMPLE CURVES
 COMPILED BY J. CALVIN LOCKE, C.E.

- (1) $c = \sqrt{2Ra}$ (2) $c = \sqrt{a^2 + b^2}$
 (3) $c = \sqrt{2R(R - \sqrt{(R+b)(R-b)})} = \sqrt{2R(R - \sqrt{R^2 - b^2})}$
 (4) $c = 2\sqrt{m(2R - m)}$
 (5) $c = 2R \sin \frac{1}{2} I$ (6) $c = 2T \cos \frac{1}{2} I$
 (7) $e = R \operatorname{exsec} \frac{1}{2} I$
 (8) $e = R \tan \frac{1}{2} I \tan \frac{1}{4} I$ (9) $e = T \tan \frac{1}{4} I$
 (10) $b = \sqrt{a(2R - a)}$
 (11) $b = \sqrt{\left(c + \frac{c^2}{2R}\right)\left(c - \frac{c^2}{2R}\right)} = \sqrt{c^2 - \frac{c^4}{4R^2}}$
 (12) $b = R \sin I$ (13) $b = a \cot \frac{1}{2} I$
 (14) $R = \frac{a^2 + b^2}{2a} = \frac{c^2}{2a}$ (15) $R = \frac{d^2}{2m} = \frac{c^2 + 4m^2}{8m}$
 (16) $d = \sqrt{R(2R - \sqrt{(2R+c)(2R-c)})} = \sqrt{R(2R - \sqrt{4R^2 - c^2})}$
 (17) $d = \sqrt{2Rm}$ (18) $d = 2R \sin \frac{1}{4} I$ (19) $m = \frac{d^2}{2R}$
 (20) $m = R \mp \sqrt{\left(R + \frac{c}{2}\right)\left(R - \frac{c}{2}\right)} = R \mp \sqrt{R^2 - \frac{c^2}{4}}$
 (21) $m = R \operatorname{vers} \frac{1}{2} I$ (22) $m = R \sin \frac{1}{2} I \tan \frac{1}{4} I$ (23) $m = \frac{1}{2} c \tan \frac{1}{4} I$
 (24) $a = \frac{c^2}{2R}$ (25) $a = R - \sqrt{(R+b)(R-b)} = R - \sqrt{R^2 - b^2}$
 (26) $a = 2R(\sin^2 \frac{1}{2} I)^2$ (27) $a = R \operatorname{vers} I$ (28) $a = R \sin I \tan \frac{1}{2} I$
 (29) $a = b \tan \frac{1}{2} I$ (30) $a = T \sin I$ (31) $T = R \tan \frac{1}{2} I$
 (32) $I = \frac{L}{R} \times 57.295780$ (33) $R = \frac{L}{I} \times 57.295780$
 (34) $L = IR \times 0.01745329$ (35) $L = \frac{8d - c}{3}$
 (36) $\text{Area Seg.} = \frac{LR - R^2 \sin I}{2} = \frac{LR - Rb}{2}$

TABLE VII
RODS IN FEET AND INCHES

Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches
1	16-6	21	346-6	41	676-6	61	1006-6	81	1336-6
2	33-0	22	363-0	42	693-0	62	1023-0	82	1353-0
3	49-6	23	379-6	43	709-6	63	1039-6	83	1369-6
4	66-0	24	396-0	44	726-0	64	1056-0	84	1386-0
5	82-6	25	412-6	45	742-6	65	1072-6	85	1402-6
6	99-0	26	429-0	46	759-0	66	1089-0	86	1419-0
7	115-6	27	445-6	47	775-6	67	1105-6	87	1435-6
8	132-0	28	462-0	48	792-0	68	1122-0	88	1452-0
9	148-6	29	478-6	49	808-6	69	1138-6	89	1468-6
10	165-0	30	495-0	50	825-0	70	1155-0	90	1485-0
11	181-6	31	511-6	51	841-6	71	1171-6	91	1501-6
12	198-0	32	528-0	52	858-0	72	1188-0	92	1518-0
13	214-6	33	544-6	53	874-6	73	1204-6	93	1534-6
14	231-0	34	561-0	54	891-0	74	1221-0	94	1551-0
15	247-6	35	577-6	55	907-6	75	1237-6	95	1567-6
16	264-0	36	594-0	56	924-0	76	1254-0	96	1584-0
17	280-6	37	610-6	57	940-6	77	1270-6	97	1600-6
18	297-0	38	627-0	58	957-0	78	1287-0	98	1617-0
19	313-6	39	643-6	59	973-6	79	1303-6	99	1633-6
20	330-0	40	660-0	60	990-0	80	1320-0	100	1650-0

TABLE VIII
LINKS IN FEET AND INCHES

Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches
1	0- 7.92	18	11-10.56	35	23- 1.20	52	34- 3.84	69	45- 6.48	86	56- 9.12
2	1- 3.84	19	12- 6.48	36	23- 9.12	53	34-11.76	70	46- 2.40	87	57- 5.04
3	1-11.76	20	13- 2.40	37	24- 5.04	54	35- 7.68	71	46-10.32	88	58- 0.96
4	2- 7.68	21	13-10.32	38	25- 0.96	55	36- 3.60	72	47- 6.24	89	58- 8.88
5	3- 3.60	22	14- 6.24	39	25- 8.88	56	36-11.52	73	48- 2.16	90	59- 4.80
6	3-11.52	23	15- 2.16	40	26- 4.80	57	37- 7.44	74	48-10.08	91	60- 0.72
7	4- 7.44	24	15-10.08	41	27- 0.72	58	38- 3.36	75	49- 6.00	92	60- 8.64
8	5- 3.36	25	16- 6.00	42	27- 8.64	59	38-11.28	76	50- 1.92	93	61- 4.56
9	5-11.28	26	17- 1.92	43	28- 4.56	60	39- 7.20	77	50- 9.84	94	62- 0.48
10	6- 7.20	27	17- 9.84	44	29- 0.48	61	40- 3.12	78	51- 5.76	95	62- 8.40
11	7- 3.12	28	18- 5.76	45	29- 8.40	62	40-11.04	79	52- 1.68	96	63- 4.32
12	7-11.04	29	19- 1.68	46	30- 4.32	63	41- 6.96	80	52- 9.60	97	64- 0.24
13	8- 6.96	30	19- 9.60	47	31- 0.24	64	42- 2.88	81	53- 5.52	98	64- 8.16
14	9- 2.88	31	20- 5.52	48	31- 8.16	65	42-10.80	82	54- 1.44	99	65- 4.08
15	9-10.80	32	21- 1.44	49	32- 4.08	66	43- 6.72	83	54- 9.36	100	66- .000
16	10- 6.72	33	21- 9.36	50	33- 0.00	67	44- 2.64	84	55- 5.28	101	66 -7.92
17	11- 2.64	34	22- 5.28	51	33- 7.92	68	44-10.56	85	56- 1.20	102	67- 3.84

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=10°	I	T	E	I=20°	I	T	E	I=30°
1°	50.00	.218	+	11°	551.70	26.500	+	21°	1061.9	97.577	+
10'	58.34	.297		10'	560.11	27.313		10'	1070.6	99.155	
20'	66.67	.388	5° C.	20'	568.53	28.137	5° C	20'	1079.2	100.75	5° C
30'	75.01	.491	T	30'	576.95	28.974	T	30'	1087.8	102.35	T
40'	83.34	.606	.03	40'	585.36	29.824	.06	40'	1096.4	103.97	.10
50'	91.68	.733	E	50'	593.79	30.686	E	50'	1105.1	105.60	E
2°	100.01	.873	.001	12°	602.21	31.561	.006	22°	1113.7	107.24	.013
10'	108.35	1.024		10'	610.64	32.447		10'	1122.4	108.90	
20'	116.68	1.188		20'	619.07	33.347		20'	1131.0	110.57	
30'	125.02	1.364		30'	627.50	34.259		30'	1139.7	112.25	
40'	133.36	1.552		40'	635.93	35.183		40'	1148.4	113.95	
50'	141.70	1.752		50'	644.37	36.120		50'	1157.0	115.66	
3°	150.04	1.964	10° C.	13°	652.81	37.070	10° C.	23°	1165.7	117.38	10° C.
10'	158.38	2.188	T	10'	661.25	38.031	T	10'	1174.4	119.12	T
20'	166.72	2.425		20'	669.70	39.006		20'	1183.1	120.87	
30'	175.06	2.674	.06	30'	678.15	39.993	.13	30'	1191.8	122.63	.19
40'	183.40	2.934	E	40'	686.60	40.992	E	40'	1200.5	124.41	E
50'	191.74	3.207	.003	50'	695.06	42.004	.011	50'	1209.2	126.20	.025
4°	200.08	3.492		14°	703.51	43.029		24°	1217.9	128.00	
10'	208.43	3.790		10'	711.97	44.066		10'	1226.6	129.82	
20'	216.77	4.099		20'	720.44	45.116		20'	1235.3	131.65	
30'	225.12	4.421		30'	728.90	46.178		30'	1244.0	133.50	
40'	233.47	4.755		40'	737.37	47.253		40'	1252.8	135.35	
50'	241.81	5.100		50'	745.85	48.341		50'	1261.5	137.23	
			15° C.				15° C.				15° C.
			T				T				T
5°	250.16	5.459	.09	15°	754.32	49.441	.19	25°	1270.2	139.11	.29
10'	258.51	5.829	E	10'	762.80	50.554	E	10'	1279.0	141.01	E
20'	266.86	6.211		20'	771.29	51.679		20'	1287.7	142.93	
30'	275.21	6.606	.004	30'	779.77	52.818	.017	30'	1296.5	144.85	.038
40'	283.57	7.013		40'	788.26	53.969		40'	1305.3	146.79	
50'	291.92	7.432		50'	796.75	55.132		50'	1314.0	148.75	
6°	300.28	7.863		16°	805.25	56.309		26°	1322.8	150.71	
10'	308.64	8.307		10'	813.75	57.498		10'	1331.6	152.69	
20'	316.99	8.762		20'	822.25	58.699		20'	1340.4	154.69	
30'	325.35	9.230		30'	830.76	59.914		30'	1349.2	156.70	
40'	333.71	9.710		40'	839.27	61.141		40'	1358.0	158.72	
50'	342.08	10.202		50'	847.78	62.381		50'	1366.8	160.76	
			20° C.				20° C.				20° C.
			T				T				T
7°	350.44	10.707	.13	17°	856.30	63.634	.26	27°	1375.6	162.81	.39
10'	358.81	11.224	E	10'	864.82	64.900	E	10'	1384.4	164.86	E
20'	367.17	11.753	.006	20'	873.35	66.178	.022	20'	1393.2	166.95	.051
30'	375.54	12.294		30'	881.88	67.470		30'	1402.0	169.04	
40'	383.91	12.847		40'	890.41	68.774		40'	1410.9	171.15	
50'	392.28	13.413		50'	898.95	70.091		50'	1419.7	173.27	
8°	400.66	13.991		18°	907.49	71.421		28°	1428.6	175.41	
10'	409.03	14.582		10'	916.03	72.764		10'	1437.4	177.55	
20'	417.41	15.184		20'	924.58	74.119		20'	1446.3	179.72	
30'	425.79	15.799		30'	933.13	75.488		30'	1455.1	181.89	
40'	434.17	16.426		40'	941.69	76.869		40'	1464.0	184.08	
50'	442.55	17.065		50'	950.25	78.264		50'	1472.9	186.29	
			25° C.				25° C.				25° C.
			T				T				T
9°	450.93	17.717	.007	19°	958.81	79.671	.028	29°	1481.8	188.51	.065
10'	459.32	18.381		10'	967.38	81.092		10'	1490.7	190.74	
20'	467.71	19.058		20'	975.96	82.525		20'	1499.6	192.99	
30'	476.10	19.746		30'	984.53	83.972		30'	1508.5	195.25	
40'	484.49	20.447		40'	993.12	85.431		40'	1517.4	197.53	
50'	492.88	21.161		50'	1001.7	86.904		50'	1526.3	199.82	
10°	501.28	21.887	30° C.	20°	1010.3	88.389	30° C.	30°	1535.3	202.12	30° C.
10'	509.68	22.624	T	10'	1018.9	89.888	T	10'	1544.2	204.44	T
20'	518.08	23.375	.19	20'	1027.5	91.399	.39	20'	1553.1	206.77	.59
30'	526.48	24.138	E	30'	1036.1	92.924	E	30'	1562.1	209.12	E
40'	534.89	24.913		40'	1044.7	94.462		40'	1571.0	211.48	
50'	543.29	25.700	.008	50'	1053.3	96.013	.034	50'	1580.0	213.86	.078

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=40°	I	T	E	I=50°	I	T	E	I=60°			
31°	1589.0	216.3	+	41°	2142.2	387.4	+	51°	2732.9	618.4	+			
10'	1598.0	218.7		10'	2151.7	390.7		10'	2743.1	622.8				
20'	1606.9	221.1		5° C.	20'	2161.2		394.1	20'	2753.4		627.2	5° C.	
30'	1615.9	223.5		T	30'	2170.8		397.4	T	30'		2763.7	631.7	T
40'	1624.9	226.0		.13	40'	2180.3		400.8	.17	40'		2773.9	636.2	.21
50'	1633.9	228.4	E	50'	2189.9	404.2	E	50'	2784.2	640.7	E			
32°	1643.0	230.9	.023	42°	2199.4	407.6	.037	52°	2794.5	645.2	.056			
10'	1652.0	233.4		10'	2209.0	411.1		10'	2804.9	649.7				
20'	1661.0	235.9		20'	2218.6	414.5		20'	2815.2	654.3				
30'	1670.0	238.4		30'	2228.1	418.0		30'	2825.6	658.8				
40'	1679.1	241.0		40'	2237.7	421.4		40'	2835.9	663.4				
50'	1688.1	243.5	50'	2247.3	425.0	50'	2846.3	668.0						
33°	1697.2	246.1	10° C.	43°	2257.0	428.5	10° C.	53°	2856.7	672.7	10° C.			
10'	1706.3	248.7		10'	2266.6	432.0		10'	2867.1	677.3		T		
20'	1715.3	251.3		T	20'	2276.2		435.6	T	20'		2877.5	682.0	.42
30'	1724.4	253.9		.26	30'	2285.9		439.2	.34	30'		2888.0	686.7	E
40'	1733.5	256.5		E	40'	2295.6		442.8	E	40'		2898.4	691.4	.112
50'	1742.6	259.1	.046	50'	2305.2	446.4	.075	50'	2908.9	696.1				
34°	1751.7	261.8	15° C.	44°	2314.9	450.0	15° C.	54°	2919.4	700.9	15° C.			
10'	1760.8	264.5		10'	2324.6	453.6		10'	2929.9	705.7				
20'	1770.0	267.2		20'	2334.3	457.3		20'	2940.4	710.5				
30'	1779.1	269.9		30'	2344.1	461.0		30'	2951.0	715.3				
40'	1788.2	272.6		40'	2353.8	464.6		40'	2961.5	720.1				
50'	1797.4	275.3	T	50'	2363.5	468.4	T	50'	2972.1	725.0				
35°	1806.6	278.1	.40	45°	2373.3	472.1	.51	55°	2982.7	729.9	.63			
10'	1815.7	280.8		10'	2383.1	475.8		10'	2993.3	734.8				
20'	1824.9	283.6		E	20'	2392.8		479.6	E	20'		3003.9	739.7	E
30'	1834.1	286.4		.070	30'	2402.6		483.4	.116	30'		3014.5	744.6	.168
40'	1843.3	289.2		40'	2412.4	487.2		40'	3025.2	749.6				
50'	1852.5	292.0	50'	2422.3	491.0	50'	3035.8	754.6						
36°	1861.7	294.9	20° C.	46°	2432.1	494.8	20° C.	56°	3046.5	759.6	20° C.			
10'	1870.9	297.7		10'	2441.9	498.7		10'	3057.2	764.6				
20'	1880.1	300.6		20'	2451.8	502.5		20'	3067.9	769.7				
30'	1889.4	303.5		30'	2461.7	506.4		30'	3078.7	774.7				
40'	1898.6	306.4		40'	2471.5	510.3		40'	3089.4	779.8				
50'	1907.9	309.3	T	50'	2481.4	514.3	T	50'	3100.2	784.9				
37°	1917.1	312.2	.53	47°	2491.3	518.2	.68	57°	3110.9	790.1	.84			
10'	1926.4	315.2		10'	2501.2	522.2		10'	3121.7	795.2				
20'	1935.7	318.1		E	20'	2511.2		526.1	E	20'		3132.6	800.4	.225
30'	1945.0	321.1		.093	30'	2521.1		530.1	.151	30'		3143.4	805.6	
40'	1954.3	324.1		40'	2531.1	534.2		40'	3154.2	810.9				
50'	1963.6	327.1	50'	2541.0	538.2	50'	3165.1	816.1						
38°	1972.9	330.2	25° C.	48°	2551.0	542.2	25° C.	58°	3176.0	821.4	25° C.			
10'	1982.2	333.2		10'	2561.0	546.3		10'	3186.9	826.7				
20'	1991.5	336.3		20'	2571.0	550.4		20'	3197.8	832.0				
30'	2000.9	339.3		T	30'	2581.0		554.5	T	30'		3208.8	837.3	T
40'	2010.2	342.4		.67	40'	2591.0		558.6	.85	40'		3219.7	842.7	.105
50'	2019.6	345.5	E	50'	2601.1	562.8	E	50'	3230.7	848.1	E			
39°	2029.0	348.6	.117	49°	2611.2	566.9	.189	59°	3241.7	853.5	.283			
10'	2038.4	351.8		10'	2621.2	571.1		10'	3252.7	858.9				
20'	2047.8	354.9		20'	2631.3	575.3		20'	3263.7	864.3				
30'	2057.2	358.1		30'	2641.4	579.5		30'	3274.8	869.8				
40'	2066.6	361.3		40'	2651.5	583.8		40'	3285.8	875.3				
50'	2076.0	364.5	50'	2661.6	588.0	50'	3296.9	880.8						
40°	2085.4	367.7	30° C.	50°	2671.8	592.3	30° C.	60°	3308.0	886.4	30° C.			
10'	2094.9	371.0		10'	2681.9	596.6		10'	3319.1	892.0				
20'	2104.3	374.2		T	20'	2692.1		600.9	T	20'		3330.3	897.5	T
30'	2113.8	377.5		.80	30'	2702.3		605.3	1.02	30'		3341.4	903.2	1.27
40'	2123.3	380.8		E	40'	2712.5		609.6	.227	40'		3352.6	908.8	E
50'	2132.7	384.1	.141	50'	2722.7	614.0	50'	3363.8	914.5	.340				

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=70°	I	T	E	I=80°	I	T	E	I=90°
61°	3375.0	920.2	+ 5° C. T .25 E .080	71°	4086.9	1308.2	+ 5° C. T .30 E .110	81°	4893.6	1805.3	+ 5° C. T .36 E .149
10'	3386.3	925.9		10'	4099.5	1315.6		10'	4908.0	1814.7	
20'	3397.5	931.6		20'	4112.1	1322.9		20'	4922.5	1824.1	
30'	3408.8	937.3		30'	4124.8	1330.3		30'	4937.0	1833.6	
40'	3420.1	943.1		40'	4137.4	1337.7		40'	4951.5	1843.1	
50'	3431.4	948.9	50'	4150.1	1345.1	50'	4966.1	1852.6			
62°	3442.7	954.8	.080	72°	4162.8	1352.6	.110	82°	4980.7	1862.2	.149
10'	3454.1	960.6		10'	4175.6	1360.1		10'	4995.4	1871.8	
20'	3465.4	966.5		20'	4188.5	1367.6		20'	5010.0	1881.5	
30'	3476.8	972.4		30'	4201.2	1375.2		30'	5024.8	1891.2	
40'	3488.3	978.3		40'	4214.0	1382.8		40'	5039.5	1900.9	
50'	3499.7	984.3	50'	4226.8	1390.4	50'	5054.3	1910.7			
63°	3511.1	990.2	10° C. T .51 E .159	73°	4239.7	1398.0	10° C. T .61 E .220	83°	5069.2	1920.5	10° C. T .72 E .299
10'	3522.6	996.2		10'	4252.6	1405.7		10'	5084.0	1930.4	
20'	3534.1	1002.3		20'	4265.6	1413.5		20'	5099.0	1940.3	
30'	3545.6	1008.3		30'	4278.5	1421.2		30'	5113.9	1950.3	
40'	3557.2	1014.4		40'	4291.5	1429.0		40'	5128.9	1960.2	
50'	3568.7	1020.5	50'	4304.6	1436.8	50'	5143.9	1970.3			
64°	3580.3	1026.6	15° C. T .76 E .240	74°	4317.6	1444.6	15° C. T .91 E .332	84°	5159.0	1980.4	15° C. T 1.09 E .450
10'	3591.9	1032.8		10'	4330.7	1452.5		10'	5174.1	1990.5	
20'	3603.5	1039.0		20'	4343.8	1460.4		20'	5189.3	2000.6	
30'	3615.1	1045.2		30'	4356.9	1468.4		30'	5204.4	2010.8	
40'	3626.8	1051.4		40'	4370.1	1476.4		40'	5219.7	2021.1	
50'	3638.5	1057.7	50'	4383.3	1484.4	50'	5234.9	2031.4			
65°	3650.2	1063.9	.76 E .240	75°	4396.5	1492.4	.332	85°	5250.3	2041.7	T 1.09 E .450
10'	3661.9	1070.2		10'	4409.8	1500.5		10'	5265.6	2052.1	
20'	3673.7	1076.6		20'	4423.1	1508.6		20'	5281.0	2062.5	
30'	3685.4	1082.9		30'	4436.4	1516.7		30'	5296.4	2073.0	
40'	3697.2	1089.3		40'	4449.7	1524.9		40'	5311.9	2083.5	
50'	3709.0	1095.7	50'	4463.1	1533.1	50'	5327.4	2094.1			
66°	3720.9	1102.2	20° C. T 1.02 E .321	76°	4476.5	1541.4	20° C. T 1.22 E .445	86°	5343.0	2104.7	20° C. T 1.45 E .603
10'	3732.7	1108.6		10'	4489.9	1549.7		10'	5358.6	2115.3	
20'	3744.6	1115.1		20'	4503.4	1558.0		20'	5374.2	2126.0	
30'	3756.5	1121.7		30'	4516.9	1566.3		30'	5389.9	2136.7	
40'	3768.5	1128.2		40'	4530.4	1574.7		40'	5405.6	2147.5	
50'	3780.4	1134.8	50'	4544.0	1583.1	50'	5421.4	2158.4			
67°	3792.4	1141.4	.321	77°	4557.6	1591.6	.445	87°	5437.2	2169.2	T E .603
10'	3804.4	1148.0		10'	4571.2	1600.1		10'	5453.1	2180.2	
20'	3816.4	1154.7		20'	4584.8	1608.6		20'	5469.0	2191.1	
30'	3828.4	1161.3		30'	4598.5	1617.1		30'	5484.9	2202.2	
40'	3840.5	1168.1		40'	4612.2	1625.7		40'	5500.9	2213.2	
50'	3852.6	1174.8	50'	4626.0	1634.4	50'	5517.0	2224.3			
68°	3864.7	1181.6	25° C. T 1.28 E .403	78°	4639.8	1643.0	25° C. T 1.53 E .558	88°	5533.1	2235.5	25° C. T 1.83 E .756
10'	3876.8	1188.4		10'	4653.6	1651.7		10'	5549.2	2246.7	
20'	3889.0	1195.2		20'	4667.4	1660.5		20'	5565.4	2258.0	
30'	3901.2	1202.0		30'	4681.3	1669.2		30'	5581.6	2269.3	
40'	3913.4	1208.9		40'	4695.2	1678.1		40'	5597.8	2280.6	
50'	3925.6	1215.8	50'	4709.2	1686.9	50'	5614.2	2292.0			
69°	3937.9	1222.7	.403	79°	4723.2	1695.8	.558	89°	5630.5	2303.5	T E .910
10'	3950.2	1229.7		10'	4737.2	1704.7		10'	5646.9	2315.0	
20'	3962.5	1236.7		20'	4751.2	1713.7		20'	5663.4	2326.6	
30'	3974.8	1243.7		30'	4765.3	1722.7		30'	5679.9	2338.2	
40'	3987.2	1250.8		40'	4779.4	1731.7		40'	5696.4	2349.8	
50'	3999.5	1257.9	50'	4793.6	1740.8	50'	5713.0	2361.5			
70°	4011.9	1265.0	30° C. T 1.54 E .485	80°	4807.7	1749.9	30° C. T 1.84 E .671	90°	5729.7	2373.3	30° C. T 2.20 E .910
10'	4024.4	1272.1		10'	4822.0	1759.0		10'	5746.3	2385.1	
20'	4036.8	1279.3		20'	4836.2	1768.2		20'	5763.1	2397.0	
30'	4049.3	1286.5		30'	4850.5	1777.4		30'	5779.9	2408.9	
40'	4061.8	1293.6		40'	4864.8	1786.7		40'	5796.7	2420.9	
50'	4074.4	1300.9	50'	4879.2	1796.0	50'	5813.6	2432.9			

T = R tan 1/2 I

E = R exsec 1/2 I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=100°	I	T	E	I=110°	I	T	E	I=120°			
91°	5830.5	2444.9	+	101°	6950.6	3278.1	+	111°	8336.7	4386.1	+			
10'	5847.5	2457.1		10'	6971.3	3294.1		10'	8362.7	4407.6				
20'	5864.6	2469.3		20'	6992.0	3310.1		20'	8388.9	4429.2				
30'	5881.7	2481.5		30'	7012.7	3326.1		30'	8415.1	4450.9				
40'	5898.8	2493.8		40'	7033.6	3342.3		40'	8441.5	4472.7				
50'	5916.0	2506.1	E	50'	7054.5	3358.5	E	50'	8468.0	4494.6	E			
92°	5933.2	2518.5	.200	102°	7075.5	3374.9	.268	112°	8494.6	4516.6	.360			
10'	5950.5	2531.0)	10'	7096.6	3391.2)	10'	8521.3	4538.8)			
20'	5967.9	2543.5		20'	7117.8	3407.7		20'	8548.1	4561.1				
30'	5985.3	2556.0		30'	7139.0	3424.3		30'	8575.0	4583.4				
40'	6002.7	2568.6		40'	7160.3	3440.9		40'	8602.1	4606.0				
50'	6020.2	2581.3		50'	7181.7	3457.6		50'	8629.3	4628.6				
93°	6037.8	2594.0	10° C.	103°	7203.2	3474.4	10° C.	113°	8656.6	4651.3	10° C.			
10'	6055.4	2606.8	T	10'	7224.7	3491.3	T	10'	8684.0	4674.2	T			
20'	6073.1	2619.7	.86	20'	7246.3	3508.2	.103	20'	8711.5	4697.2	1.25			
30'	6090.8	2632.6		30'	7268.0	3525.2		30'	8739.2	4720.3				
40'	6108.6	2645.5		E	40'	7289.8		3542.4	E	40'		8767.0	4743.6	
50'	6126.4	2658.5		.401	50'	7311.7		3559.6	.536	50'		8794.9	4766.9	.721
94°	6144.3	2671.6)	104°	7333.6		3576.8)	114°		8822.9	4790.4)
10'	6162.2	2684.7	10'		7355.6	3594.2	10'	8851.0		4814.1				
20'	6180.2	2697.9	20'		7377.8	3611.7	20'	8879.3		4837.8				
30'	6198.3	2711.2	30'		7399.9	3629.2	30'	8907.7		4861.7				
40'	6216.4	2724.5	40'		7422.2	3646.8	40'	8936.3		4885.7				
50'	6234.6	2737.9	15° C.	50'	7444.6	3664.5	15° C.	50'	8965.0	4909.9	15° C.			
95°	6252.8	2751.3	T	105°	7467.0	3682.3	T	115°	8993.8	4934.1	T			
10'	6271.1	2764.8	1.30	10'	7489.6	3700.2	1.56	10'	9022.7	4958.6	1.93			
20'	6289.4	2778.3	E	20'	7512.2	3718.2	E	20'	9051.7	4983.1	E			
30'	6307.9	2792.0	.604	30'	7534.9	3736.2	.806	30'	9080.9	5007.8	1.09			
40'	6326.3	2805.6		40'	7557.7	3754.4		40'	9110.3	5032.6				
50'	6344.8	2819.4		50'	7580.5	3772.6		50'	9139.8	5057.6				
96°	6363.4	2833.2		20° C.	106°	7603.5		3791.0	20° C.	116°		9169.4	5082.7	20° C.
10'	6382.1	2847.0			10'	7626.6		3809.4		10'		9199.1	5107.9	
20'	6400.8	2861.0	20'		7649.7	3827.9	20'	9229.0		5133.3				
30'	6419.5	2875.0	30'		7672.9	3846.5	30'	9259.0		5158.8				
40'	6438.4	2889.0	40'		7696.3	3865.2	40'	9289.2		5184.5				
50'	6457.3	2903.1	T	50'	7719.7	3884.0	T	50'	9319.5	5210.3	T			
97°	6476.2	2917.3	1.74	107°	7743.2	3902.9	2.08	117°	9349.9	5236.2	2.52			
10'	6495.2	2931.6	E	10'	7766.8	3921.9	E	10'	9380.5	5262.3	E			
20'	6514.3	2945.9	.809	20'	7790.5	3940.9	1.08	20'	9411.3	5288.6	1.46			
30'	6533.4	2960.3)	30'	7814.3	3960.1)	30'	9442.2	5315.0)			
40'	6552.6	2974.7		40'	7838.1	3979.4		40'	9473.2	5341.5				
50'	6571.9	2989.2		50'	7862.1	3998.7		50'	9504.4	5368.2				
98°	6591.2	3003.8		25° C.	108°	7886.2		4018.2	25° C.	118°		9535.7	5395.1	25° C.
10'	6610.6	3018.4			10'	7910.4		4037.8		10'		9567.2	5422.1	
20'	6630.1	3033.1	20'		7934.6	4057.4	20'	9598.9		5449.2				
30'	6649.6	3047.9	T		30'	7959.0	4077.2	T		30'	9630.7	5476.5	T	
40'	6669.2	3062.8	2.18		40'	7983.5	4097.1	2.61		40'	9662.6	5504.0	3.16	
50'	6688.8	3077.7	E	50'	8008.0	4117.0	E	50'	9694.7	5531.7	E			
99°	6708.6	3092.7	1.02	109°	8032.7	4137.1	1.36	119°	9727.0	5559.4	1.83			
10'	6728.4	3107.7)	10'	8057.4	4157.3)	10'	9759.4	5587.4)			
20'	6748.2	3122.9		20'	8082.3	4177.5		20'	9792.0	5615.5				
30'	6768.1	3138.1		30'	8107.3	4197.9		30'	9824.8	5643.8				
40'	6788.1	3153.3		40'	8132.3	4218.4		40'	9857.7	5672.3				
50'	6808.2	3168.7		50'	8157.5	4239.0		50'	9890.8	5700.9				
100°	6828.3	3184.1	30° C.	110°	8182.8	4259.7	30° C.	120°	9924.0	5729.7	30° C.			
10'	6848.5	3199.6	T	10'	8208.2	4280.5	T	10'	9957.5	5758.6	T			
20'	6868.8	3215.1	2.62	20'	8233.7	4301.4	3.14	20'	9991.0	5787.7	3.81			
30'	6889.2	3230.8	E	30'	8259.3	4322.4	E	30'	10025.0	5817.0	E			
40'	6909.6	3246.5	1.22	40'	8285.0	4343.6	1.63	40'	10059.0	5846.5	2.20			
50'	6930.1	3262.3		50'	8310.8	4364.8		50'	10093.0	5876.1				

T = R tan ½ I

E = R exsec ½ I

TABLE X.
MIDDLE ORDINATES OF RAILS
Length of Rail (feet)

C o /	R Feet	30 Inch	28 Inch	26 Inch	24 Inch	22 Inch	20 Inch	C o	R Feet	30 Inch	28 Inch	26 Inch	24 Inch	22 Inch	20 Inch
0-20	17189	.08	.07	.06	.05	.04	.03	8	716.8	1.88	1.64	1.42	1.20	1.01	.84
0-40	8594	.16	.14	.12	.10	.08	.07	9	637.3	2.12	1.84	1.60	1.35	1.14	.94
1-0	5730	.24	.20	.18	.15	.13	.10	10	573.7	2.36	2.05	1.78	1.50	1.27	1.04
1-20	4297	.31	.27	.23	.20	.17	.13	11	521.7	2.59	2.26	1.95	1.65	1.39	1.15
1-40	3438	.39	.34	.29	.25	.21	.17	12	478.3	3.83	2.47	2.15	1.81	1.54	1.26
2-0	2865	.47	.41	.35	.30	.25	.20	13	441.7	3.05	2.66	2.30	1.96	1.66	1.36
2-20	2456	.55	.48	.41	.35	.29	.23	14	410.3	3.30	2.87	2.48	2.10	1.78	1.46
2-40	2149	.63	.55	.47	.40	.33	.27	15	383.1	3.54	3.08	2.68	2.26	1.91	1.57
3-0	1910	.71	.62	.53	.45	.38	.31	16	359.3	3.76	3.28	2.83	2.40	2.04	1.67
3-20	1719	.78	.68	.59	.50	.42	.35	17	338.3	4.00	3.48	3.02	2.57	2.16	1.78
3-40	1563	.86	.75	.65	.55	.46	.38	18	319.6	4.21	3.67	3.18	2.70	2.28	1.87
4-0	1433	.94	.82	.71	.60	.50	.42	19	302.9	4.45	3.89	3.36	2.86	2.41	1.98
4-20	1323	1.02	.89	.77	.65	.55	.45	20	287.9	4.70	4.09	3.55	3.00	2.54	2.09
4-40	1228	1.10	.96	.83	.70	.59	.48	22	262.0	5.16	4.44	3.84	3.30	2.80	2.29
5	1146	1.18	1.03	.89	.75	.63	.52	24	240.5	5.64	4.92	4.20	3.59	3.04	2.50
6	955.3	1.41	1.23	1.06	.90	.76	.62	26	222.3	6.07	5.29	4.58	3.88	3.29	2.70
7	819.0	1.65	1.44	1.24	1.05	.89	.73								

TABLE XI.
SHORT RADIUS CURVES

Radius Feet	Chord Feet	Central Angle	Deflection Angle	Deflection for 1 Foot
35	10	16-26	8-13	49.3
45	10	12-46	6-23	38.3
50	15	17-16	8-38	34.5
60	15	14-22	7-11	28.8
75	15	11-30	5-45	23.0
100	20	11-30	5-45	17.3
120	20	9-34	4-47	14.3
150	20	7-39	3-49	11.5
190	25	7-32	3-46	9.15
200	25	7-10	3-35	8.6
225	25	6-25	3-12	7.7
240	25	5-58	2-59	7.2
250	25	5-44	2-52	6.9
275	25	5-12	2-36	6.2
288	50	9-58	4-59	6.0
300	50	9-32	4-46	5.7
350	50	8-12	4-06	4.9
376	50	7-40	3-50	4.6
400	50	7-10	3-35	4.3
410	50	7-00	3-30	4.2

To find length of curve divide angle from P. C. to P. T. by central angle of chord, and multiply by length of chord.

TABLE XII.


INCLINED DISTANCE OF 100 FT. REDUCED TO HORIZONTAL

Slope	Horizontal Distance	Correction	Rise Per Foot	Slope	Horizontal Distance	Correction	Rise Per Foot
0°00'	100.000	0.000	0.000	8°00'	99.027	0.973	0.139
15'	99.999	0.001	0.004	15'	98.965	1.035	0.143
30'	99.996	0.004	0.009	30'	98.902	1.098	0.148
45'	99.991	0.009	0.013	45'	98.836	1.164	0.152
1 00	99.985	0.015	0.017	9 00	98.769	1.231	0.156
15	99.976	0.024	0.022	15	98.700	1.300	0.161
30	99.966	0.034	0.026	30	98.629	1.371	0.165
45	99.953	0.047	0.031	45	98.556	1.444	0.169
2 00	99.939	0.061	0.035	10 00	98.481	1.519	0.174
15	99.923	0.077	0.039	15	98.404	1.596	0.178
30	99.905	0.095	0.044	30	98.325	1.675	0.182
45	99.885	0.115	0.048	45	98.245	1.755	0.187
3 00	99.863	0.137	0.052	11 00	98.163	1.837	0.191
15	99.839	0.161	0.057	15	98.079	1.921	0.195
30	99.813	0.187	0.061	30	97.992	2.008	0.199
45	99.786	0.214	0.065	45	97.905	2.095	0.204
4 00	99.756	0.244	0.070	12 00	97.815	2.185	0.208
15	99.725	0.275	0.074	15	97.723	2.277	0.212
30	99.692	0.308	0.078	30	97.630	2.370	0.216
45	99.657	0.343	0.083	45	97.534	2.466	0.221
5 00	99.619	0.381	0.087	13 00	97.437	2.563	0.225
15	99.580	0.420	0.092	15	97.338	2.662	0.229
30	99.540	0.460	0.096	30	97.237	2.763	0.233
45	99.497	0.503	0.100	45	97.134	2.866	0.238
6 00	99.452	0.548	0.105	14 00	97.030	2.970	0.242
15	99.406	0.594	0.109	15	96.923	3.077	0.246
30	99.357	0.643	0.113	30	96.815	3.185	0.250
45	99.307	0.693	0.118	45	96.705	3.295	0.255
7 00	99.255	0.745	0.122	15 00	96.593	3.407	0.259
15	99.200	0.800	0.126	15	96.479	3.521	0.263
30	99.144	0.856	0.131	30	96.363	3.637	0.267
45	99.087	0.913	0.135	45	96.246	3.754	0.271

TABLE XIII.

MINUTES IN DECIMALS OF A DEGREE.

0 30''	.00833	10' 30''	.17500	20' 30''	.34167	30' 10''	.50833	40' 30''	.67500	50' 10''	.84167
1 00	.01667	11 00	.18333	21 00	.35000	31 00	.51667	41 00	.68333	51 00	.85000
30	.02500	30	.19167	30	.35833	30	.52500	30	.69167	30	.85833
2 00	.03333	12 00	.20000	22 00	.36667	32 00	.53333	42 00	.70000	52 00	.86667
30	.04167	30	.20833	30	.37500	30	.54167	30	.70833	30	.87500
3 00	.05000	13 00	.21667	23 00	.38333	33 00	.55000	43 00	.71667	53 00	.88333
30	.05833	30	.22500	30	.39167	30	.55833	30	.72500	30	.89167
4 00	.06667	14 00	.23333	24 00	.40000	34 00	.56667	44 00	.73333	54 00	.90000
30	.07500	30	.24167	30	.40833	30	.57500	30	.74167	30	.90833
5 00	.08333	15 00	.25000	25 00	.41667	35 00	.58333	45 00	.75000	55 00	.91667
30	.09167	30	.25833	30	.42500	30	.59167	30	.75833	30	.92500
6 00	.10000	16 00	.26667	26 00	.43333	36 00	.60000	46 00	.76667	56 00	.93333
30	.10833	30	.27500	30	.44167	30	.60833	30	.77500	30	.94167
7 00	.11667	17 00	.28333	27 00	.45000	37 00	.61667	47 00	.78333	57 00	.95000
30	.12500	30	.29167	30	.45833	30	.62500	30	.79167	30	.95833
8 00	.13333	18 00	.30000	28 00	.46667	38 00	.63333	48 00	.80000	58 00	.96667
30	.14167	30	.30833	30	.47500	30	.64167	30	.80833	30	.97500
9 00	.15000	19 00	.31667	29 00	.48333	39 00	.65000	49 00	.81667	59 00	.98333
30	.15833	30	.32500	30	.49167	30	.65833	30	.82500	30	.99167
10 00	.16667	20 00	.33333	30 00	.50000	40 00	.66667	50 00	.83333	60 00	1.00000

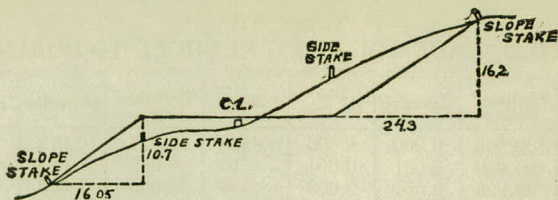


DISTANCES FROM SIDE STAKES FOR CROSS-SECTIONING.

SLOPE $1\frac{1}{2}$ TO 1. ROADWAY OF ANY WIDTH.

	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	
0	0 00	0 15	0 30	0 45	0 60	0 75	0 90	1 05	1 20	1 35	0
1	1 50	1 65	1 80	1 95	2 10	2 25	2 40	2 55	2 70	2 85	1
2	3 00	3 15	3 30	3 45	3 60	3 75	3 90	4 05	4 20	4 35	2
3	4 50	4 65	4 80	4 95	5 10	5 25	5 40	5 55	5 70	5 85	3
4	6 00	6 15	6 30	6 45	6 60	6 75	6 90	7 05	7 20	7 35	4
5	7 50	7 65	7 80	7 95	8 10	8 25	8 40	8 55	8 70	8 85	5
6	9 00	9 15	9 30	9 45	9 60	9 75	9 90	10 05	10 20	10 35	6
7	10 50	10 65	10 80	10 95	11 10	11 25	11 40	11 55	11 70	11 85	7
8	12 00	12 15	12 30	12 45	12 60	12 75	12 90	13 05	13 20	13 35	8
9	13 50	13 65	13 80	13 95	14 10	14 25	14 40	14 55	14 70	14 85	9
10	15 00	15 15	15 30	15 45	15 60	15 75	15 90	16 05	16 20	16 35	10
11	16 50	16 65	16 80	16 95	17 10	17 25	17 40	17 55	17 70	17 85	11
12	18 00	18 15	18 30	18 45	18 60	18 75	18 90	19 05	19 20	19 35	12
13	19 50	19 65	19 80	19 95	20 10	20 25	20 40	20 55	20 70	20 85	13
14	21 00	21 15	21 30	21 45	21 60	21 75	21 90	22 05	22 20	22 35	14
15	22 50	22 65	22 80	22 95	23 10	23 25	23 40	23 55	23 70	23 85	15
16	24 00	24 15	24 30	24 45	24 60	24 75	24 90	25 05	25 20	25 35	16
17	25 50	25 65	25 80	25 95	26 10	26 25	26 40	26 55	26 70	26 85	17
18	27 00	27 15	27 30	27 45	27 60	27 75	27 90	28 05	28 20	28 35	18
19	28 50	28 65	28 80	28 95	29 10	29 25	29 40	29 55	29 70	29 85	19
20	30 00	30 15	30 30	30 45	30 60	30 75	30 90	31 05	31 20	31 35	20
21	31 50	31 65	31 80	31 95	32 10	32 25	32 40	32 55	32 70	32 85	21
22	33 00	33 15	33 30	33 45	33 60	33 75	33 90	34 05	34 20	34 35	22
23	34 50	34 65	34 80	34 95	35 10	35 25	35 40	35 55	35 70	35 85	23
24	36 00	36 15	36 30	36 45	36 60	36 75	36 90	37 05	37 20	37 35	24
25	37 50	37 65	37 80	37 95	38 10	38 25	38 40	38 55	38 70	38 85	25
26	39 00	39 15	39 30	39 45	39 60	39 75	39 90	40 05	40 20	40 35	26
27	40 50	40 65	40 80	40 95	41 10	41 25	41 40	41 55	41 70	41 85	27
28	42 00	42 15	42 30	42 45	42 60	42 75	42 90	43 05	43 20	43 35	28
29	43 50	43 65	43 80	43 95	44 10	44 25	44 40	44 55	44 70	44 85	29
30	45 00	45 15	45 30	45 45	45 60	45 75	45 90	46 05	46 20	46 35	30
31	46 50	46 65	46 80	46 95	47 10	47 25	47 40	47 55	47 70	47 85	31
32	48 00	48 15	48 30	48 45	48 60	48 75	48 90	49 05	49 20	49 35	32
33	49 50	49 65	49 80	49 95	50 10	50 25	50 40	50 55	50 70	50 85	33
34	51 00	51 15	51 30	51 45	51 60	51 75	51 90	52 05	52 20	52 35	34
35	52 50	52 65	52 80	52 95	53 10	53 25	53 40	53 55	53 70	53 85	35
36	54 00	54 15	54 30	54 45	54 60	54 75	54 90	55 05	55 20	55 35	36
37	55 50	55 65	55 80	55 95	56 10	56 25	56 40	56 55	56 70	56 85	37
38	57 00	57 15	57 30	57 45	57 60	57 75	57 90	58 05	58 20	58 35	38
39	58 50	58 65	58 80	58 95	59 10	59 25	59 40	59 55	59 70	59 85	39
40	60 00	60 15	60 30	60 45	60 60	60 75	60 90	61 05	61 20	61 35	40
41	61 50	61 65	61 80	61 95	62 10	62 25	62 40	62 55	62 70	62 85	41
42	63 00	63 15	63 30	63 45	63 60	63 75	63 90	64 05	64 20	64 35	42
43	64 50	64 65	64 80	64 95	65 10	65 25	65 40	65 55	65 70	65 85	43
44	66 00	66 15	66 30	66 45	66 60	66 75	66 90	67 05	67 20	67 35	44
45	67 50	67 65	67 80	67 95	68 10	68 25	68 40	68 55	68 70	68 85	45
46	69 00	69 15	69 30	69 45	69 60	69 75	69 90	70 05	70 20	70 35	46
47	70 50	70 65	70 80	70 95	71 10	71 25	71 40	71 55	71 70	71 85	47
48	72 00	72 15	72 30	72 45	72 60	72 75	72 90	73 05	73 20	73 35	48
49	73 50	73 65	73 80	73 95	74 10	74 25	74 40	74 55	74 70	74 85	49
50	75 00	75 15	75 30	75 45	75 60	75 75	75 90	76 05	76 20	76 35	50

Computed by L. Leland Locke.

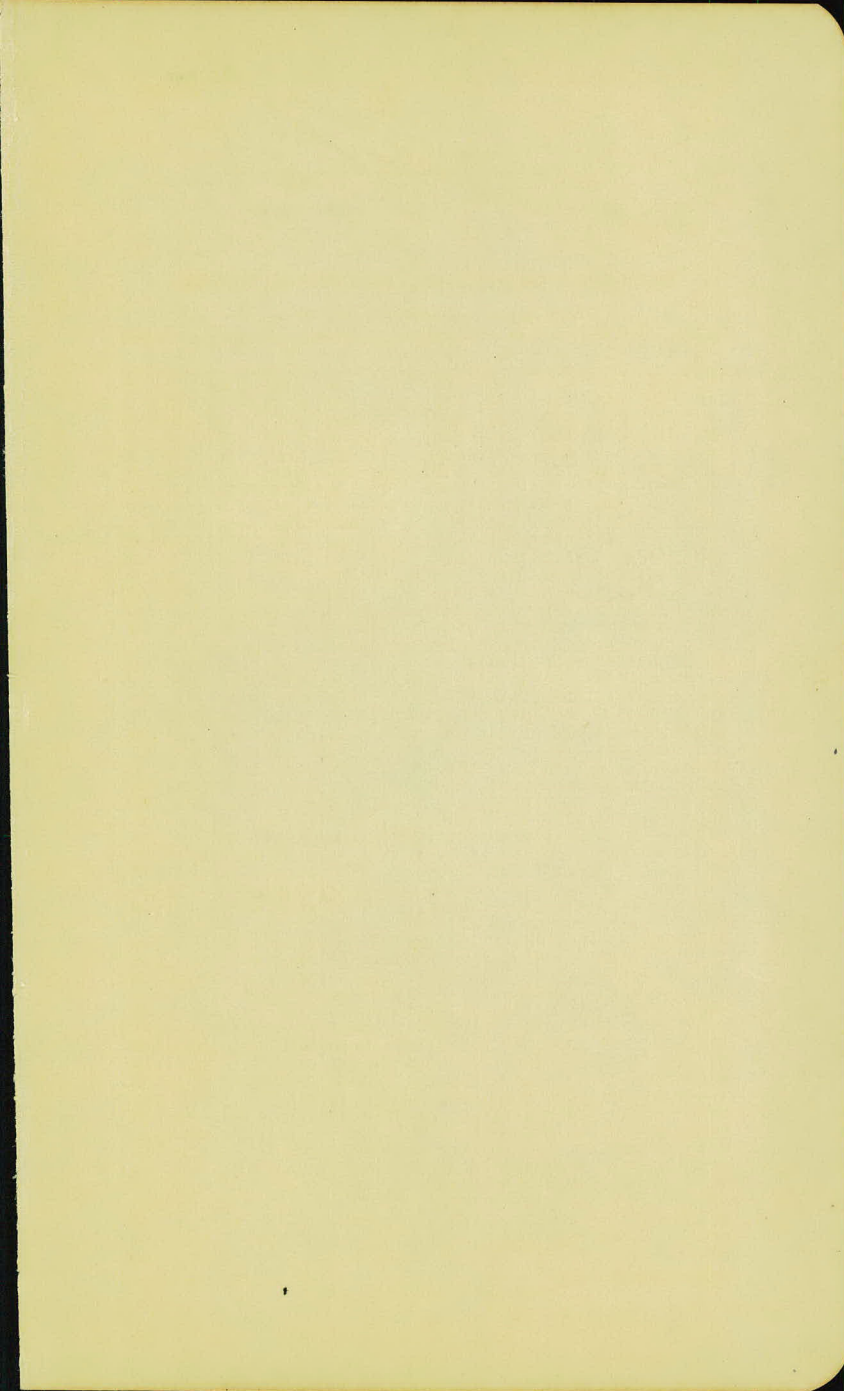

$$\begin{array}{r} 910.68 \\ 1.32 \\ \hline 912.00 \end{array}$$

$$\begin{array}{r} 11.75 \\ 6.00 \\ \hline 5.75 \end{array}$$

$$\begin{array}{r} 12.77 \\ 7.9 \\ \hline 19.87 \end{array}$$

66044'

$$\begin{array}{r} 10.90 \\ 99.19 \\ \hline \end{array}$$

$$\begin{array}{r} 10.89 \\ 9.9 \\ \hline 49 \end{array}$$

$$\begin{array}{r} 11.76 \\ 5.7 \\ \hline 6.06 \end{array}$$

$$\begin{array}{r} 11.89 \\ 62 \\ \hline 5.69 \end{array}$$

+ 28

$$\begin{array}{r} 11.93 \\ 8.0 \\ \hline 2.92 \\ 3.83 \end{array}$$

$$\begin{array}{r} 4.47 \\ 28.75 \\ \hline 23.22 \end{array}$$