

Book 5-10-10, Dr. 12

DIARY

PROJ. 33-W32

Monday April 24


Met "Bill" Hutson
contractor at West end of
job at 1 PM. Blazed
trees to be cleared and
grubbed to Sta 4+00
Someone is taking them
out for him, for the wood.
Walked over job with him
but didn't complete count
on trees and stumps.

Saw Mr Okme who
lives in bungalow Rt of
Sta 15 & 16. He didn't
realize that the ^{top of} cut would
come so close to his house.
thought he would come
into office to see if
any change is possible.

Hutson will not start
operations before 2 weeks

Wed Apr 24

3 men clearing and
grubbing 0+00 - 4+00

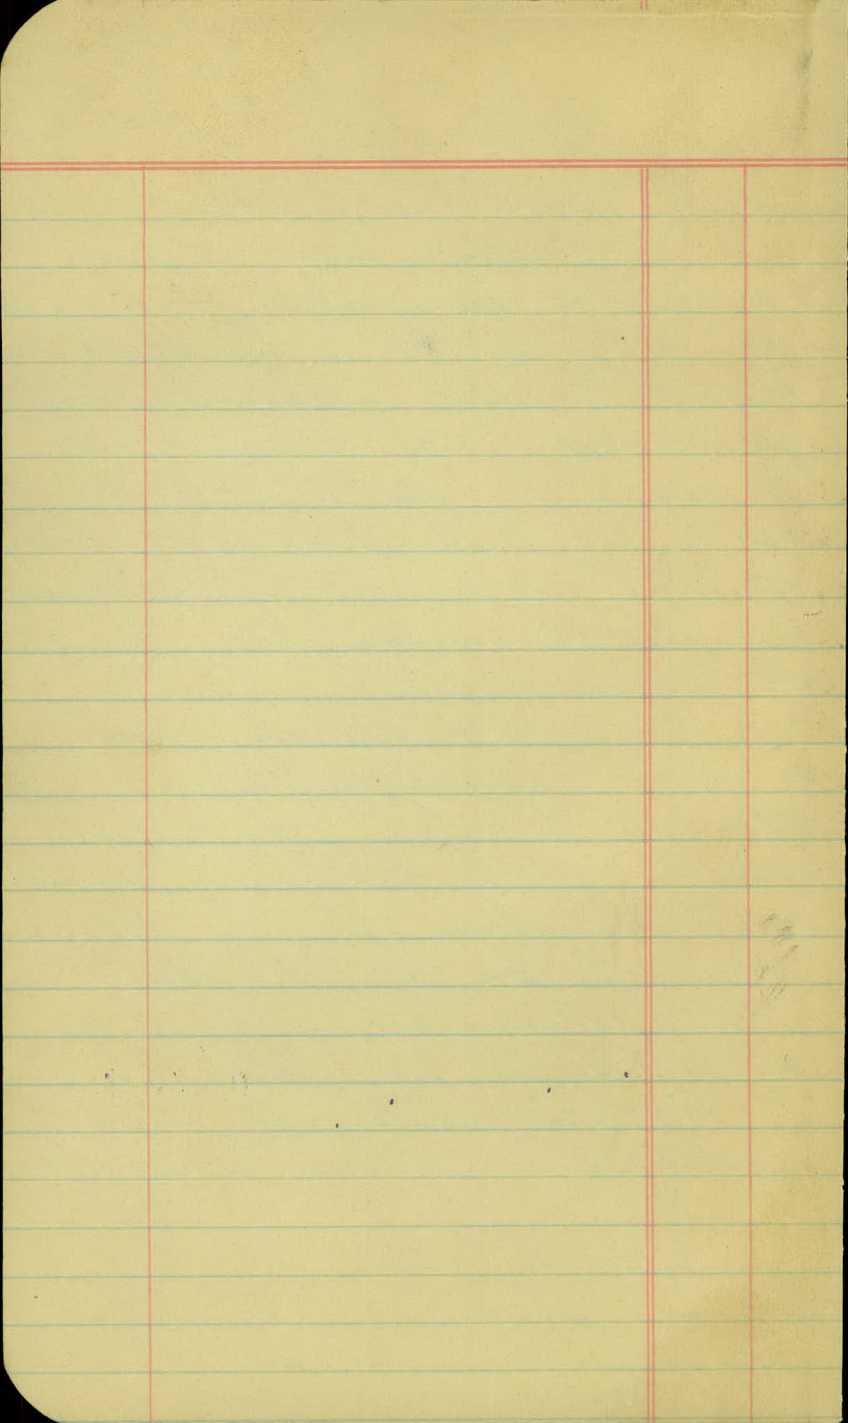

Clearing & Grubbing


Sto to St

Cl.

Grub

0+00	3+50	14 ✓	20 ✓
5+00	6+00		1 ✓
7+00	8+00		1 ✓
9+00	10+00		1 ✓
11+00	12+00		2 ✓
12+00	13+00		1 ✓
16+00	17+00	1 ✓	
17+00	18+00	6 ✓	
18+00	19+00	2 ✓	
19+00	20+00		1 ✓
20+00	21+00		1 ✓
21+00	22+00	1 ✓	2 ✓
		34	30
			19
			34

O.K. W.L. Watson

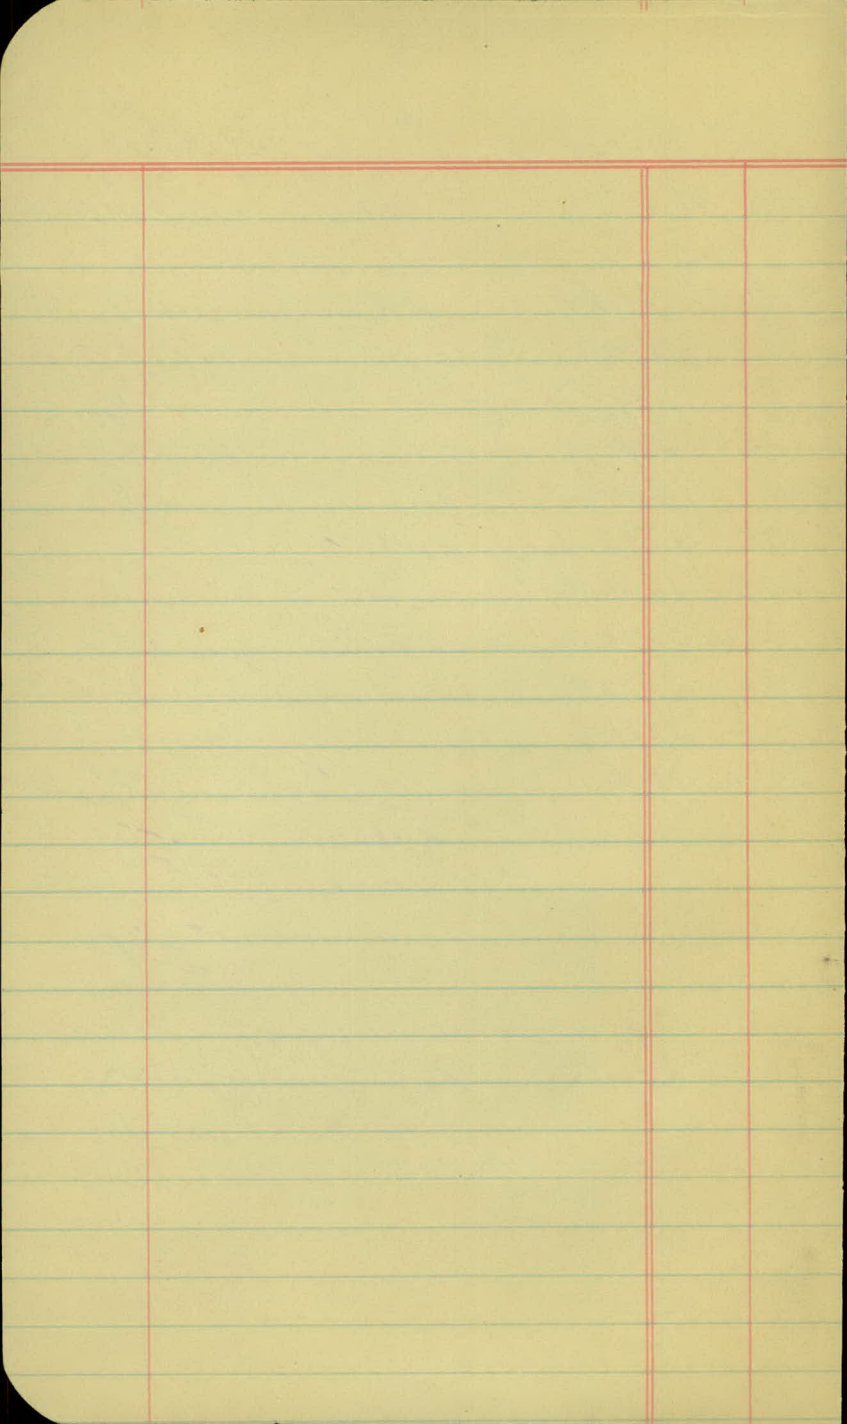


Thursday Apr 27

3 men clearing and grubbing.

John Mrs Morry ^{living} ~~the~~ left of Sta 16+00 and Mr Nordstrom. Both agreed to have their portions of fence on Sta 16+00 to end of job removed within 10 days.

Friday April 28

4 men clearing and grubbing. Cleared and grubbed 1 tree ft of Sta 0+90 that should have stayed. Hutson blazed it by mistake, then covered blaze with a board someone removed the board so down came the tree.

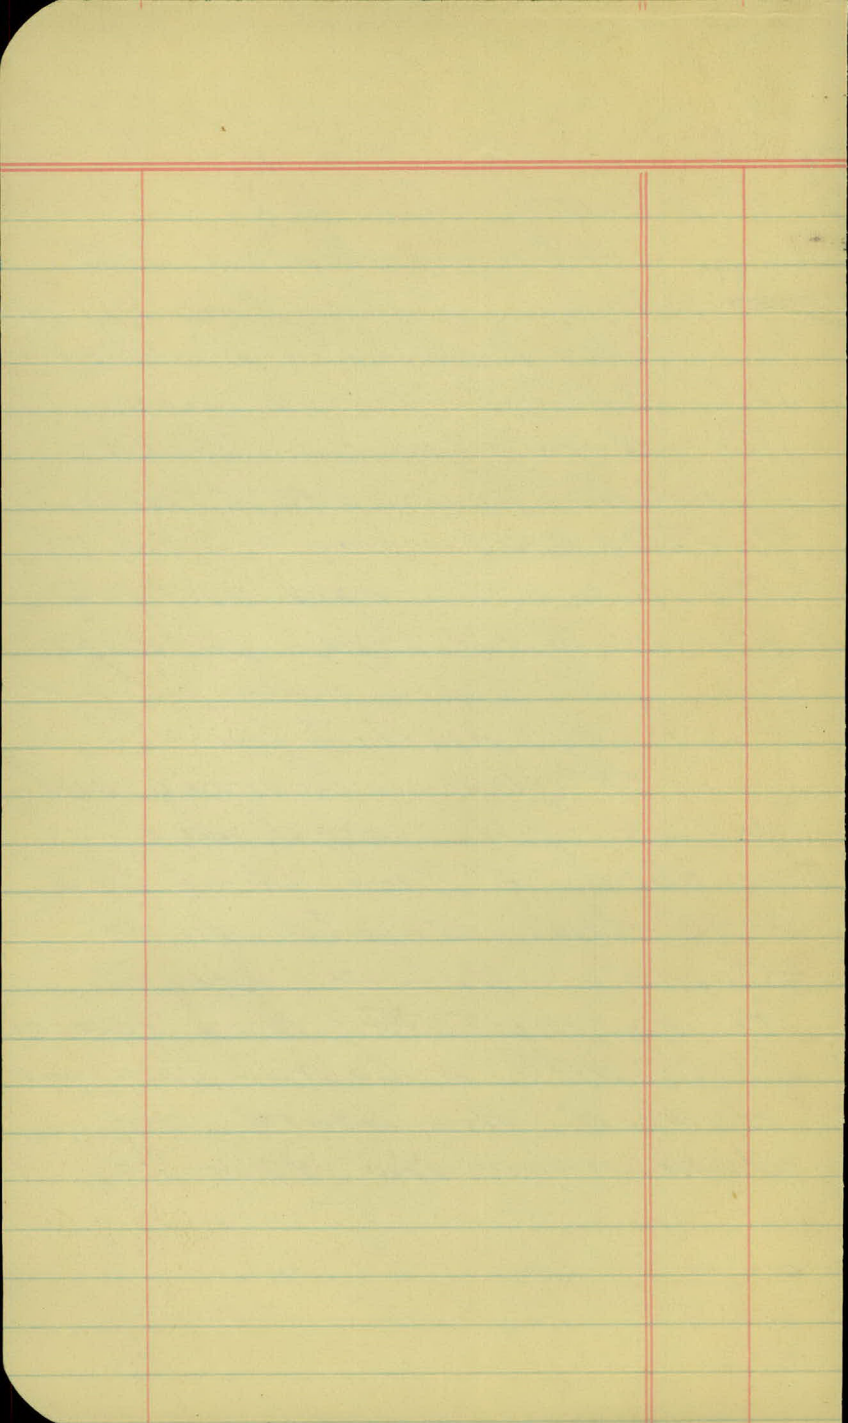

Saturday April 29.

Finally caught
up to men doing clearing
and grubbing for Hutson
they started work at
room today

B.H. Wernecke
Lenn. u

John Reese
Carl Bruns
Mr. Carter

These men are all
unemployed and taking
trees just for wood.

Sunday April 30
No work

Monday May 1

Met Mr Hoover
of Tel Co at 9 AM. Showed
him poles to be moved
because of hard ditch
on Rt Sta 5+00 to 11+50.
they will be moved before

Cloudy - cool

Cloudy - cold

Clear cool

Clear - cool windy

Hutson moves in.

Men cutting up trees
not at work at 10 A.M.

Nordstrom has crew
of four men moving
evergreens between Sta
27+00 & 27+50 on Rt.

Tues. ^{May 2} ~~Apr 2~~

5 men cutting
up trees previously
cleared and grubbed.
Sta 0+00 to 3+50

Wed May 3

5 men cutting
up trees previously
cleared and grubbed
Sta 0+00 to 3+50

Thursday May 4

4 men cutting up
trees previously cleared
and grubbed. Sta 0+00
to 3+50

Cloudy - cool - windy

Friday May 5
Man clearing &
grubbing finished last
night removing all but
stumps from between
Sta 0+00 to 3+50.

tel. poles on Rt between
Sta 5+00 and 11+50
have not been removed
as yet. Fence on E
between Sta 16+00 and
end of job is down
as far as Sta 21+00.

No activity on job today
With exception of pole
removals there will
be no more work on
project until Hutson
moves in.

Cloudy - cold

Cloudy - warm.

Cloudy - warm

Cloudy warm
Showers late

Tues May 9 ^{party}
Survey setting
slope stakes in
afternoon

Wed May 10
Survey party slope
staking all day

Thurs. May 11
Survey party on
job all morning and part
of afternoon. Tel Co
and N.J.P. Co. moving
poles today.

Hutson moved
Shovel and camp onto
job

Friday May 12
Hutson working Shovel
2 trucks and 4 men
Sta 1+00 to 4+00

Tel Co & Northern States
moving poles Sta 5 to
11+50 and 1 at 0+30

Clear - warm

Clear - warm

Clear - warm

Clear - hot

Saturday May ~~12~~ 13

Installed P³ culv
at Sta 3+50. 1 truck
broke down, so Hutson
didn't work in afternoon.

Man ^{Ed. Gervais} who owns filling
station Rt of 0+50 agreed
to take all the stumps
Hutson will pile in back
of his place.


Sunday May 14
No work.

Monday May 15

Shovel and 4
men & trucks working
Sta 0+00 to Sta 4+00

Tues. May 16

Finished shovel
work Sta 0+00 to Sta
3+00 and Moved to cut
From Sta 14 ahead
Hutson got a price
of \$16.50 for 190' of

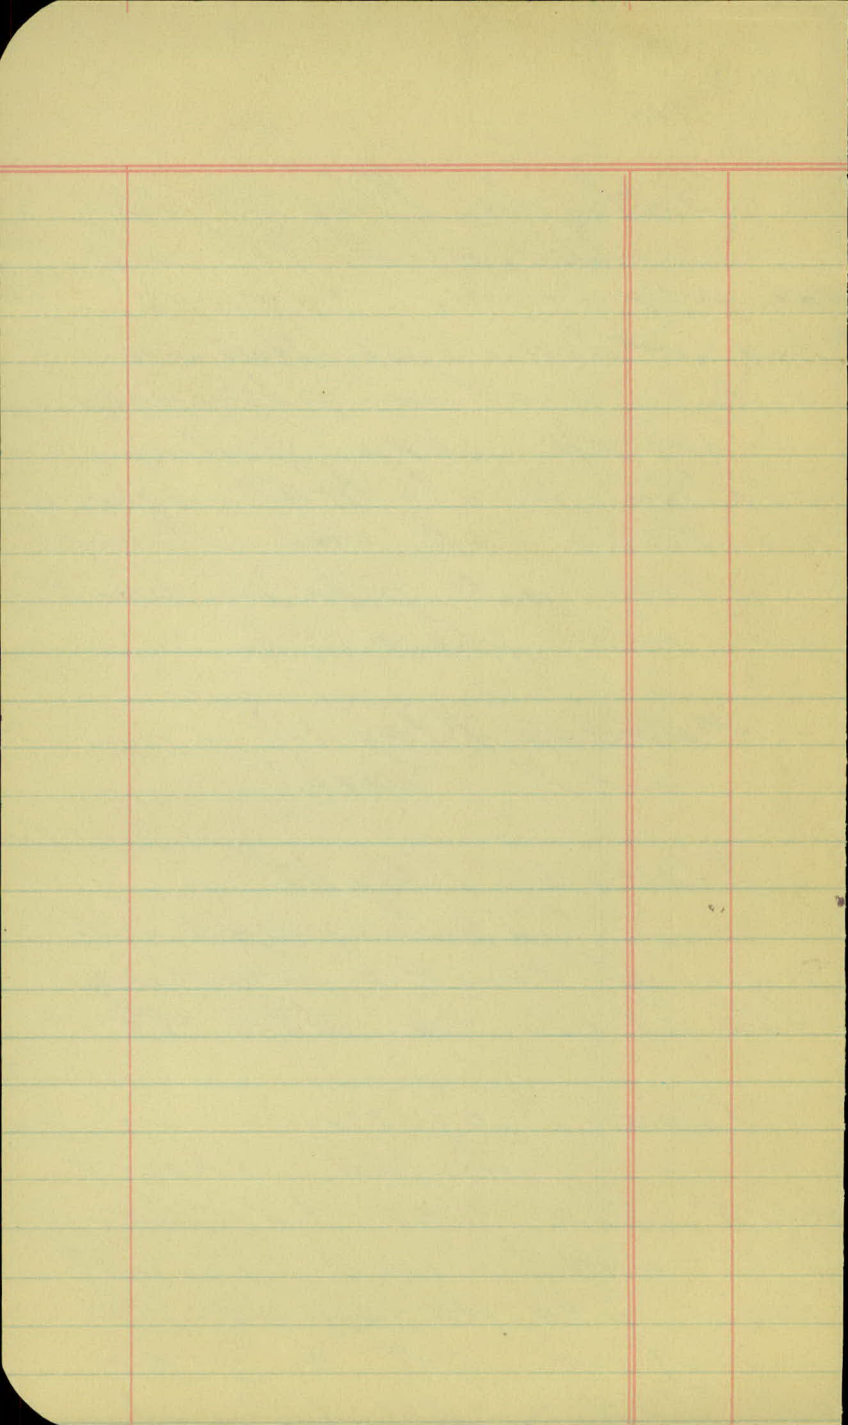

3X10 fir for plancking
30" P³ at \$to 12+30

"this price is OK with
"Van" so I told Hutson
to order the plank.

Van was on job today
and told Hutson to
excavate at culv. location
to a hard bottom. -

Force account with a
gas shovel, because
there is water 1' below
present level of earth
eliminating hand work
When material is removed
"Van" wants trench back-
filled with sandy clay
from cut at \$to 15+00.

Wed. May 17

Plenty of trouble
excavating for P³ at \$to
12+80 because of
water. Trucks broke
down about half day.

Clear. Hot

Clear. warm.

Shovel working in
cut Sta. 14 ahead.

Thur. May 18

Contractor

working all day installing
30" P₃ at Sta 13+30

Rained last night leaving
clay cut too slippery for
trucks. Assembled

cradle of 3X10 planks
on grade then dragged it
into trench with shovel.
(worked fine). Men worked
in 3' of water

5 men 4 hrs force acct
at \$40⁰⁰ per man hr. today
16.50 plank used.

Fri May 19

Rained hard
last night leaving grade
too slippery to work in.

Crew spent day rolling
and hauling soil from
Sta 16+00 to 18+00. Hauling

Clear - warm

Clear - warm.

Cloudy - cool - windy

Cloudy cool - windy
dust
|||||

To, and placing in back
yard of some property
Hutson owns in town.

Sat May 20

Hutson working
trucks and shovel all
day in cut 14+00 to
15+30

Sunday May 21
No work

Monday May 22

Working 2 trucks
and shovel cut Sta
14 to 15

Tues May 23

Working 2 Trucks
and shovel in AM - 3 Trucks
in PM on long haul.
In cut 14+00 to 15+86

Cloudy - warm - windy

Clear - warm

Cloudy - cool

Cloudy warm

Wed. May 24

Worked 2 trucks
and shovel in cut 14+0
to 15+86 most of
morning. Moved shovel
to Sta 17+83 to install
P3-24". Worked in
cut 15+86 East part
of afternoon

Thur. May 25

2 trucks and
shovel all day in cut
15+84 - 17+75. Partial
cut in today ~~and~~ including
this date.

Fri. May 26

2 trucks and shovel
all day Sta 17 to 30

Sat. May 27

2 trucks and shovel
all day Sta 17 to 33
Survey party on job
all morning - blue top

Cloudy started raining
at noon cont'd all day

Rained all day

Cloudy - cool

Clear warm

Clear - hot

Sta 13+50 to Sta 17+00
Staked driveway Lt of
Sta 15+85 and est.
probable loc of drive
to Rt at Sta 16+50
approx

Sunday May 28
No work

Monday May 29
No work

Tues May 30
Grade too wet
no work

Wed May 31
2 trucks and
shovel working today
in cut ~~from Sta~~ 20+00
to 22+00

Thurs. June 1
2 trucks and
shovel in cut Sta 22 to
25

Cloudy - windy - hot

Clear - hot

Clear - hot

Fri. June 2

Worked shore
and trucks in morning
Sta 23 to 27 and in
Morri's drive. Entire
force finishing across
swamp in afternoon
Sta 5 to 11

Survey party out in
afternoon blue tops
Sta 17+50 to 27+00

Sat June 3

Survey party on
job all morning blue
tops Sta 0+50 to 6+00
Hutson's force, exc
ditches and finishing
Sta 11+00 to 14+00

Completed exc in
Morri's drive today -
(quite steep.)

Sunday June 4


No work

Deer hotter in hell

Cloudy - hot.

Monday June 5
force taking
out ditch Left Sta
14 to 15 + 50 and
finishing as they go.
Over job with "Van" in
afternoon. Regarding
cut in front of
Oehme's - rt of Sta 15+50
"Van" suggests increasing
pitch of slope in the
upper strata of clay
thereby reducing pitch
of slope in lower strata
of sand. This cut is
going to cause the
~~cut~~ fit trouble some day
because of Oehme's
house being so close
to top of cut

Tues. June 6
Crew shaping
up Morris drive
and building fill for
Oehme's drive. Went

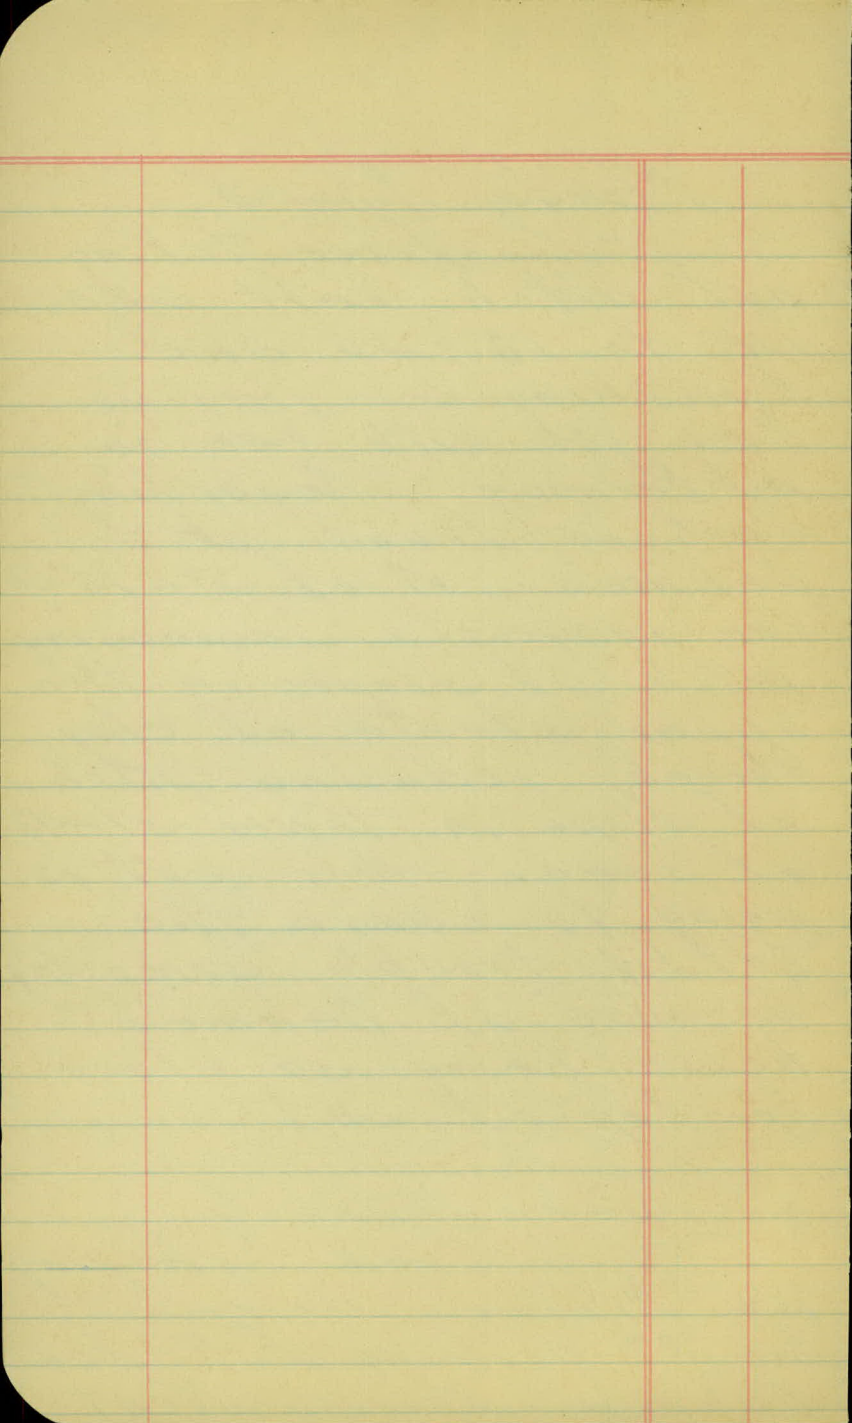

over job with Morris
and Nordstrom
regarding their respective
driveways to fields

Morris's property
requires 3 driveways
but only 1 ^{15" x 20' concrete} culvert

Nordstrom's 2 driveways
and 1 - 15" x 20' CM

Job requires 1 driveway
not on plan, requiring 1
15" x 20' CM Left of Sta
1460 OK'd by Jensen
of town board.

Jensen on job this
afternoon with P.R. Barnister
who is surveying proposed
town road running South
from Sta 244 on sec. line
Jensen says he is coming
into office to see Coates
regarding some sort of
construction to hold
slope from washing Sta
15+00 to 16+00 on Rt

Cloudy - hot

Cloudy cool

Cloudy - warm.

Clear very hot

Wed. June 7
Contractor taking
out ditches Lt Sta
21 - 23 and finishing.

Thur. June 8
Contractor taking
out ditches Lt Sta 23
to 25 and finishing.

Fri. June 9
Finishing Rt
and Lt in ditches
Sta 25+00 to 27+50
Shovel - 2 trucks - 1 laborer.
15" X 20" CM placed in
drive on rt 26+50
was a mistake of my
own. It drains about
25' of ditch.

Sat. June 10
Finishing ditches
and slopes Rt Sta
23+00 to 25 until 3 PM
Crew quit then. too hot

Clear - cool

Clear - cool

Clear - cool

Clear - cool

Sunday June 11
No work

Monday June 12
Installing CM's
in drives 26+60 Rt
and 15+85 Lt and
finishing. Also working
shovel and trucks in
excavation 14+00 to
20+00.

Tues June 13
Working shovel
and trucks, also some
finishing in cut 0+50
to 3+60. Worked couple
of hours in morning in
~~cut~~ ditches 15+00 to 16+
00 on Rt.

Wed June 14
Hutson exc
and finishing ditches
sta 0+20 to 4+00
Van on job in morning

Clear - Hot.

We saw Mr Jensen
(of town board) and
received his verbal
order to proceed on
constructing a retaining
wall Rt of Sta 14+50
to approx 15+60 the
cost to be in the
vicinity of \$100⁰⁰.

In afternoon I looked
for someone with a
pile of field stones
on their property but
haven't as yet found
enough. Stone to be
used in above mentioned
wall

Thurs. June 15
Force working
in cut Rt of Sta
14+00 to 16+00 ditch
and finishing
found Stone at
Snail Lake pit. for
wall 14+50-15+60 Rt.

Clear - very hot.

Clear very hot

Clear very hot

Fri June 16

Surfacing
road in sandy spots
with available clay
in today's excavating
Crew also finishing
Sta 10+00 to 17+00
and started exc in
hand ditch on rt
at Sta 11+00

Sat June 17

Exc. hand ditch
with shovel (on road wills)
today Sta 6+00 to 11+00
Lt. Met "Shorty" -
who is to do masonry
work on well 14.50 to
15.00 Rt. Expects to
start work next
Wed.

Sun June 18
No work.

Clear - damn hot.

Cloudy - hot

Cloudy - hot

Monday June 19

Shovel and
3 men exc. hand
ditch. 1 truck and
drier hauling field
stones for wall on
rt 14+50 to 15+60.

Tues June 20

Finished hand
ditch and touched
up bad spots in
grade. Hauling
rock for wall rt of
st 14+50 to 15+60

Wed June 21

Hutson finishing
today Van on job
saw it is complete
with exception of
few ^{high} ~~bad~~ spots in
ditches and completing
radius at Rice St.

Clear - hot

Clear - hot

Clear - hot.

Clear. hot

Thurs June 22
Hutson finished
grading this
morning and Van
went over job with
him and accepted
in afternoon.

2 men started work
on ret wall Rt of
Sto 14:50 to 15:40
this morning.

Fri. June 23

2 men on
ret. wall construction
Sto 14:50 to 15:50 P.M.

Sat. June 24

2 men on ret.
wall all day

Sunday June 25
No work

Clear - hot

Clear - hot

Clear - hot

Cloudy hot

Monday June 24

2 men working
on rat wall at of
Sta 14+50 to 15+50

Tues June 27

2 men on
rat wall at Sta 14+50
to 15+50.

Wed June 28

2 men on
rat wall at of Sta
14+50 to 15+50

Acme Const Co
started guard rail
today. 3 men - 1 truck

Thurs June 29

2 men on rat
wall at 14+50 - 15+50

3 men and truck
stringing guard rail
cable and cutting
and topping posts.

Clear - hot.

Surrey party
taking photos today

Cloudy - hot

Clear - warm

Fri. June 30

1 man working
on rat wall at of sta
14:50 to 15:50 - used
all stone delivered on
job and Hutson cannot
haul more until Sunday

3 men completed
guard rail today.

1320 lin fit

5 dummy posts

Sat. July 1

Turkey party
taking final X sections
No work on wall today

Sunday July 2

Truck and
driver hauling 4 loads
about 10 c.m. of field
stones for completing
rat wall on at
Sta 14:50 to 15:50

Clear - hot

Clear warm

Clear warm

Clear warm

Mon July 3
I men on
ret. wall

Tues July 4
No work

Wed July 5
I men completed
laying wall. Touching
up. remaining.

Thurs. July 6
I men finished
wall today. Called
Watson and told
him he could back-
fill ditch now.
He will be on job
Friday.

Fri July 7
No work

Sat July 8
No work

Cloudy warm

Cloudy - raining.

Cloudy - cool

Sunday July 9
2 truck &
4 men on job.
re-constructed shoulder
and ditch 5 to 14
to 16 on Rt. Complet-
ed wall contract
today.

Monday July 10
About 1 1/2
59 yds of wall
washed out because
of insufficient mortar
to hold stones in a
miniature cloud burst


Tues July 11
Saw Hutson
in office in A.M.
Says he will repair
wall today.

At time I saw
Hutson I was not
aware of the fact
that the rain of

Clear-hot

early this morning
had done considerably
more damage by
pushing about 1
third of the wall
out of line and
loosening more stones
because of insufficient
mortar binding.


Wed July 12
Shorty Walton
back on job today
but his work is lousy
he won't do anything
the way it should be
done. Called
Hutson to have him
can the bastard
but he was on job
in Stillwater so
talked to his wife
instead (She runs
the outfit anyway)
She says not to
monkey with Shorty

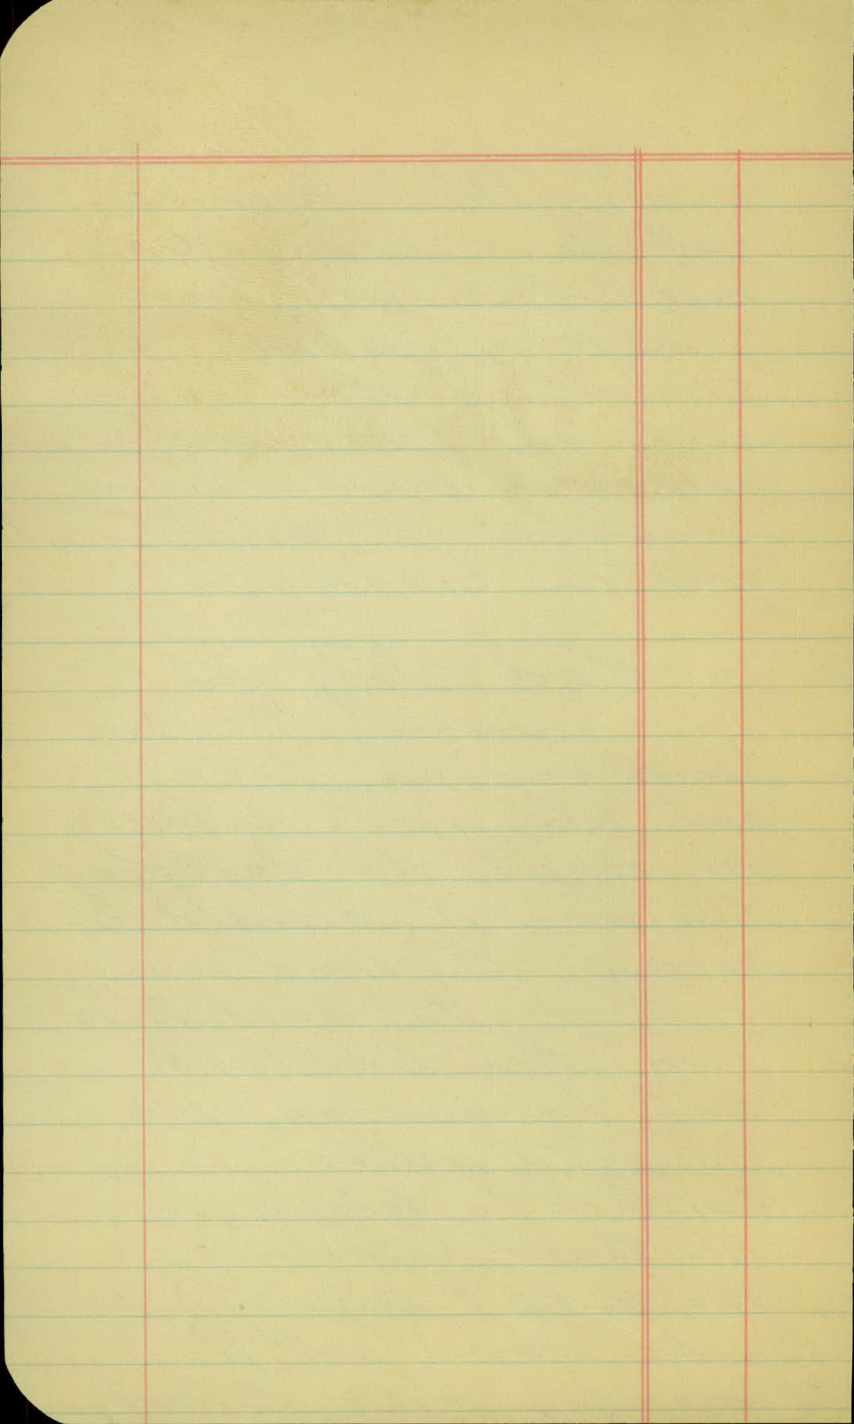

at all because she
always has considered
Bill was nuts ~~to~~ to
have such a poor
workman around.

Thurs July 13
To Hell
with the god damn
well - my wife gave
me a nice big baby
daughter today -

Friday July 14
Hutson on the
job yesterday. He
fixed Shorty so there
is no work on the well
today. When Hutson
finishes the job
he's on in Stillwater
he plans on putting
his entire force on to
properly fixing the
well

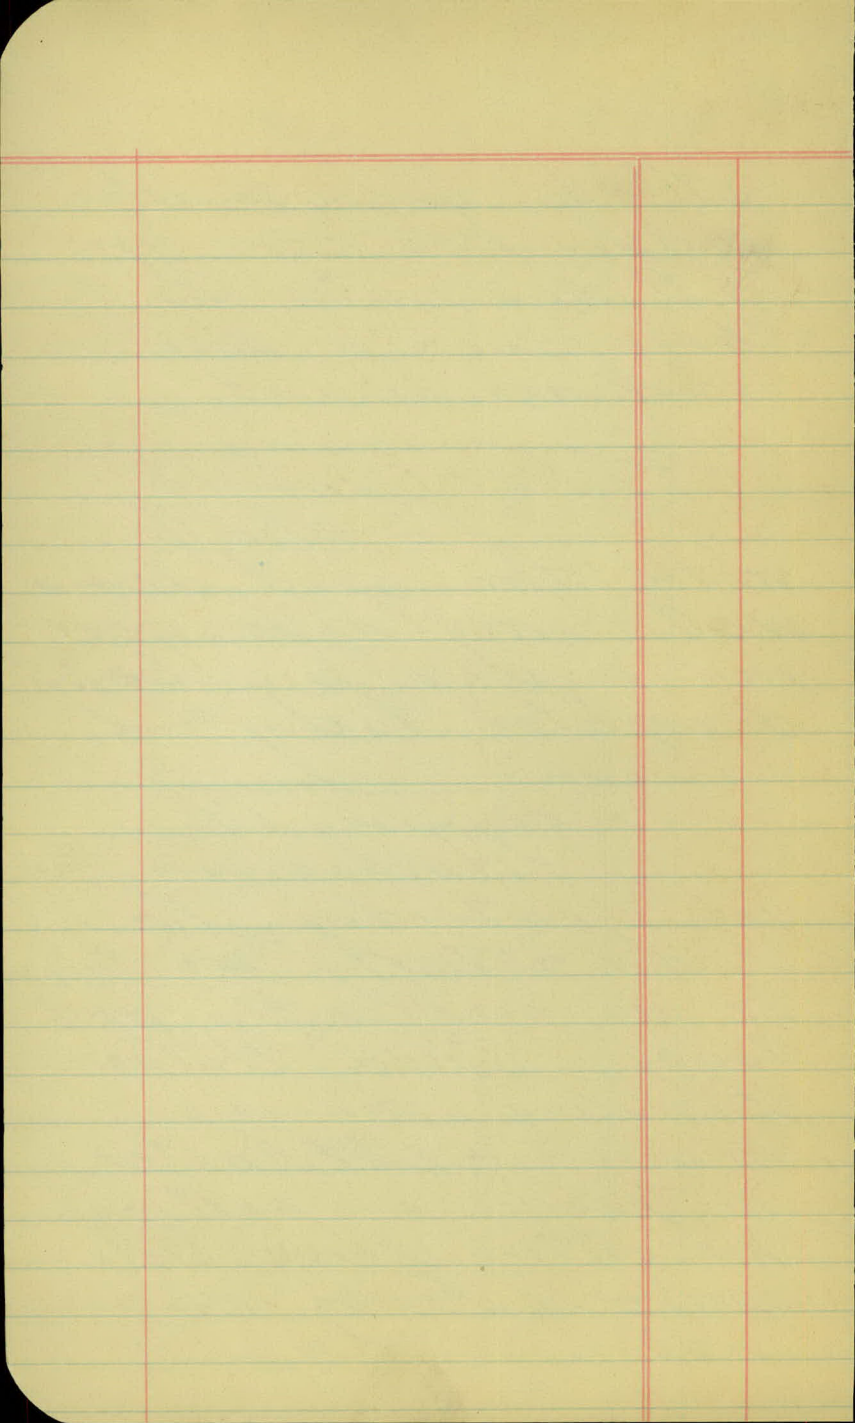

Sat July 15

No work

Sunday July 16

No work


Monday July 17

No work

Tues July 18

Hutson on job
with crew of 4 were
repairing wall and filling
all joints with mortar
the lines of the wall
are still terrible.

The only way this wall
could possibly look right
would be to tear it
down completely, and
rebuild

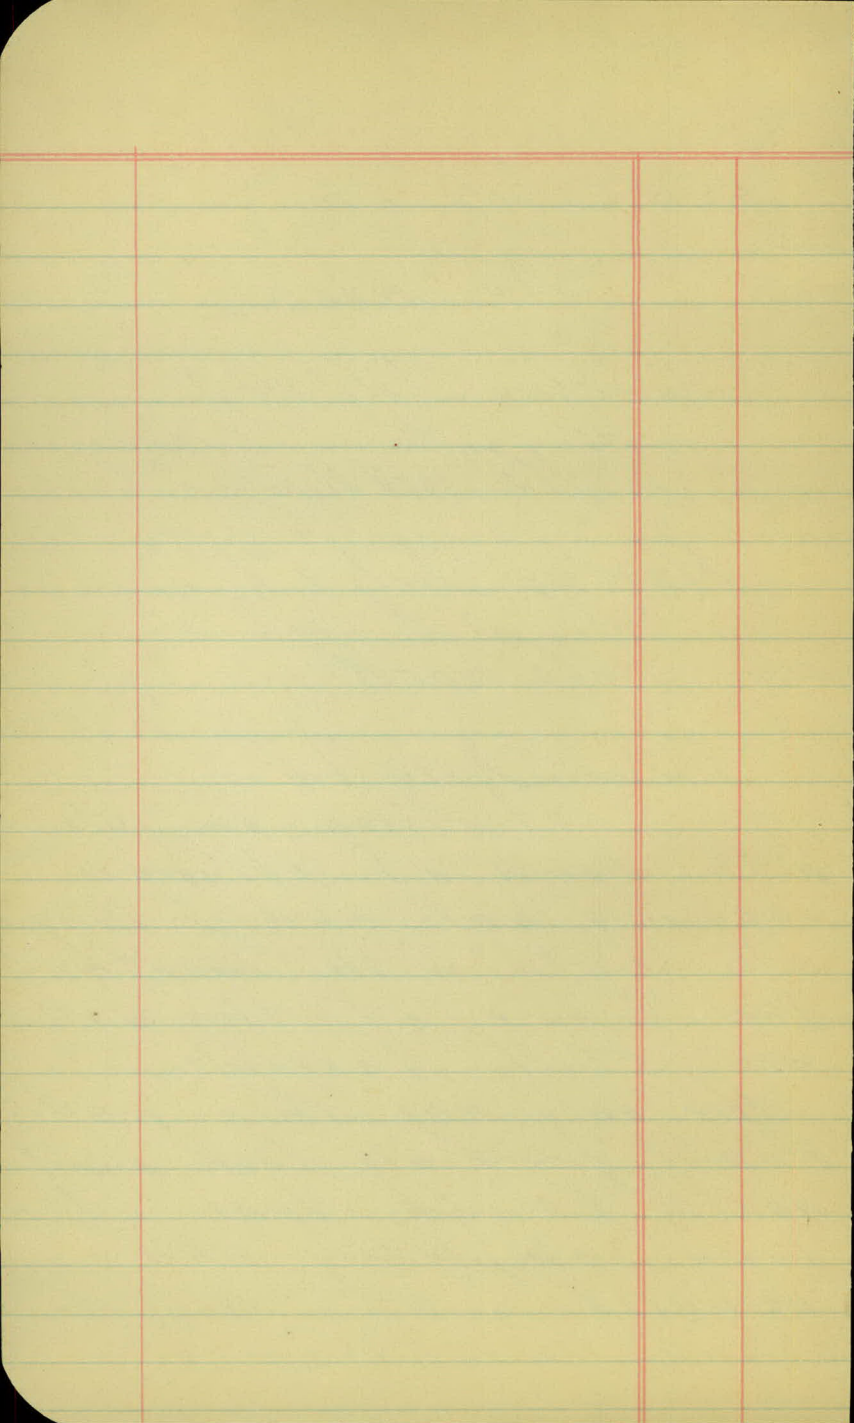



Standard Memorandum Book

Ruled \$ and Cts.	Ruled Faint	Ruled \$ and Cts. indexed Through	Size	No. of Leaves
6310	6311	6310 $\frac{1}{2}$	5 $\frac{1}{2}$ x 3 $\frac{1}{2}$	48
6312	6313	6312 $\frac{1}{2}$	"	96
6316	6317	6316 $\frac{1}{2}$	6 $\frac{3}{4}$ x 4 $\frac{1}{2}$	48
6318	6319	6318 $\frac{1}{2}$	"	96
6320		6320 $\frac{1}{2}$	"	144
6322	6323	6322 $\frac{1}{2}$	7 $\frac{3}{4}$ x 4 $\frac{3}{4}$	48
6324	6325	6324 $\frac{1}{2}$	"	96
6326		6326 $\frac{1}{2}$	"	144
6328	6329	6328 $\frac{1}{2}$	8 $\frac{3}{4}$ x 5 $\frac{1}{2}$	48
6330	6331	6330 $\frac{1}{2}$	"	96
6332		6332 $\frac{1}{2}$	"	144

Specify by Number, the Book desired

Made in U. S. A.

B&PNº 6322