

3070

Sun. Aug 10,

Fair & Cool.

Bill Mohr took 4
labours to the bridge
and stopped the length
wall in order to be
prepared for the stone
run on Monday

Mon. Aug 11
Fair & Cool.

6 masons started
work this morning on
the no. walls.

3 men cutting stone for
racking.

Out of 9 laborers
stripping walls and
cut back forms.

Tue. Aug 12.

Pair Roof

Same crew as yesterday
Mac out today and
said that he did not
want so many small
stones in the wall.

Mr. Bates was to be
on the job this afternoon
to inspect stones
but he did not come.

I left the job at
5:15 P.M.

Wed Aug 13

Fair - Cool.

6 masons on north wall of bridge.

Mac came out this morning and said that Mr. Coates had looked at the stone work and told us to get a combination of the center and east end of the wall, the west end being N.G.

Finished putting up forms under east arch today and found it to be all right.

Thurs. Aug 14

Fair - Hot

Still working on north wall. 4 men stripping west arch & men stripping inside of walks.

Asked Mohine when the bridge would be ready for the grading contractor and he said the 1st of Sept.

Told Mohine that the final coat of waterproofing must be asphalt as specified, as per Mac's instructions.

Fri. Aug 15

Fair & Hot

Same crew.

I went over to Proj
30-11 with Mac and
relocated a culvert.
Came back to job and
Mac said that yellow
color must be knocked
off of stone before
using instead of after.

Found a few bad
spots in west arch
and had them grouted.
Machine wanted to place
coping on all 4 sides
of pier, I call Mac
and he said O.K.

Sat. Aug 16

Fair - Hot.

Same crew

Had much trouble
this morning because
of stone not being
large enough. We
had more stone brought
out and it was better.
Mac out this morning
to look at wall. He says
that we want to have
south face look like
the portion of the north
face over center pier.

Left job at noon to
go to Sedona on a
fishing trip with Mac.

Sun. Aug 17
Fair Cbl.

2 trucks hauling
rock from 3rd St.

Mon. Aug 18

Fair & cool
Finished stone work
on No. wall today and
started north refining.
I told Moline that the
expansion joint went up
thru the cracking but he
said the m/c had told
him to stop it at the
bottom of the rail.

Mac said the yellow
stone could be used if
the yellow was trimmed
off before using

Fri Aug 19
Cloudy - Warm

8 masons working today 6 on north railing and 2 on south wall. 3 cutters, 1 carpenter and 8 labourers.

I noticed a slight bump in the grade back of the north wall. Bull Moline says he will cut it down.

I went to the office and talked to Mac about making piers between denials larger but he wants to abide by the present plan.

Mac out today and wants a panel finished up but this is hard to do account of having so many masons at work.

Wed. Aug 20

Unsettled - Wgny

Same crew as yesterday

I went to the office this morning to see Mac, and he said that he could not remember telling Wgny to stop the expansion joint at the pattern of rebar. He told me to have stone moved and joint put in. Having much trouble about color of stone

Thur Aug 21

Fair - hot.

Machine started to
cut arch with machine
this morning, but I
had to stop him on
account of stone digging
in too deep.

Mac came out at
noon and we decided
to have it rubbed by
hand and leave the
board marks.

Bill, Machine and Mac
had quite a discussion
about water proofing.

Decided on spraying
the primer coat and
using asphalt for the
final coat.

Friday Aug 22
7:45 - Hot

2 laborers rubbing west
arch, 4 masons and three
laborers on north raking
4 masons and three laborers
on south face.

Bill Mohr laying coping
on north wall.

Reminded Bill again
that grading contractor
would start on Sept 2

Sat Aug 23


Fair - Warm

Same crew as
yesterday.

Had an argument
with Mphie this morning
over him on stems. He
said that if they were
bad looking he would
wash them with a
solution of acid.

Mac. out this morning
and went over job, he
wants to have west arch
re-rubbed to make it
uniform.

Mr. Coates out this
morning and looked
over the job, he criticized
several stems which were
crooked, but otherwise
seemed to be satisfied.

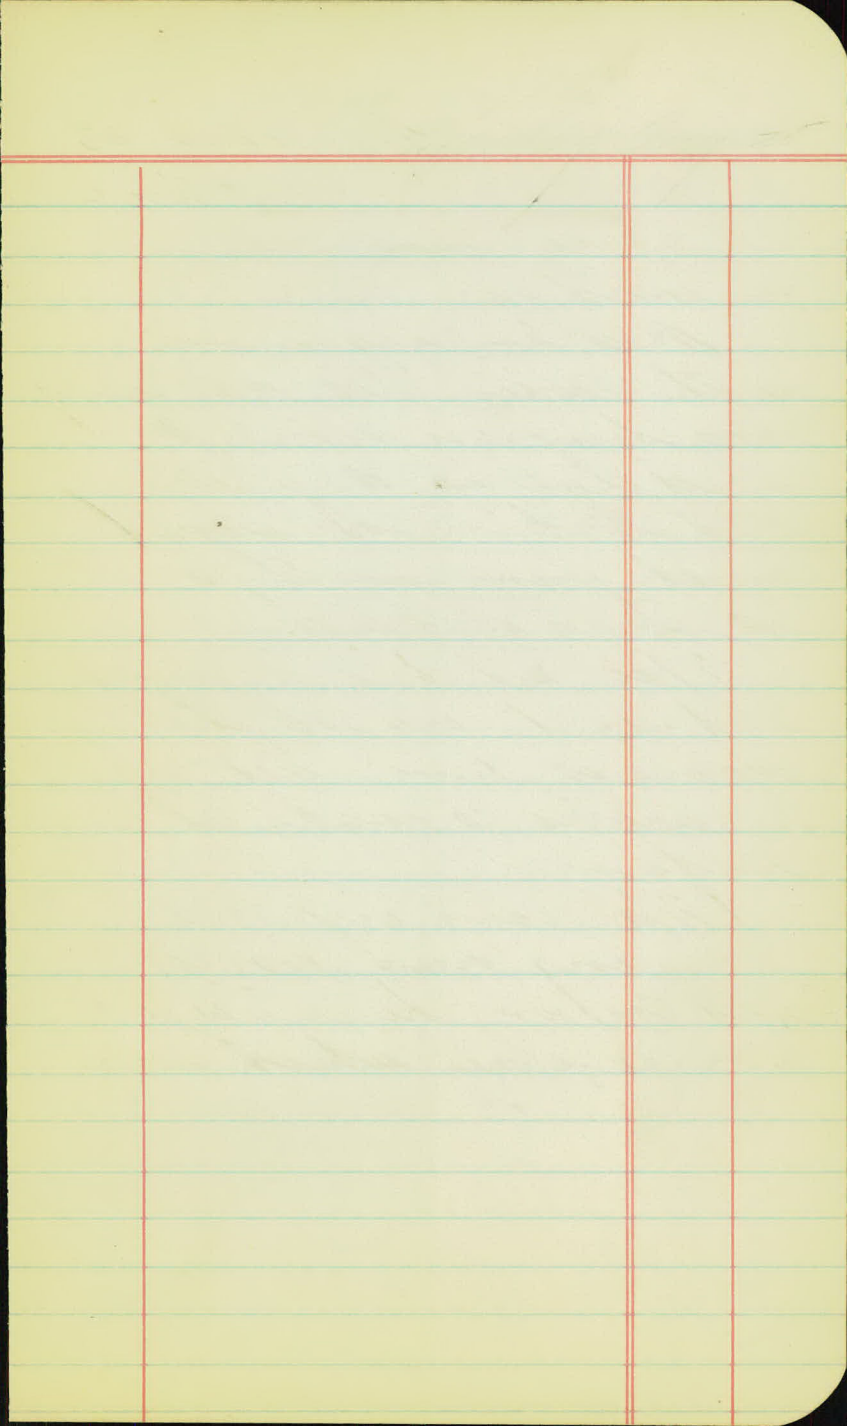

Monday Aug 25

Fair - Hot.

3 Stone cutters, 3 masons,
10 laborers and 1 carpenter
Masons finished on
north walling today and
started to work together
on south face.

Talked to Bill about
fencing and he thinks
that I have to have a
week in Sept.

Went to office at
noon and saw Mac
he wants platform built
outside of well to bury
water pump's

Spent half of the
afternoon in office
making up monthly report.

Jul Aug 26
Fair & hot.

2 masons left job
this morning because
of a dispute over wages.
Otherwise the same crew.

Mohr had a truck
load of stone sent out
this morning which
was not good, Mr
Coates examined it
and said not to use
it.

Mac out at noon
and said that we had to
have stone of the same texture
and dimensions for south
rail as that used in north
rail.

Mac criticized the stone
in west end of south wall
told me to have it removed
if not horizontal.

Wed. Aug 27

Showers.

Considerable trouble
in getting stone. After
talking to Mac, I
suggested to Mepin that
he had better go out the
water-proofing and
post found the rest of the
masonry until after
the bucket was filled.
He said he would if
he had to go back to
the quarry.

Had several times
during the day of rain
totaling about an hour.

Quit at 2:30 P.M.
of steady rain

Thur Aug 28

Fair - Hot.

Masons completed
south wall and started
on rail.

Talked to Bill about
waterproofing and he said
that he would work the
crew all day Saturday and
Sunday and be ready for
waterproofing on Tuesday
morning.

Fri Aug 29
Fair Hot

Masons working
on south railing.
Mohr had some
rock hauled out today
which was off color
and I told him
not to use it.

Contractor was having
trouble in opening up
pipes thru counter-joints
and asked me if he
could put saddles
of conc. in instead.
I told him this would
be O.K. but we would
not pay anything
extra for it.

Sat. Aug 30

Fair & Hot

Same crew as
yesterday.

I went to the office
and talked to R. J. W.
about leaving the job
for Sunday and
Labor day, he said it
was O. K. as I thought so
and I left for the
lake at 4:30 P. M. will
be back on Monday.

Sun. Aug 31,
Fair - Cool

Foreman and 5
labours cleaning top
of arches and preparing
for water proofing.

Mon. Sept 1
cloudy-cool

Labor Day
no work.

Tue Sept 2

Fair - Warm

Back to job this morning and found 2 masons laying coping stones, having run out of mat'l. for the bell course.

Went over arches with Al and showed him some spots to be fixed before waterproofing.

Wac out this morning and told me to have the six vertical joints in the walls covered with fabric, this to be paid for with an unclassified order.

Wed Sept 3

Fair - Warm.

5 masons on job today and 2 stone cutters. Mokin had 2 men washing north wall started using muratic acid in a weak solution and it worked good for a while, Maf got out and looked at it and thought it all right but after setting about 2 hrs. the stone turned yellow in spots. stopped using acid and used water and were brushed.

Mr. Bates out in P. M. and inquired about extras on job. He seemed to be satisfied with the job.

Thur. Sept 4

Fair - Warm

Mokine had 5 masons
and 2 stone cutters on
job today, working
on north rail.

Had a man rubbing
burned stones with
wire brush but the
result was not so
good, so had him
stop.

Fri. Sept 5

Fair - warm

Finished the south
railing except capping
and laid off all but
2 masons.

Roofing men out
today and measured up
the bridge for waterproofing

Sat Sept 6

Fair - Warm
Finished stone work
today.

Mac came out and
told me to buy some
caulking cement for
the joints in the masonry
and have Melin put it
in by force account.

Roofing man out today
and says he will start
Monday

Sunday Sept 7

Fair - Warm

Happened to drive
over job today and
found that Mohr had
5 men rubbing west
arch, and 2 men
priming the top of the
bridge

Mon. Sept 8

Fair - Warm

Small crew cleaning

up. Had a man start
caulking joints

Water proofers started
placing fabric

Tue Sept 9

Fair - warm

Crew spent the day
cleaning up and
removing temporary
filings from the canal
One man caulking
joints.

3 men placing
fabric, 1 man painting
walls.

Wed. Sept 10
Fair Warm

Had three men on
Mokini's crew today, clearing
up and poured the gutter
under the east arch.

I tried to agree with
Mokini about the water
proofing the vertical
joints, but he would
not sign on a force
account basis.

Had a man start
sorting over the stones on
top of the hill.

Thur. Sept 11.

Fair - warm
Molin had three
men on the job today
cleaning up and
getting ready to move
Roopers working
forman and three
men. Finished west
arch and got a good
start on the east arch.

Made an agreement
with Bill Molin to
cover the joints by
force account Issue
Council order no. 3

Mr. Coates and members
of the board out in
P.M.

Fri. Sept 12,

Fair - hot

Molin had three
men on job cleaning
up.

Contractor told me that
he would return when
the bridge was filled
to chip off the stones
which were covered by
the water-proofing
& men placing
fabric on east arch

Sept. Sept 13

Fair Warm

Forman and 3 helpers
placing fabric water
proofing today on
east arch.

Mon. Sept 15

Fair Warm.

4 men waterproofing
Mac out today and
he wants conduit pipe
at N.W. cor. cut off.
flush with the cap
stone

Tue. Sept 16

Fair - Warm

4 men water proofing
today on east deck.

Wed. Sept. 17

Fair - Warm

3 men on the water
propping crew today and
they completed the job.
The bridge is now
complete.



Standard Memorandum Book

Ruled \$ and Cts.	Ruled Faint	Ruled \$ and Cts. Indexed Through	Size	No. of Leaves
6310	6311	6310 $\frac{1}{2}$	5 $\frac{1}{8}$ x 3 $\frac{3}{8}$	48
6312	6313	6312 $\frac{1}{2}$	"	96
6316	6317	6316 $\frac{1}{2}$	6 $\frac{1}{8}$ x 4 $\frac{1}{8}$	48
6318	6319	6318 $\frac{1}{2}$	"	96
6320		6320 $\frac{1}{2}$	"	144
6322	6323	6322 $\frac{1}{2}$	7 $\frac{3}{8}$ x 4 $\frac{3}{8}$	48
6324	6325	6324 $\frac{1}{2}$	"	96
6326		6326 $\frac{1}{2}$	"	144
6328	6329	6328 $\frac{1}{2}$	8 $\frac{3}{8}$ x 5 $\frac{1}{2}$	48
6330	6331	6330 $\frac{1}{2}$	"	96
6332		6332 $\frac{1}{2}$	"	144

Specify by Number, the Book desired

Made in U. S. A.

B&PNO F322

2521