


102

102

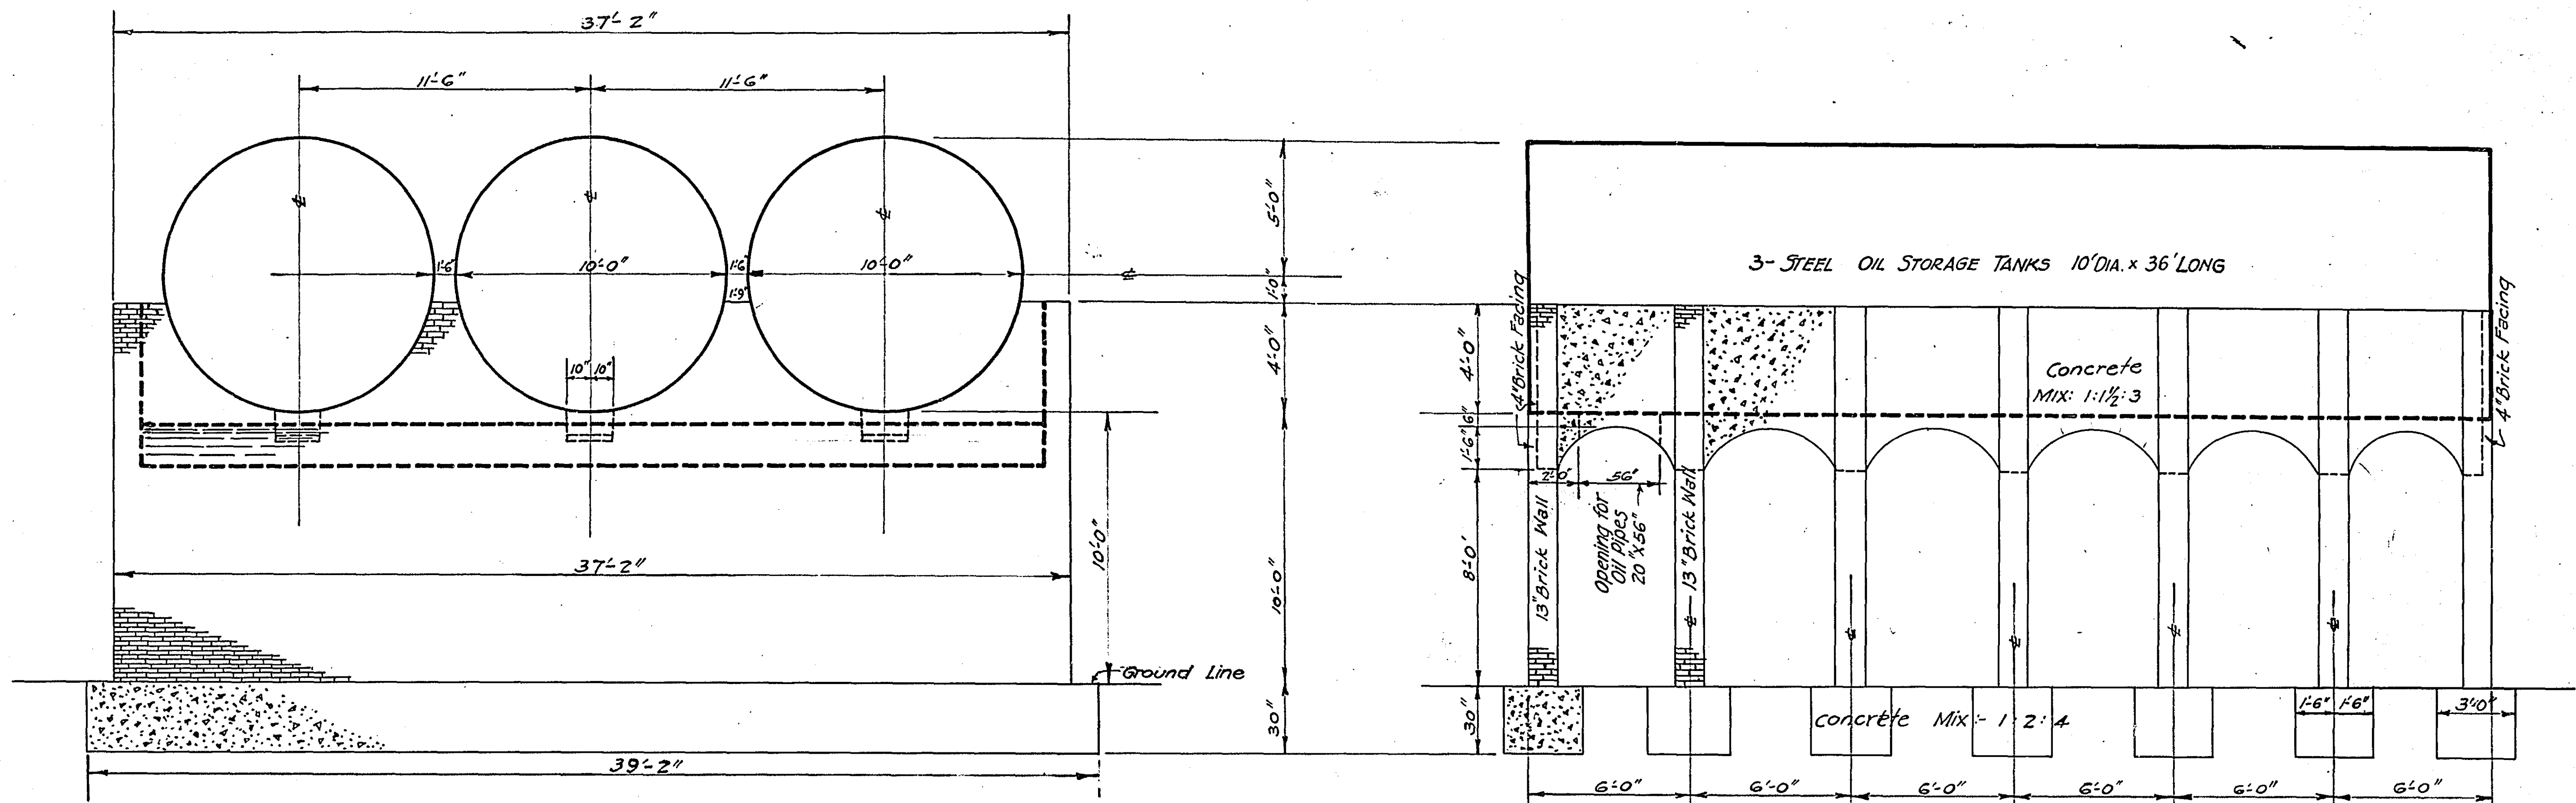


END ELEVATION OF PEDESTAL FOR OIL STORAGE TANKS

SIDE ELEVATION

- BILL OF MATERIAL**
- 2,156 Sq. Ft. of 13" BRICK WALLS.
 - 420 Sq. Ft. of 4" BRICK WALLS.
 - Total 51,870 Bricks.
 - Concrete Bed for Tanks
 - 83 Cu. Yds. Concrete 1:1½:4 MIX.
 - Concrete Footing 76 Cu. Yds 1:2:4 Mix.

PLAN OF PEDESTAL
 FOR ROAD OIL STORAGE TANKS
 AT LEXINGTON AVE. AND LAKE JOHANNA RD.
 OFFICE OF COUNTY SURVEYOR. MAR. 11, 1921
 NO SCALE.

J.H.M.

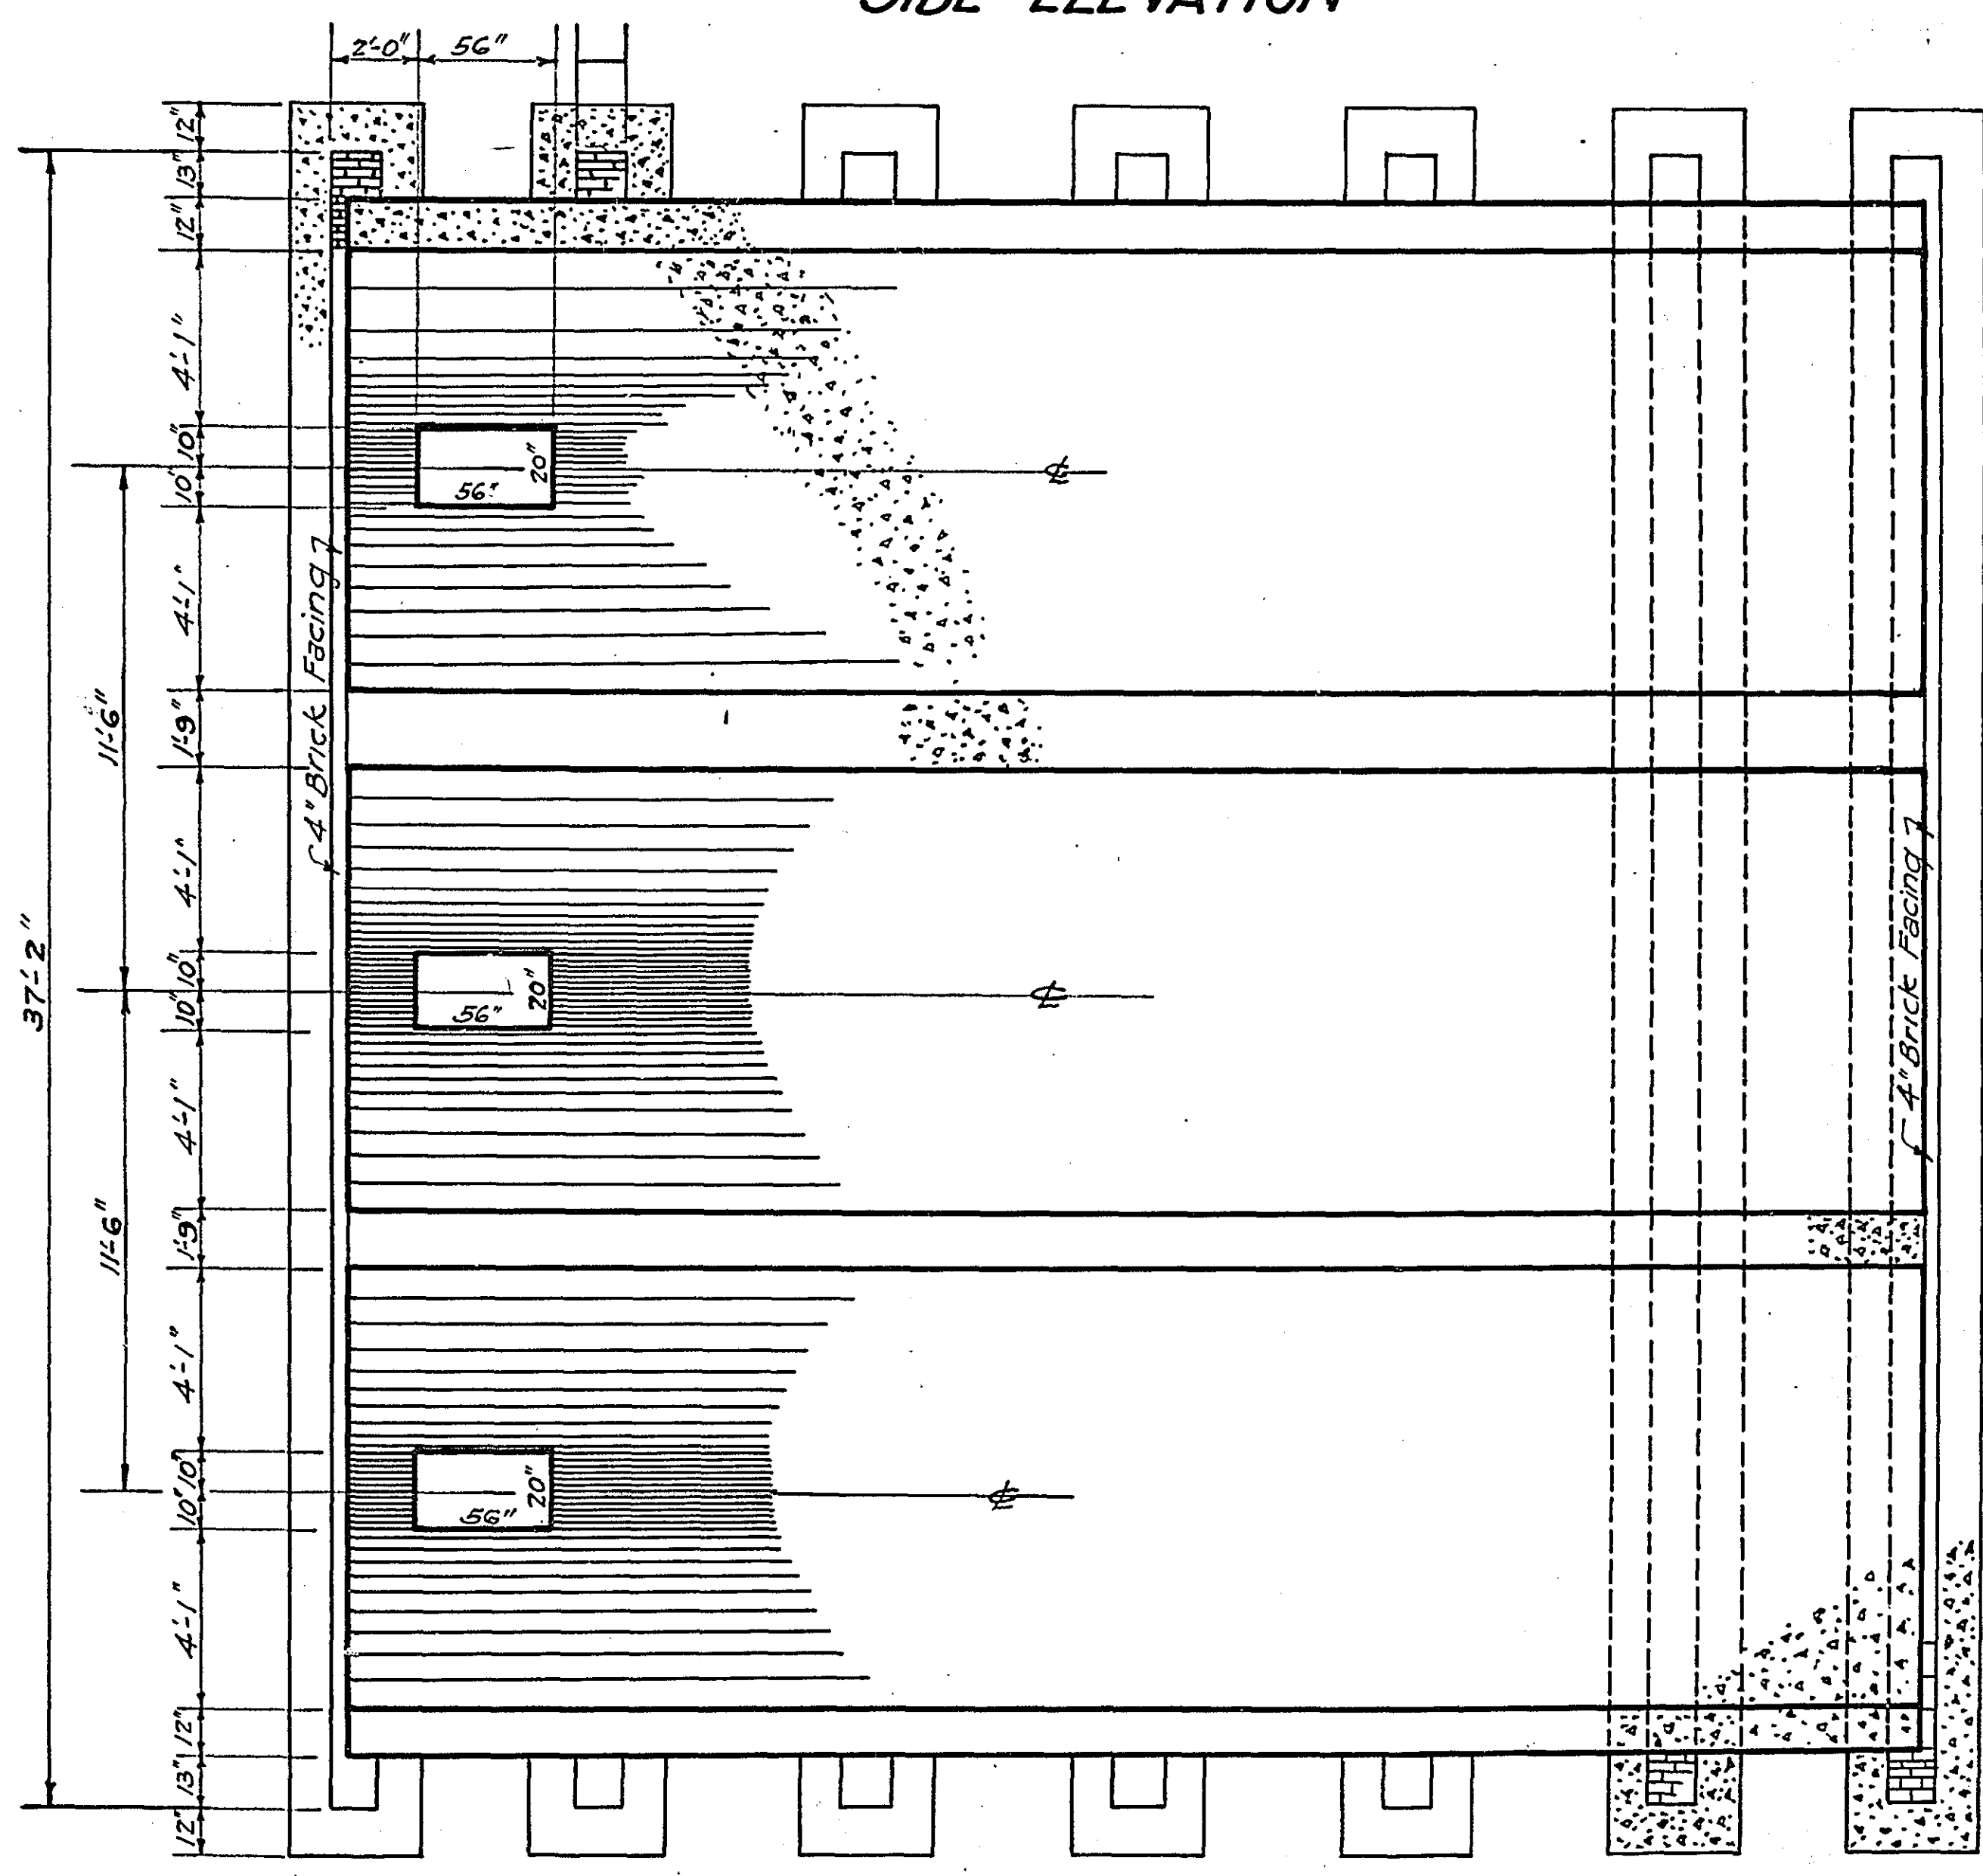

TOP VIEW OF PEDESTAL

102

102

MICROFILMED
RAMSEY CO. ENGR.