


RAMSEY COUNTY ENGINEER'S OFFICE CONSTRUCTION PROFILE RAMSEY COUNTY

COUNTY PROJECT No 23-65

EUSTIS ST.~BETWEEN COMO AVE+LARPENTEUR AVE

Sta. 0+00 to Sta. 16+23.8

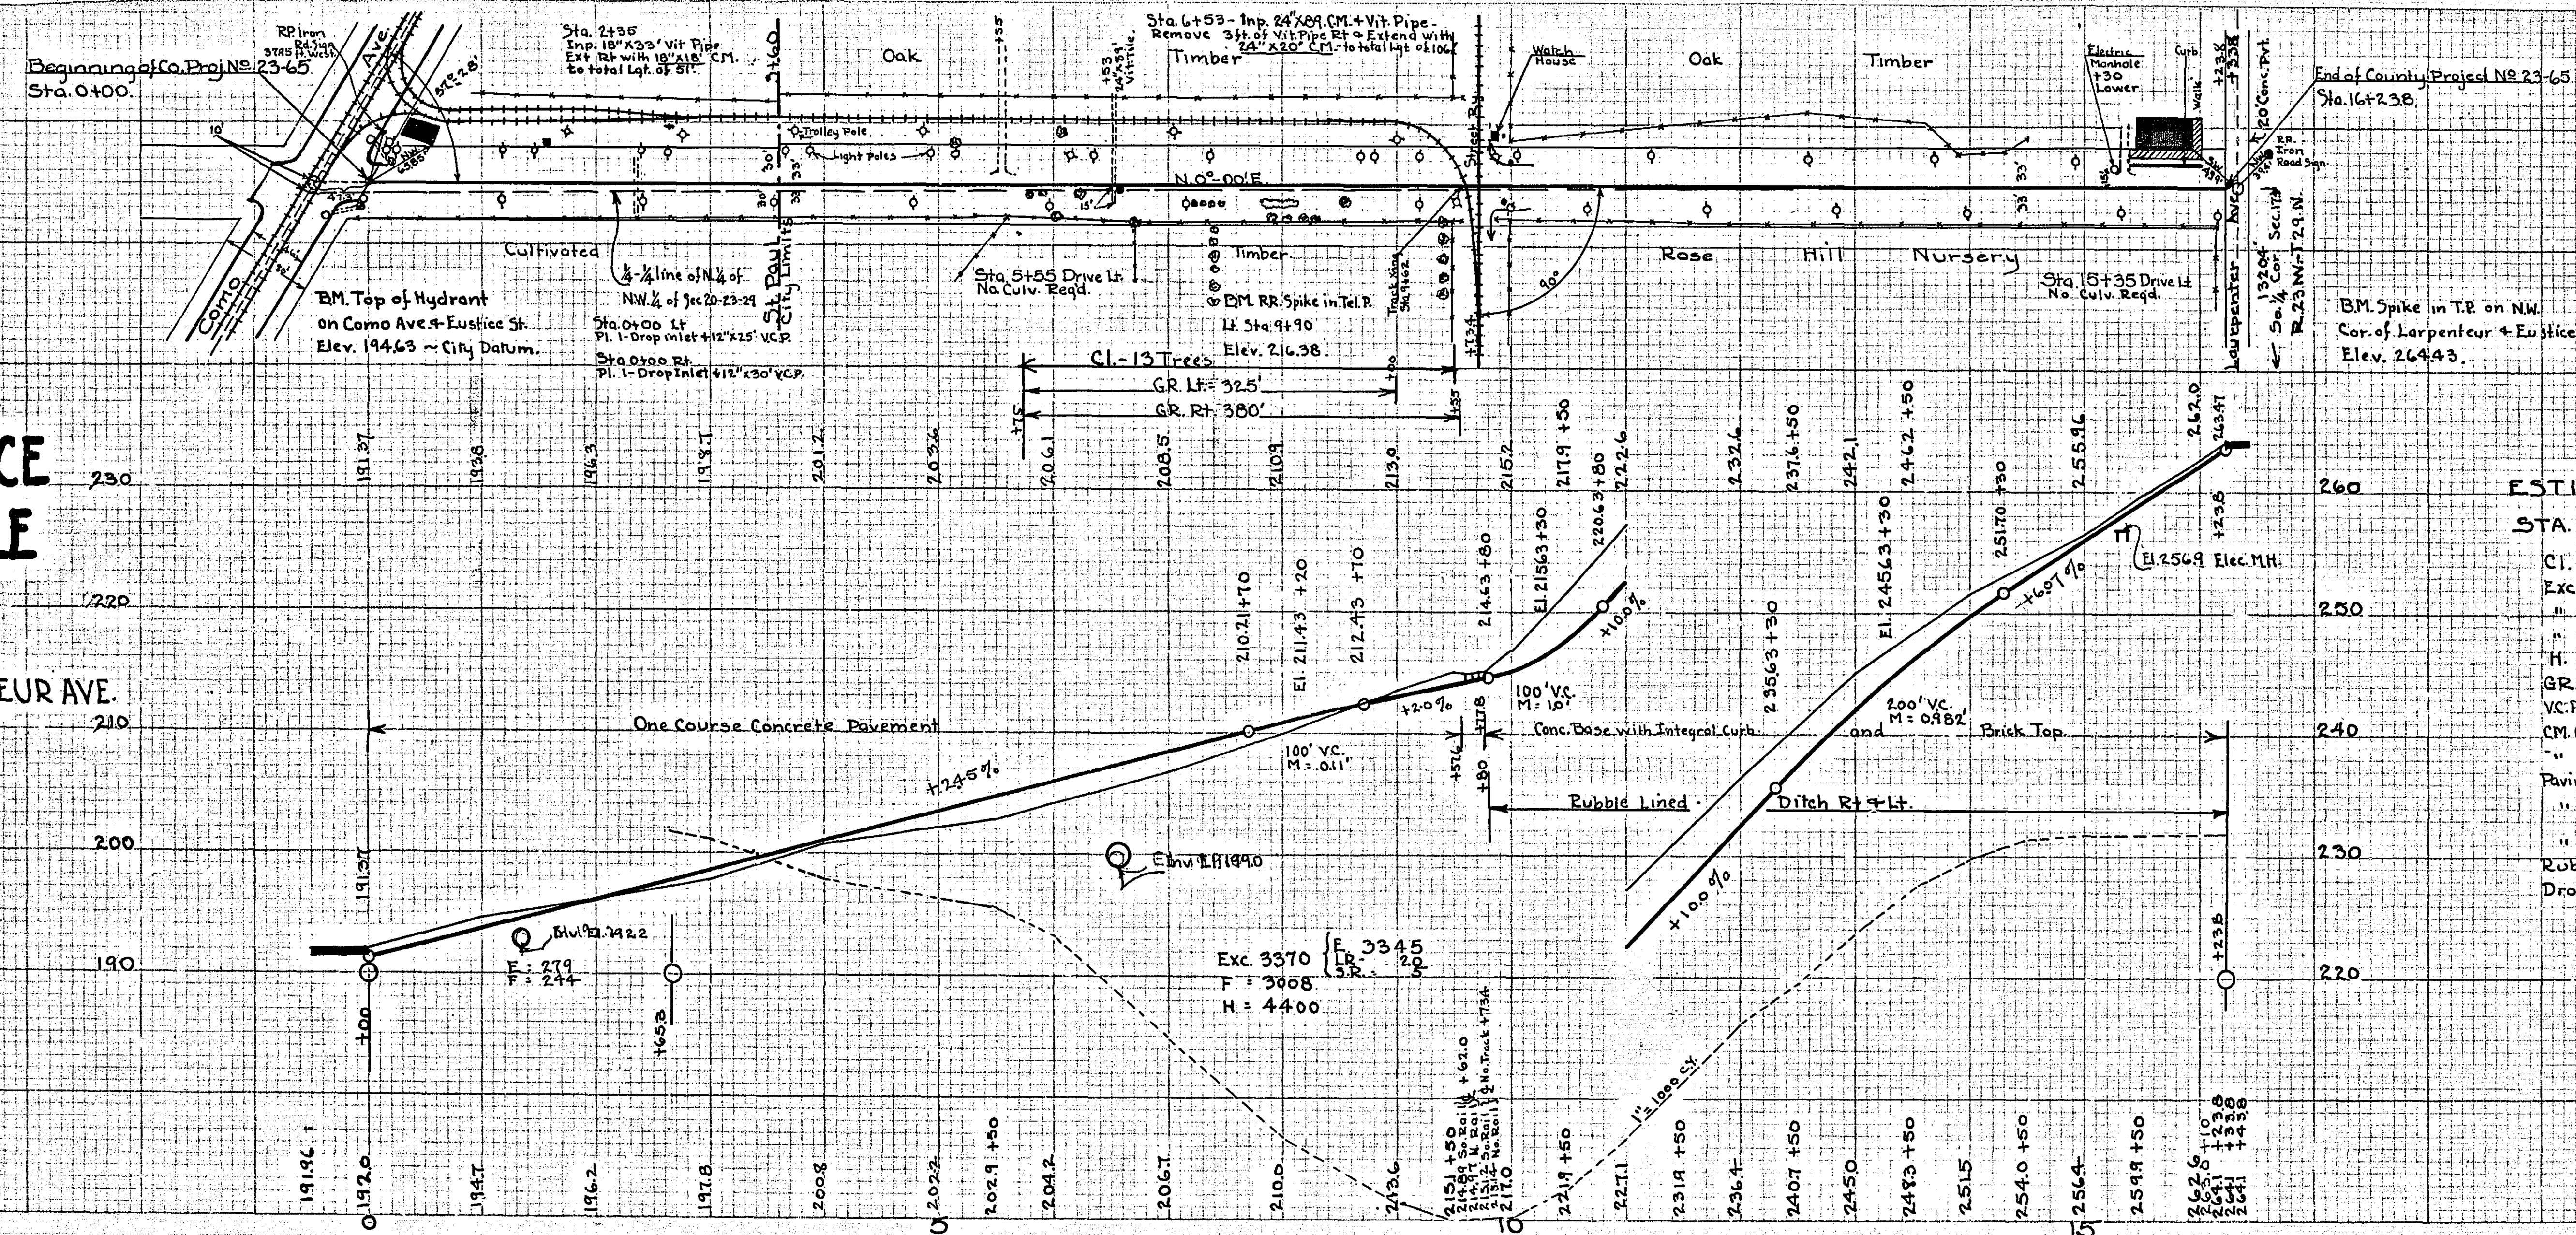

ESTIMATED QUANTITIES

STA. 0+00 TO STA. 16+23.8

CL.	13	Trees
Exc. Earth	3624	C.Y.
" L.R.	20	"
" D.R.	5	"
H.	4400	Sta.Yds.
GR.	705	Lin.Ft.
VC Pipe. 12"	35	" "
CM. Culv. 24"	20	" "
" " 18"	18	" "
Paving-One Course Concrete	2620.3	Sq.Yds.
" Conc Base with Integral Curb	1752.6	" "
" Brick Top.	1679.3	" "
Rubble Ditch Lining	103.6	" "
Drop Inlets	2	"

**MICROFILMED
RAMSEY CO. ENGR.**