


RAMSEY CO. ENGR. OFFICE
CONSTRUCTION PROFILE
RICE CREEK BRIDGE
RICE CREEK ON ROAD NO 12
PROJ. 26-04

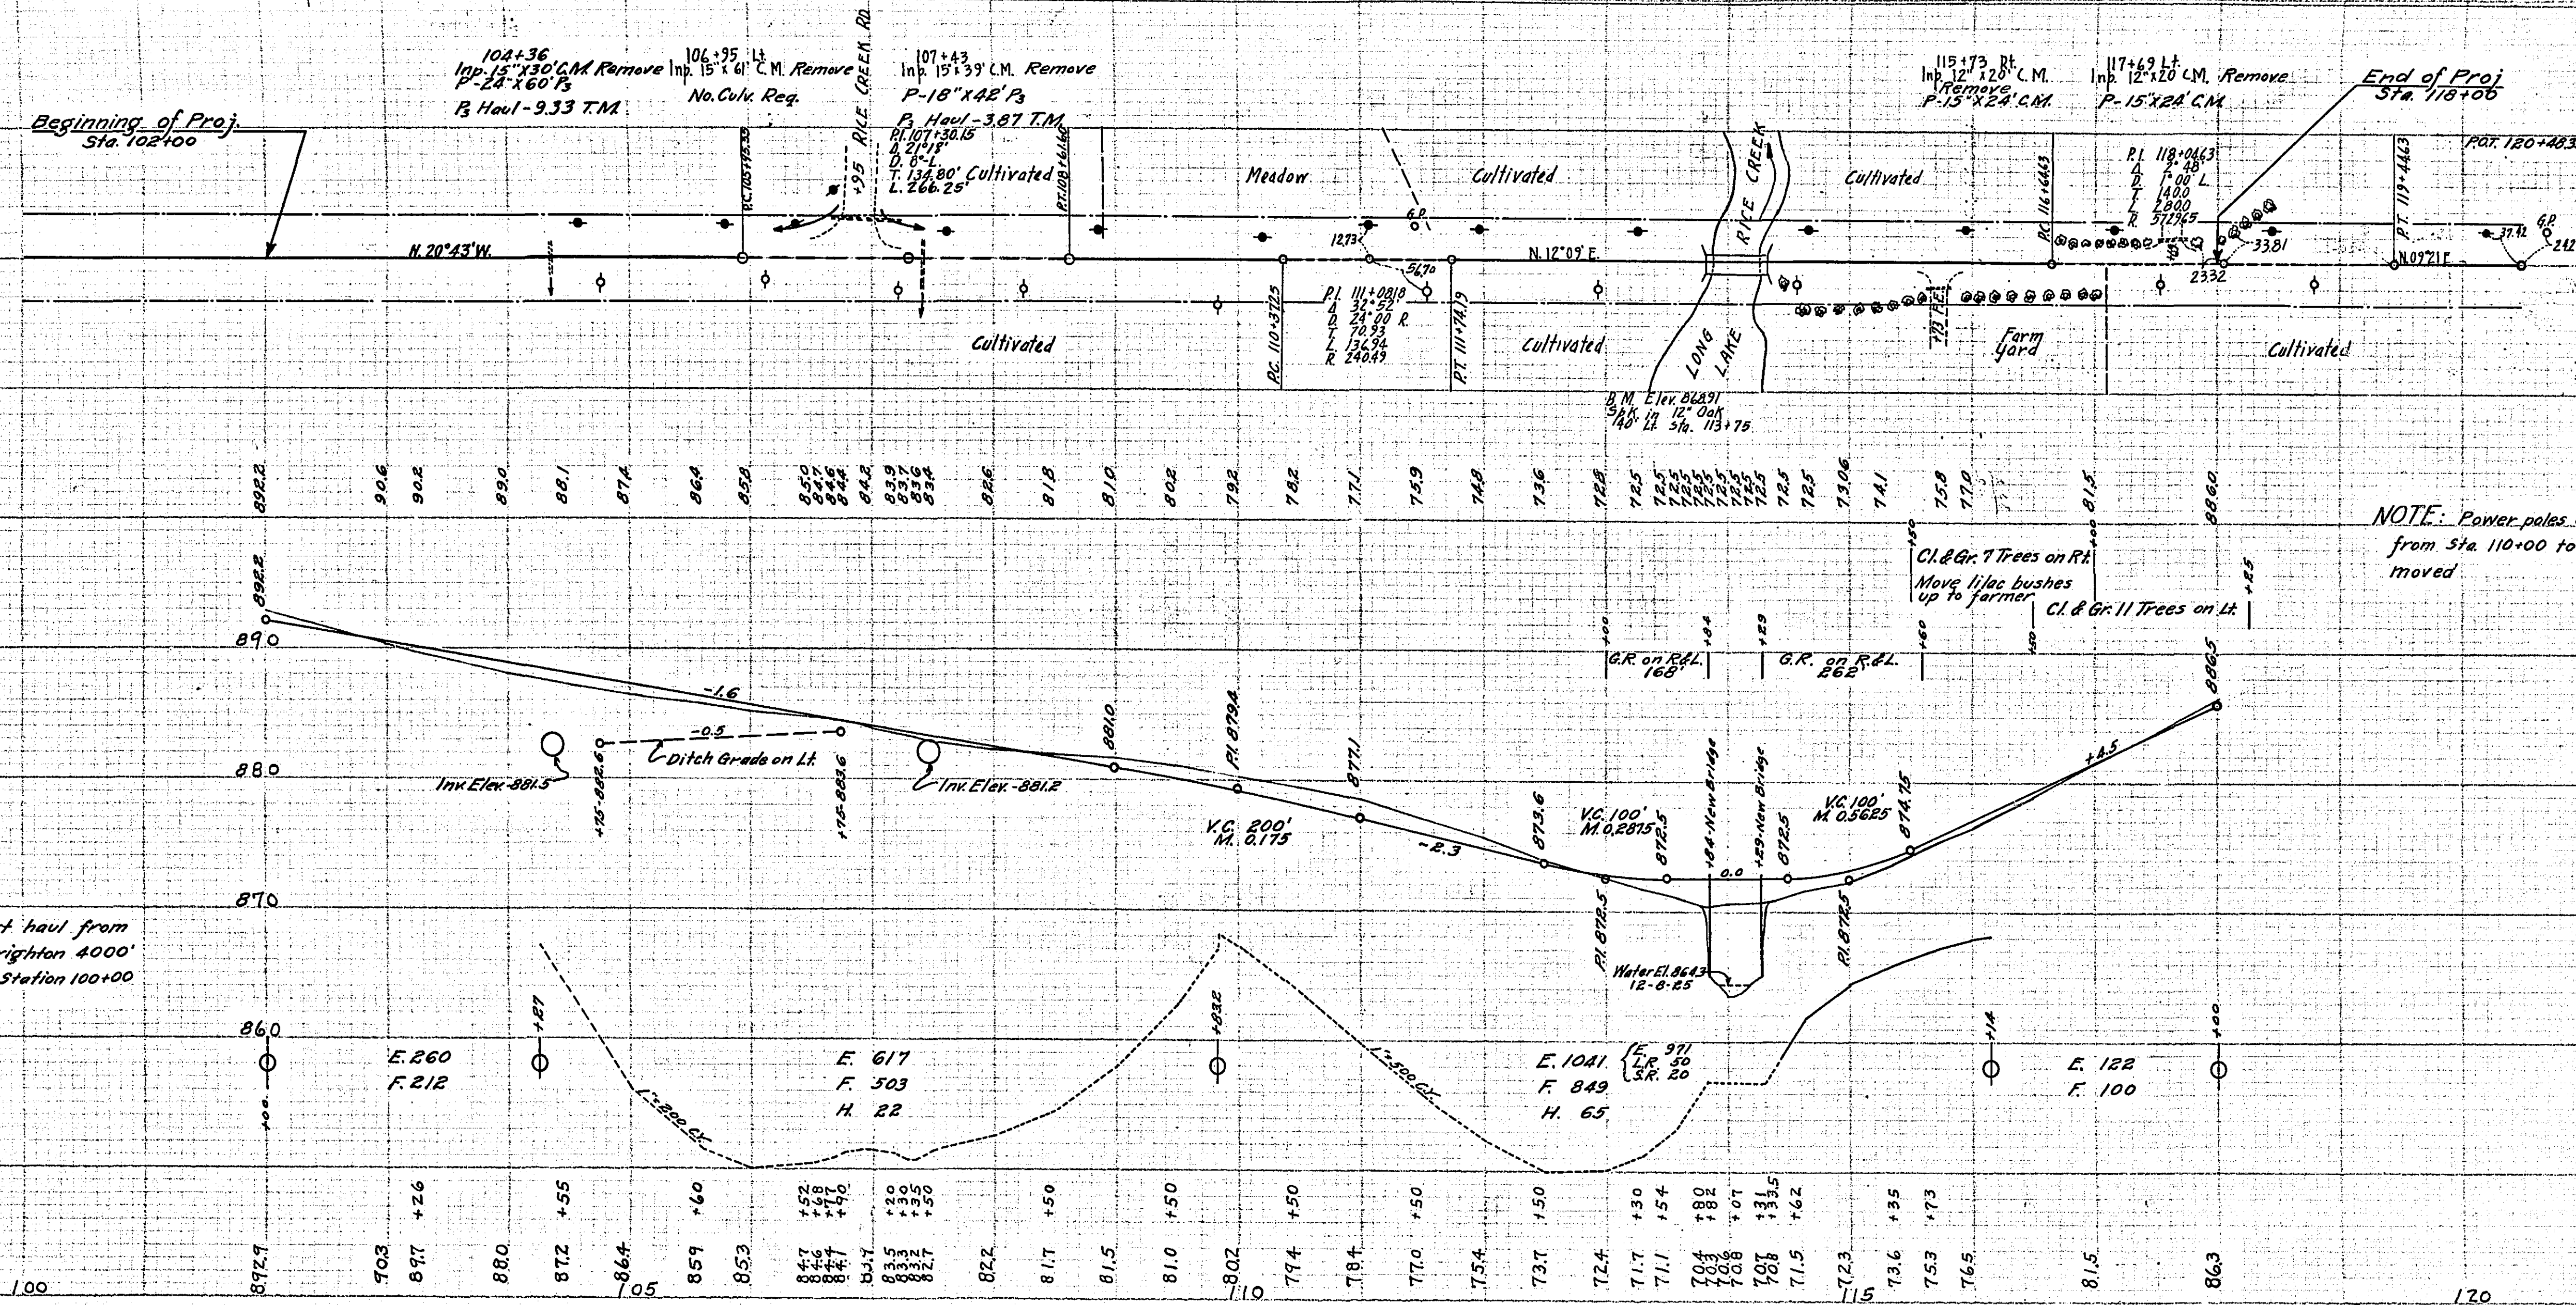

NOTE: Power poles on the Rt. from Sta. 110+00 to end to be moved

ESTIMATED QUANTITIES		
Sta. 102+00 to Sta. 118+00		
Clearing	Trees	18
Grubbing	Trees	18
Excavation - earth	C.Y.	1370
" - loose rock	C.Y.	50
" - solid rock	C.Y.	20
" - overhaul	C.Y.	87
Install - Culv. 15" C.M.	L.F.	48
" - 18" P.	L.F.	42
" - 24" P.	L.F.	60
P. Culv. Haul	T.M.	13.20
Remove old culv.	L.F.	170
Guard Rail - Cable	L.F.	430
Bridge - 45' Deck Girder - Complete		1
Guard Rail Anchor Blocks - Complete		8

MICROFILMED
RAMSEY CO. ENGR.

MICROFILMED
RAMSEY CO. ENGR.

26-04