


RAMSEY CO. ENGR. OFFICE.
 CONSTRUCTION PROFILE
 EAST COUNTY LINE
 FROM HIGHWOOD AVE. TO CARVER'S LAKE.
 PROJ. 26-06.

MICROFILMED
RAMSEY CO. ENGR.

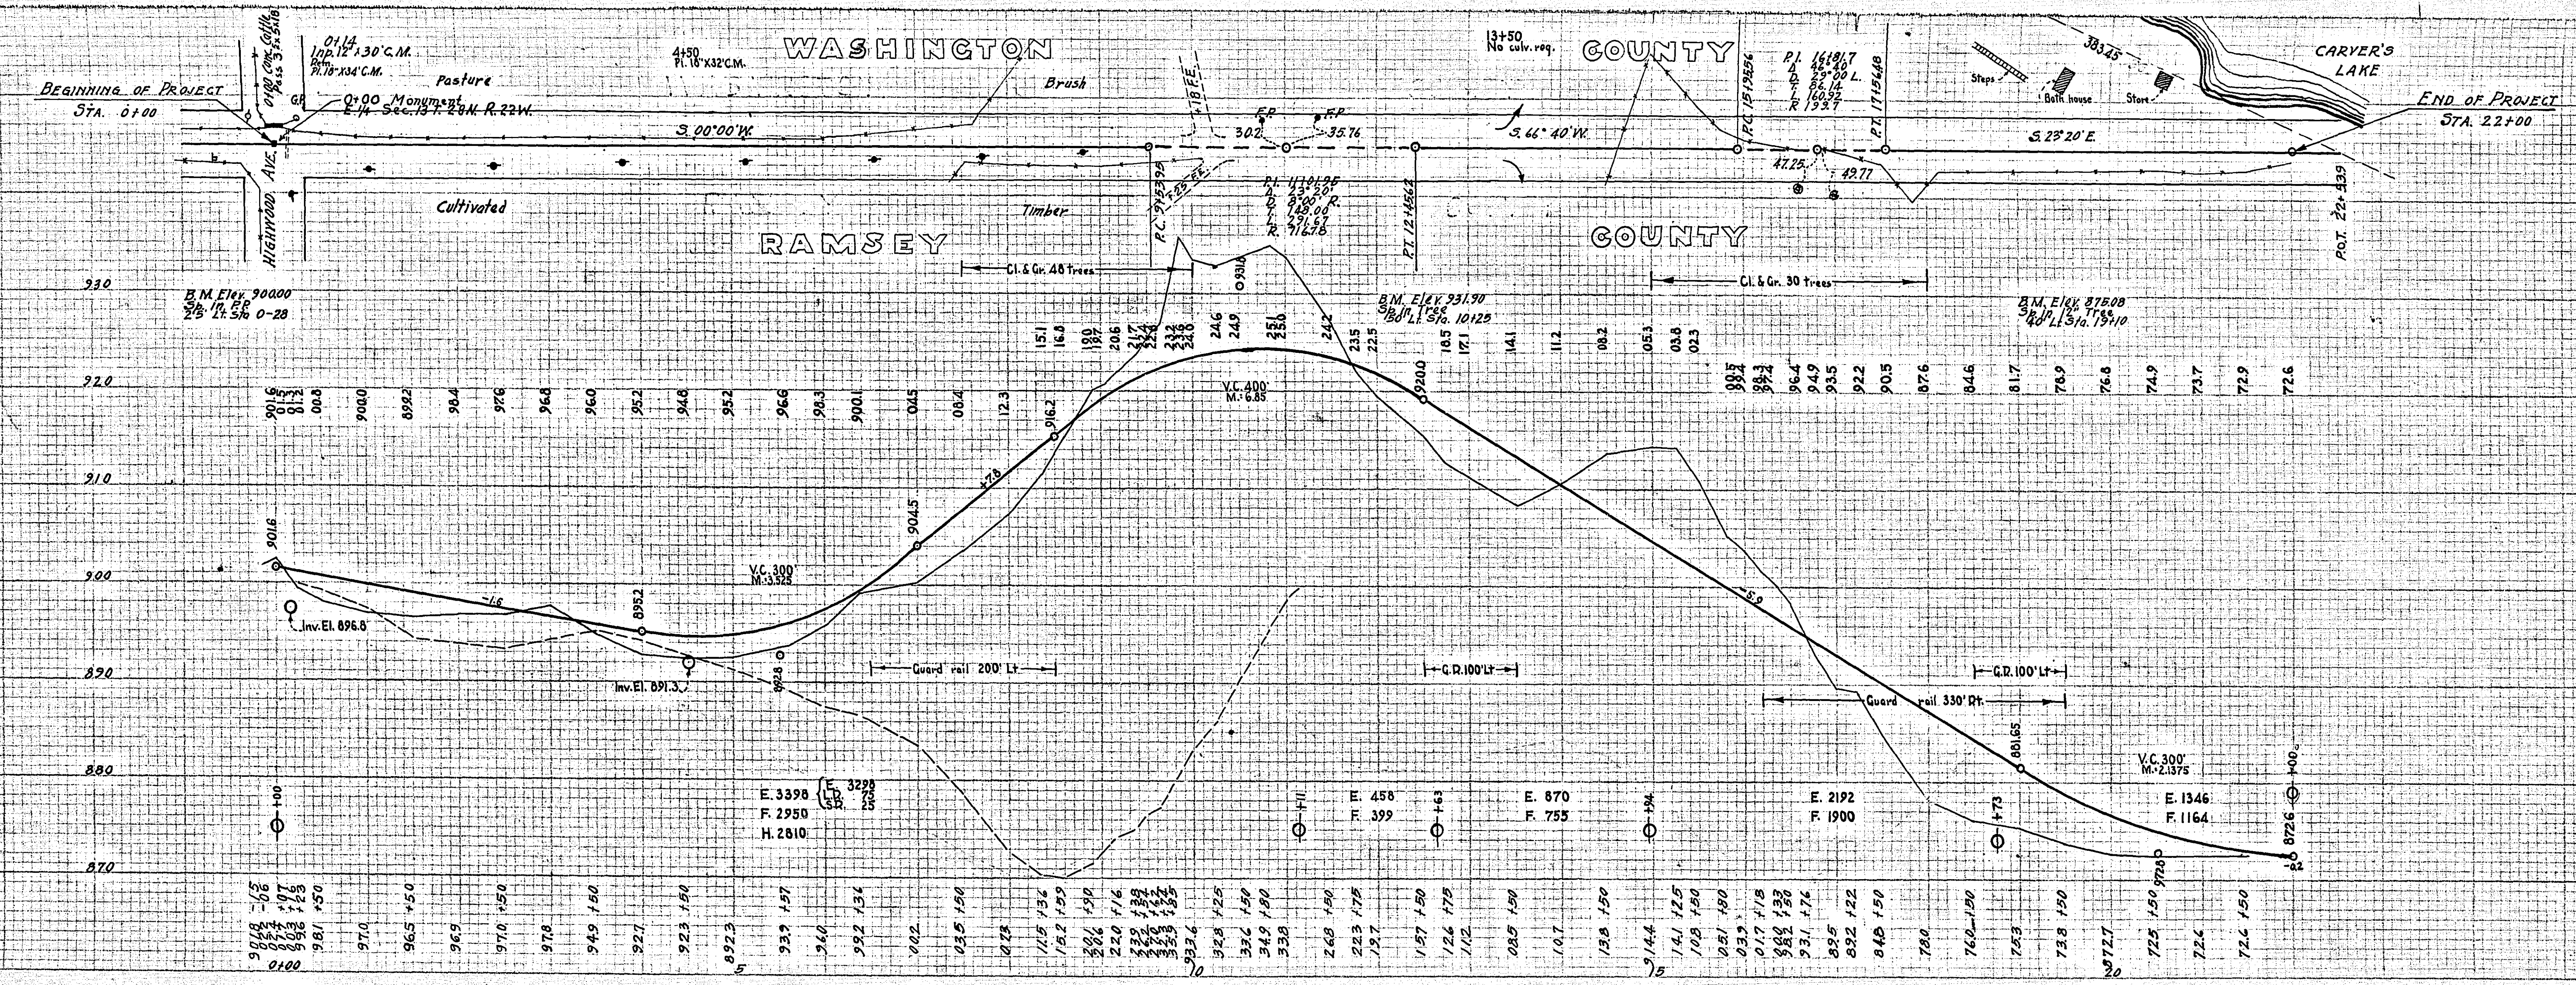

ESTIMATED QUANTITIES
Sta. 0+00 to Sta. 22+00.

Clearing	Trees	78
Grubbing	Trees	78
Exc. Earth	Cu. Yds.	8164
" L.R.	"	75
" S.D.	"	25
" O.H.	"	2810
Install C.M. 18"	Lin. Ft.	66
Remove old culv.	"	30
Guard rail (Cable)	"	730
Guard rail anchor blocks. Each	"	8

MICROFILMED
RAMSEY CO. ENGR.