


H:\Land Projects\3105-051.dwg User: rd C Title: dng

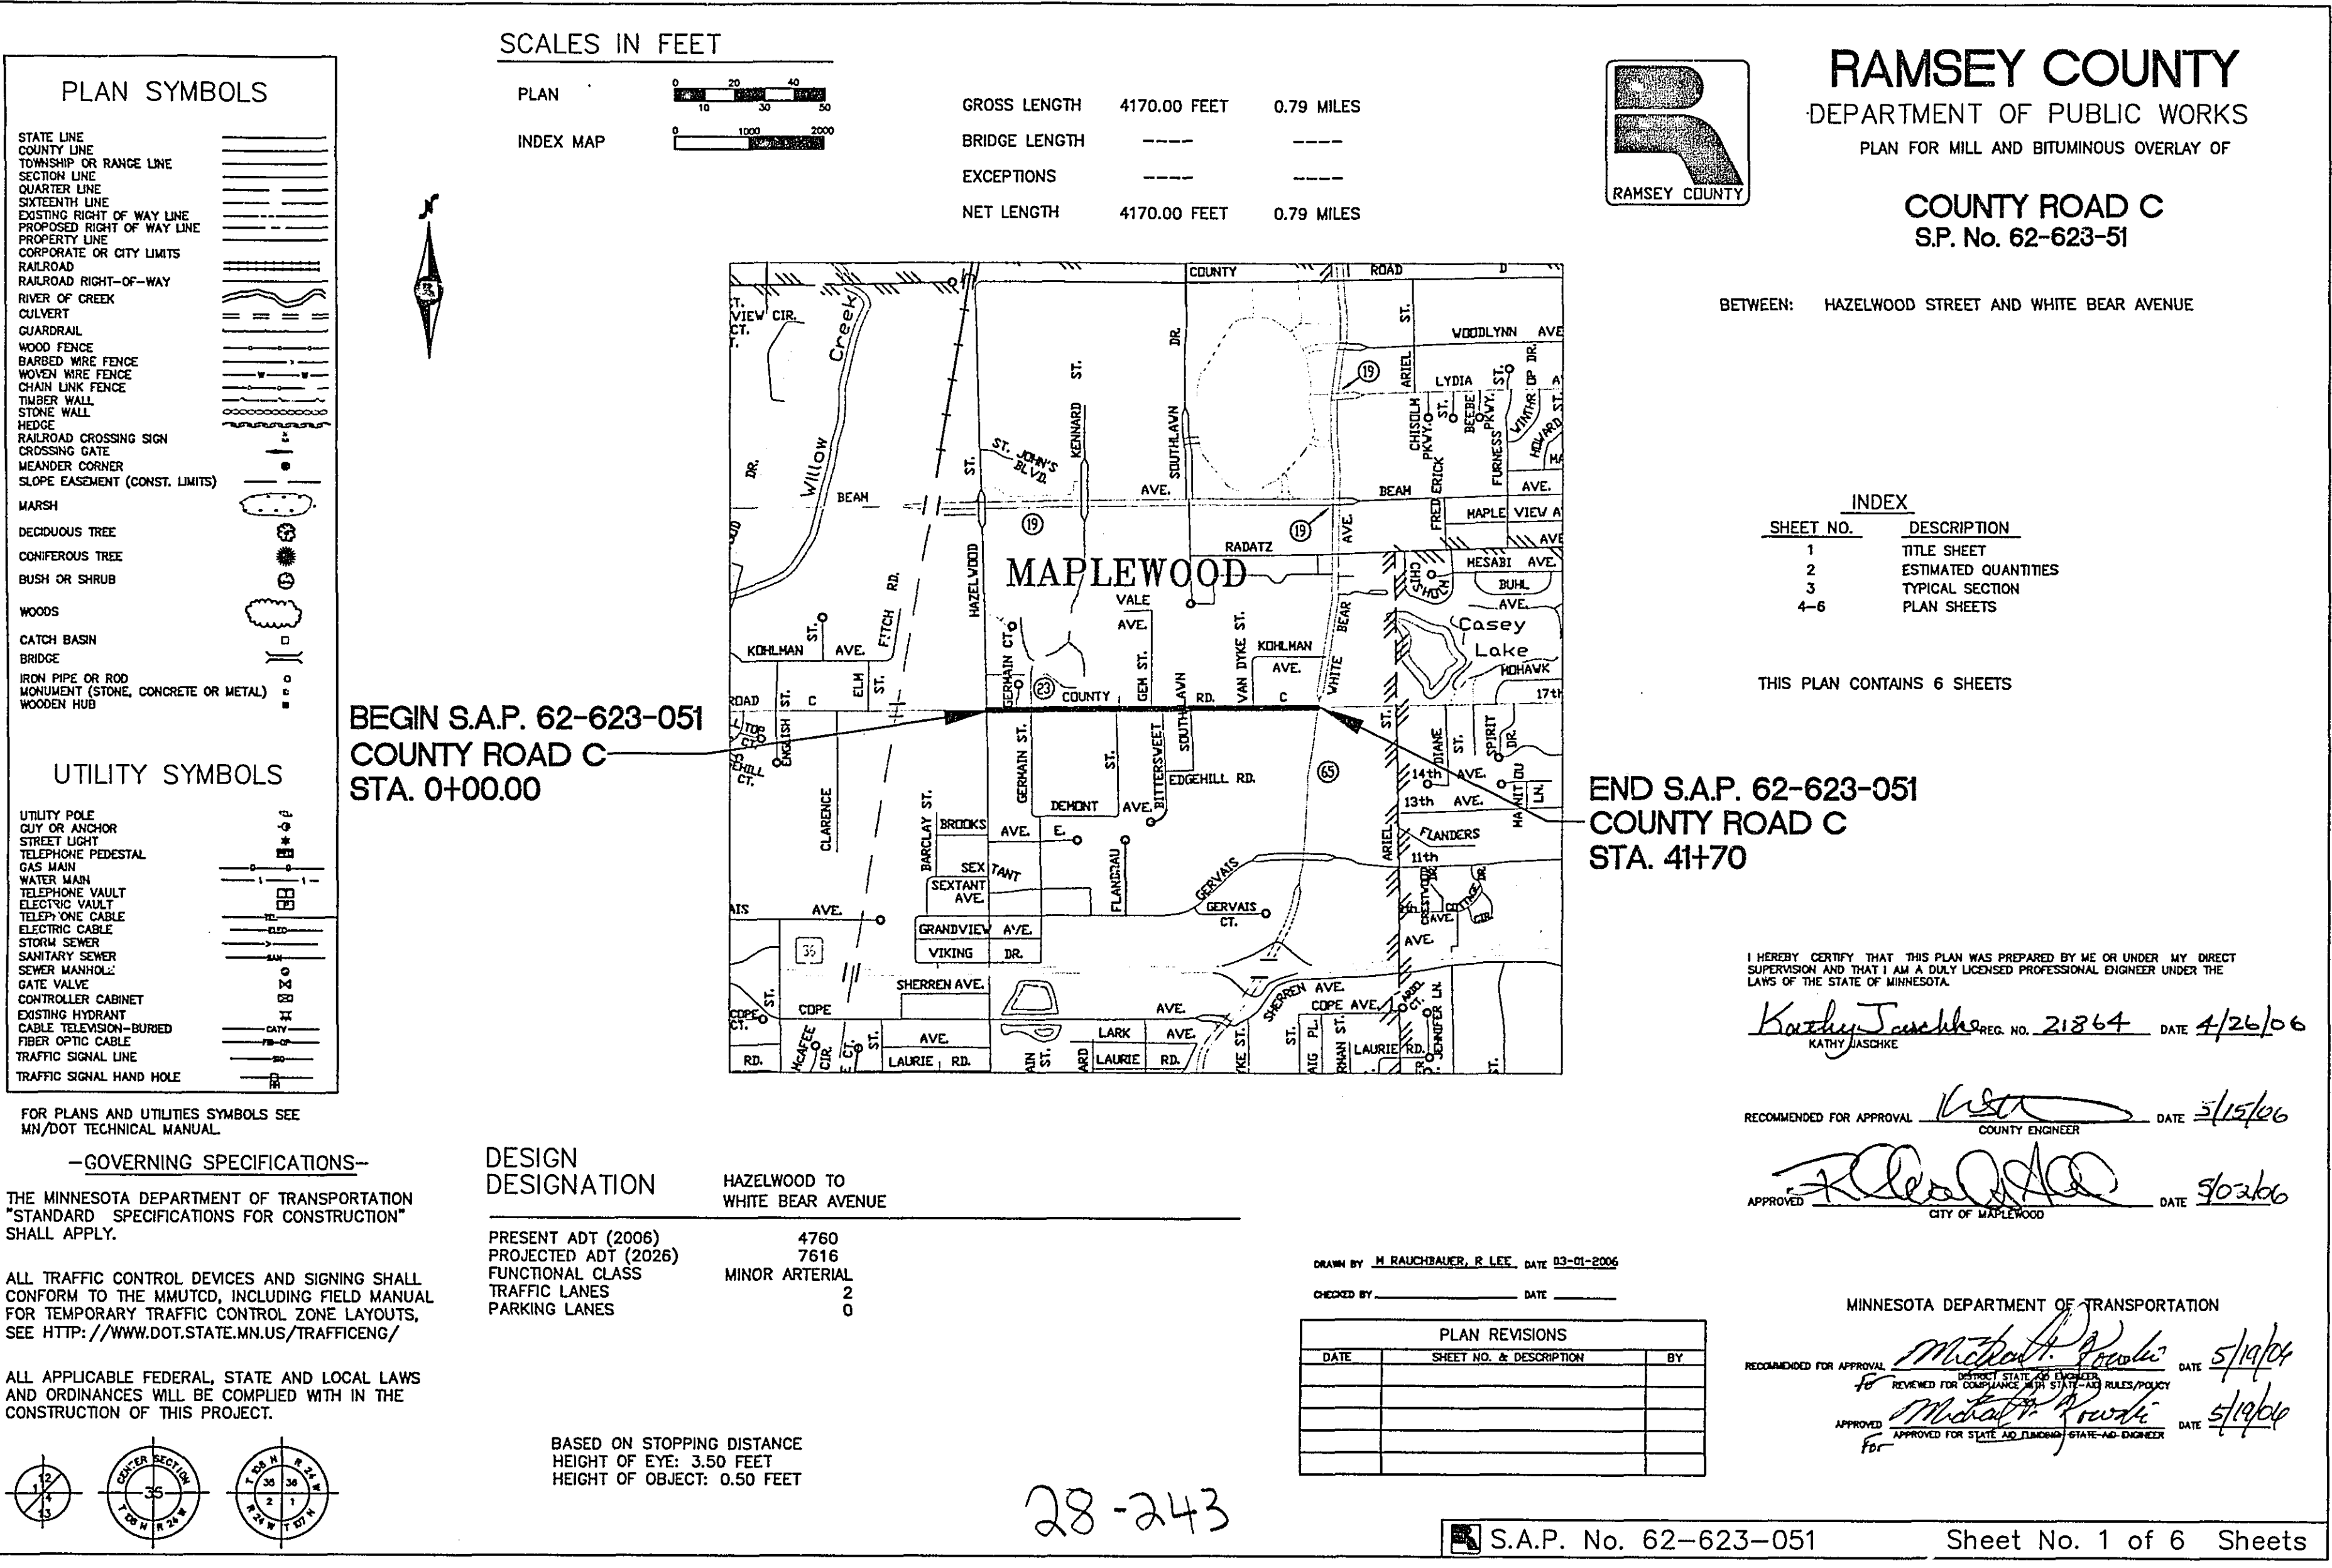

Design on Ispw1(H):Land Projects 3/05-OLAY/dwg/CO RD C ESTIMATED QUANTITIES

STATEMENT OF ESTIMATED QUANTITIES			
Item Number	Item	Unit	Estimated Quantity 100% S.A.P. 62-623-61
2021.501	Mobilization	L.S.	1
2232.501	Mill Bituminous Surface (1 1/2")	S.Y.	15,617
2350.501	Type MVWE35035B (1 1/2") Wearing Course Mixture	Ton	1,509
2357.502	Bituminous Material for Tack Coat	Gal.	780
2504.602	Adjust Valve Box	Each	4
2506.522	Adjust Frame & Ring Casting	Each	20
2506.602	Construct Survey Control Structure	Each	2
2563.601	Traffic Control	L.S.	1
2564.602	Pavement Message (Left or Right Arrow) Epoxy	Each	1
2564.603	12" Solid Line White (Survey Marker) - Epoxy	L.F.	68
2564.618	Zebra Crosswalk White - Epoxy	S.F.	150
2565.603	NMC Loop Detector (6' X 6')	L.F.	382

MN/DOT STANDARD PLATES	
PLATE NO.	DESCRIPTION
8000I	STANDARD BARRICADES

BASIS FOR ESTIMATED QUANTITIES

- 115 LBS. / SQUARE YARDS / INCH OF BITUMINOUS
- .05 GALLONS OF BITUMINOUS TACK COAT / SQUARE YARD OF PAVEMENT / LIFTS

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY
DIRECT SUPERVISION, AND THAT I AM A DULY LICENSED PROFESSIONAL
ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA

NAME Kathy Jaschke
MN REG. NO. 21864 DATE 4/26/06

28-243
COUNTY ROAD C
ESTIMATED QUANTITIES
S.A.P. 62-623-51 SHEET 2 of 6 SHEETS

