

STATEMENT OF ESTIMATED QUANTITIES				
Charts	Notes	Item Number	Item	Estimated Quantity 100% S.A.P. 62-688-03
		2021.501	Mobilization	L.S. 1
		2104.501	Remove Concrete Curb and Gutter	L.F. 333
		2104.503	Remove Concrete Sidewalk	S.F. 382
		2104.505	Remove Concrete Pavement	S.Y. 602
	1	2105.525	Topsoll Borrow (LV)	C.Y. 45
		2123.610	Street Sweeper W/ Pickup Broom	Hour 25
	4	2130.501	Water	M Gal 50
	2	2221.501	Aggregate Shoulderding Class 5	Ton 1500
		2231.604	Crack and Seal Concrete Pavement	S.Y. 3016
		2231.604	Rubblize and Seal Concrete Pavement	S.Y. 26,725
		2232.501	Mill Bituminous Surface (1 1/2")	S.Y. 1,720
	3	2350.505	Bituminous Patch Mix Type LV Non Wear	Ton 50
		2357.502	Bituminous Material for Tack Coat	Gal. 4,750
		2360.501	Type SPWEBS40F' Wear Course Mix	Ton 13,570
		2360.502	Type SPNWB540B Nonwear Course Mix (Includes Leveling for Transitions)	Ton 5,029
		2501.573	Reattach and Tie 18" RC Pipe Apron	Each 6
		2501.573	Reattach and Tie 50" Span RC Pipe Apron	Each 1
		2502.602	Edge Drains	Each 42
		2505.602	Reconstruct Drainage Structure Type LP4 (County supplied Top)	Each 2
		2521.501	6" Concrete Sidewalk	S.F. 330
		2531.501	Concrete Curb & Gutter Design B624	L.F. 285
		2531.618	Truncated Domes (Cast Iron)	S.F. 36
		2563.601	Traffic Control	L.S. 1
		2564.602	Sign Base	Each 2
		2565.602	PVC Loop, 6" X 6"	Each 26
		2565.603	20C 144 Loop Cable	L.F. 270
		2573.540	6" Bitrolol (Type 2)	L.F. 150
	1	2575.502	Seed Mixture 250	LB 7
	1	2575.523	Erosion Control Blanket Cat. 3	S.Y. 250
		2582.501	Pavement Message Preformed Thermoplastic (Left or Right Arrow)	Each 7
		2582.502	4" Solid Line White (Epoxy) 20 mil	L.F. 9,750
		2582.502	4" Broken Line White - Epoxy 20 mil	L.F. 2,500
		2582.502	4" Solid Line Yellow (Epoxy) 20 mil	L.F. 9,800
		2582.503	Zebra Crosswalk Preformed Thermoplastic (2.5" X 6.0")	S.F. 245
		2582.503	Zebra Crosswalk - Epoxy (2.5" X 6.0")	S.F. 1,275

MNDOT STANDARD PLATES	
PLATE NO.	DESCRIPTION
3145F	CONCRETE PIPE TIES
7036F	PEDESTRIAN CURB RAMP
8600I	STANDARD BARRICADES

BASIS FOR ESTIMATED QUANTITIES

1. 115 LBS. / SQUARE YARDS / INCH OF BITUMINOUS

2. .05 GALLONS OF BITUMINOUS TACK COAT /SQUARE YARD OF PAVEMENT / LIFTS

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.


NAME Kathy Jaakke





MIN REG. NO. 23804
DATE 6/25/07



28-250

Design on 15pm 10/11 Land Projects 905-DL4704 Highway 88 ESTIMATED QUANTITIES 45




HIGHWAY 88
 ESTIMATED QUANTITIES
 S.A.P. 62-688-03 CTD SHEET 2 of 20 SHEETS

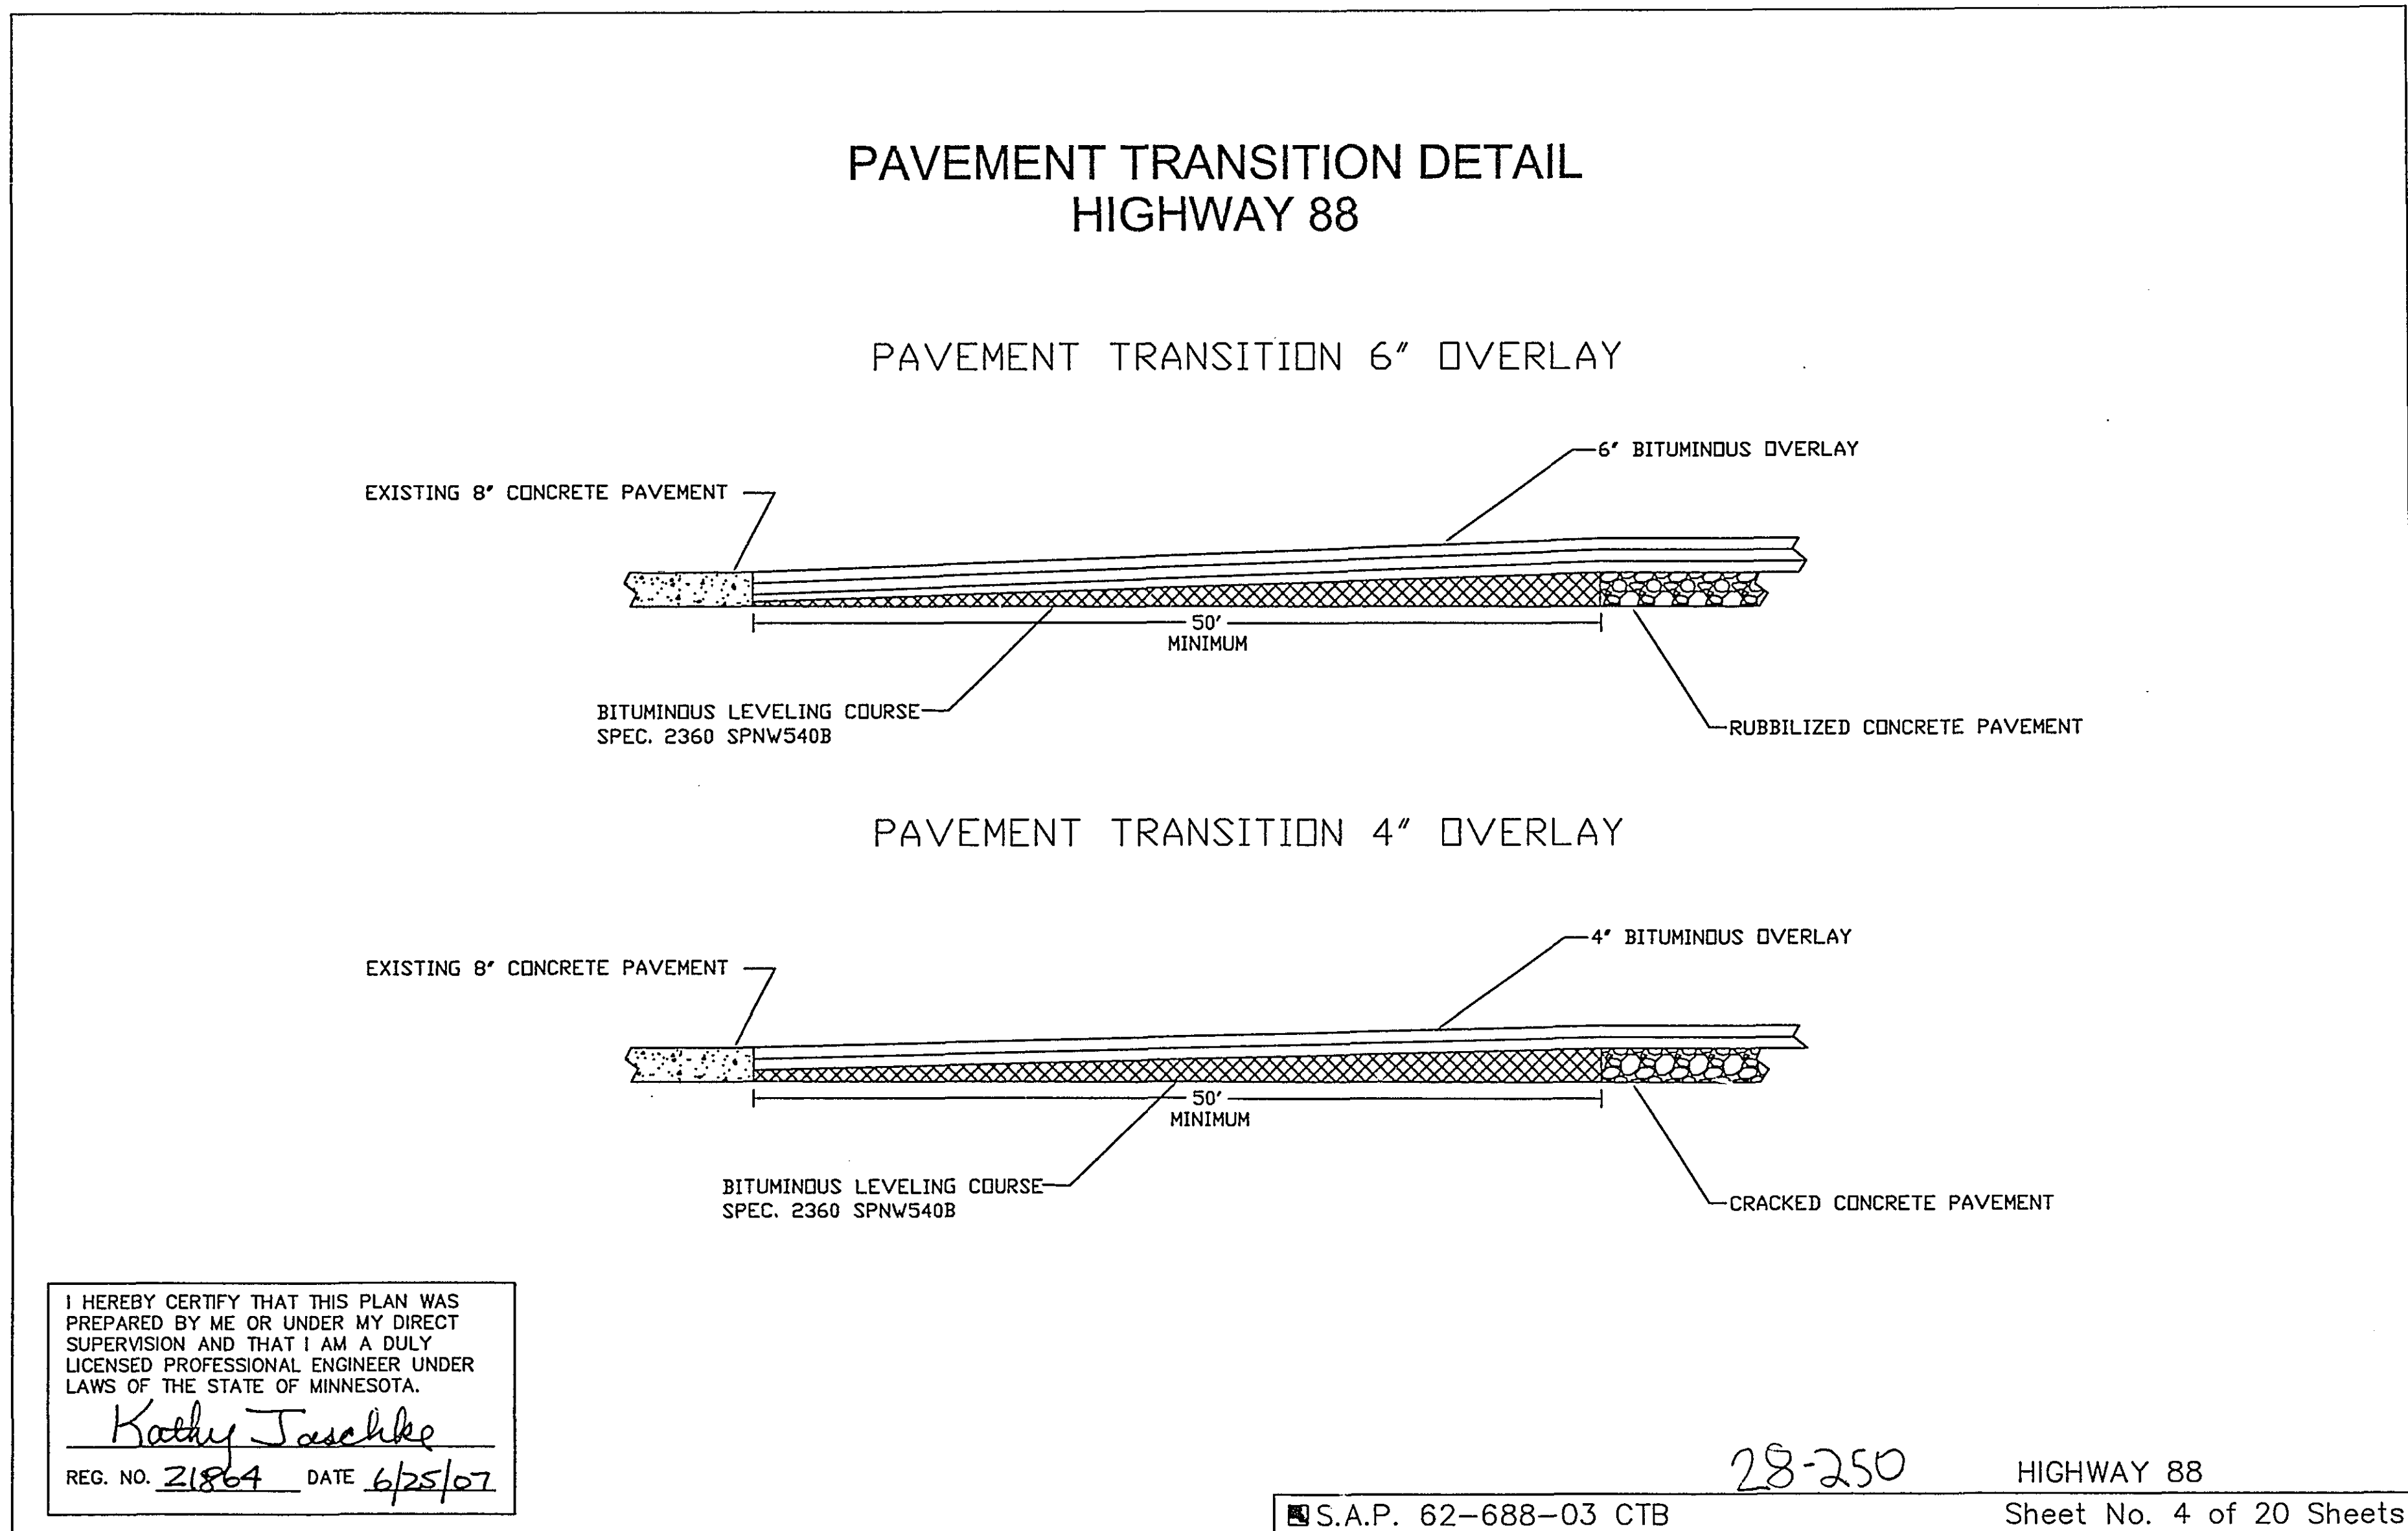

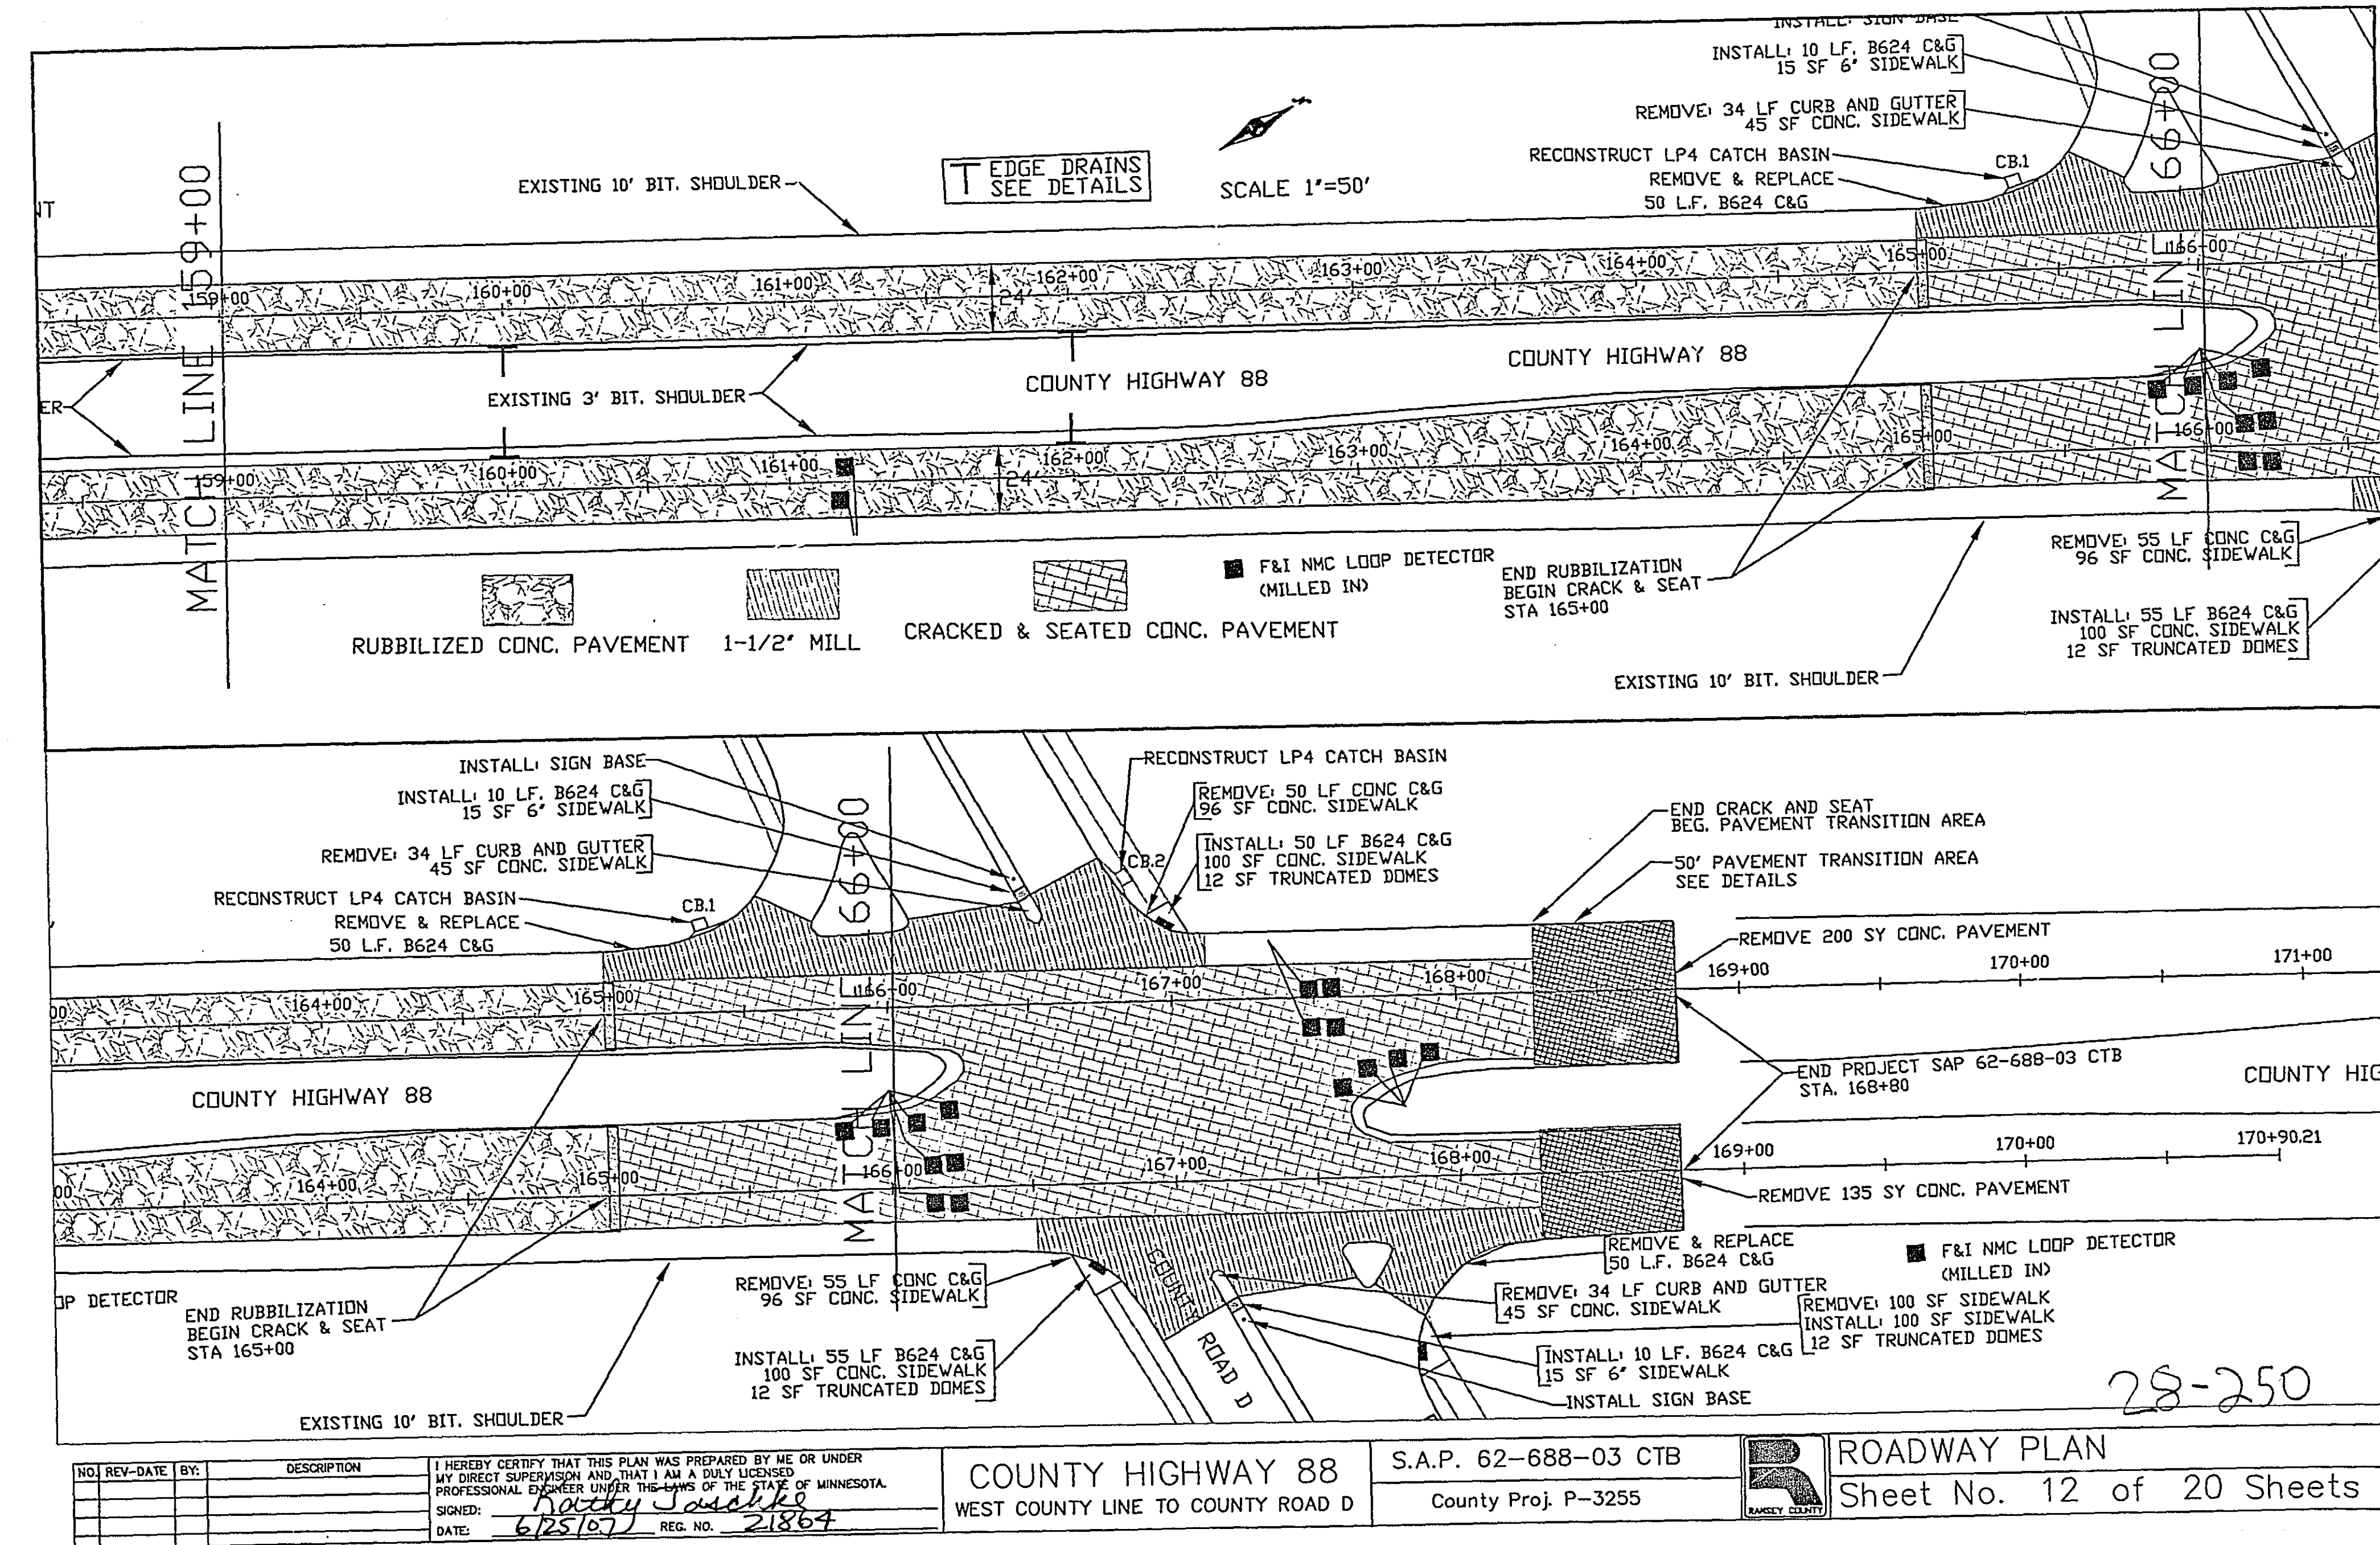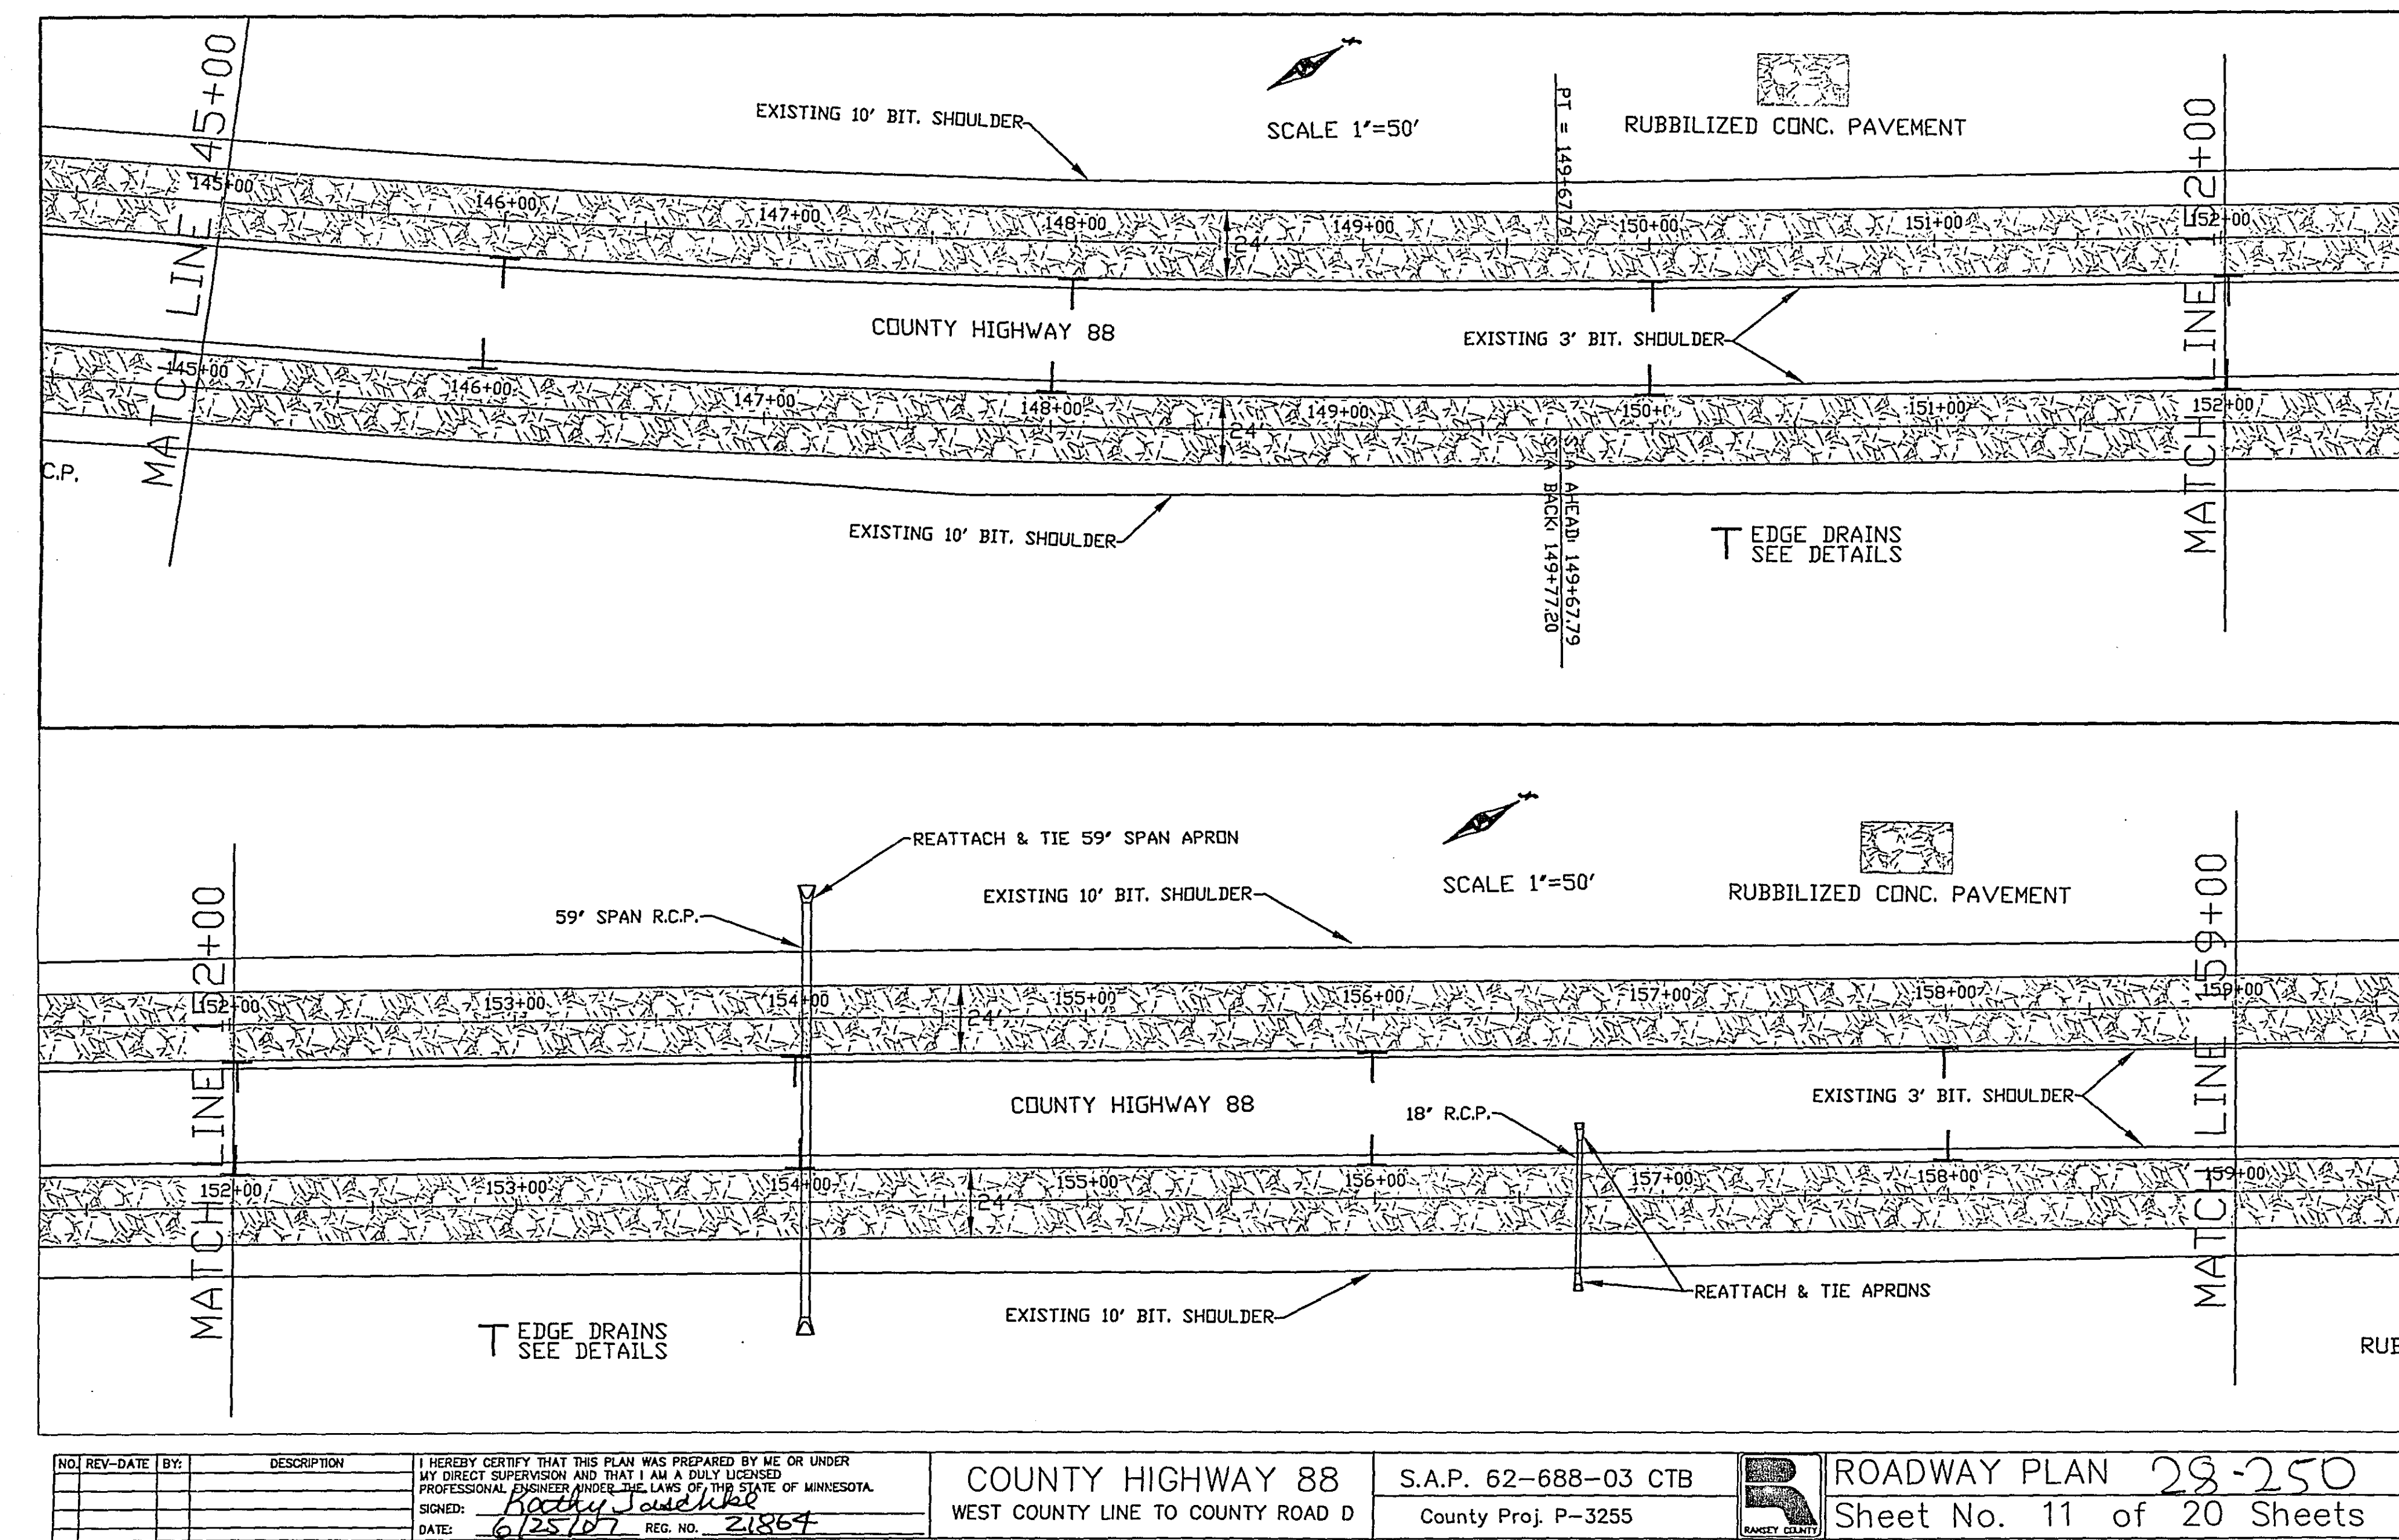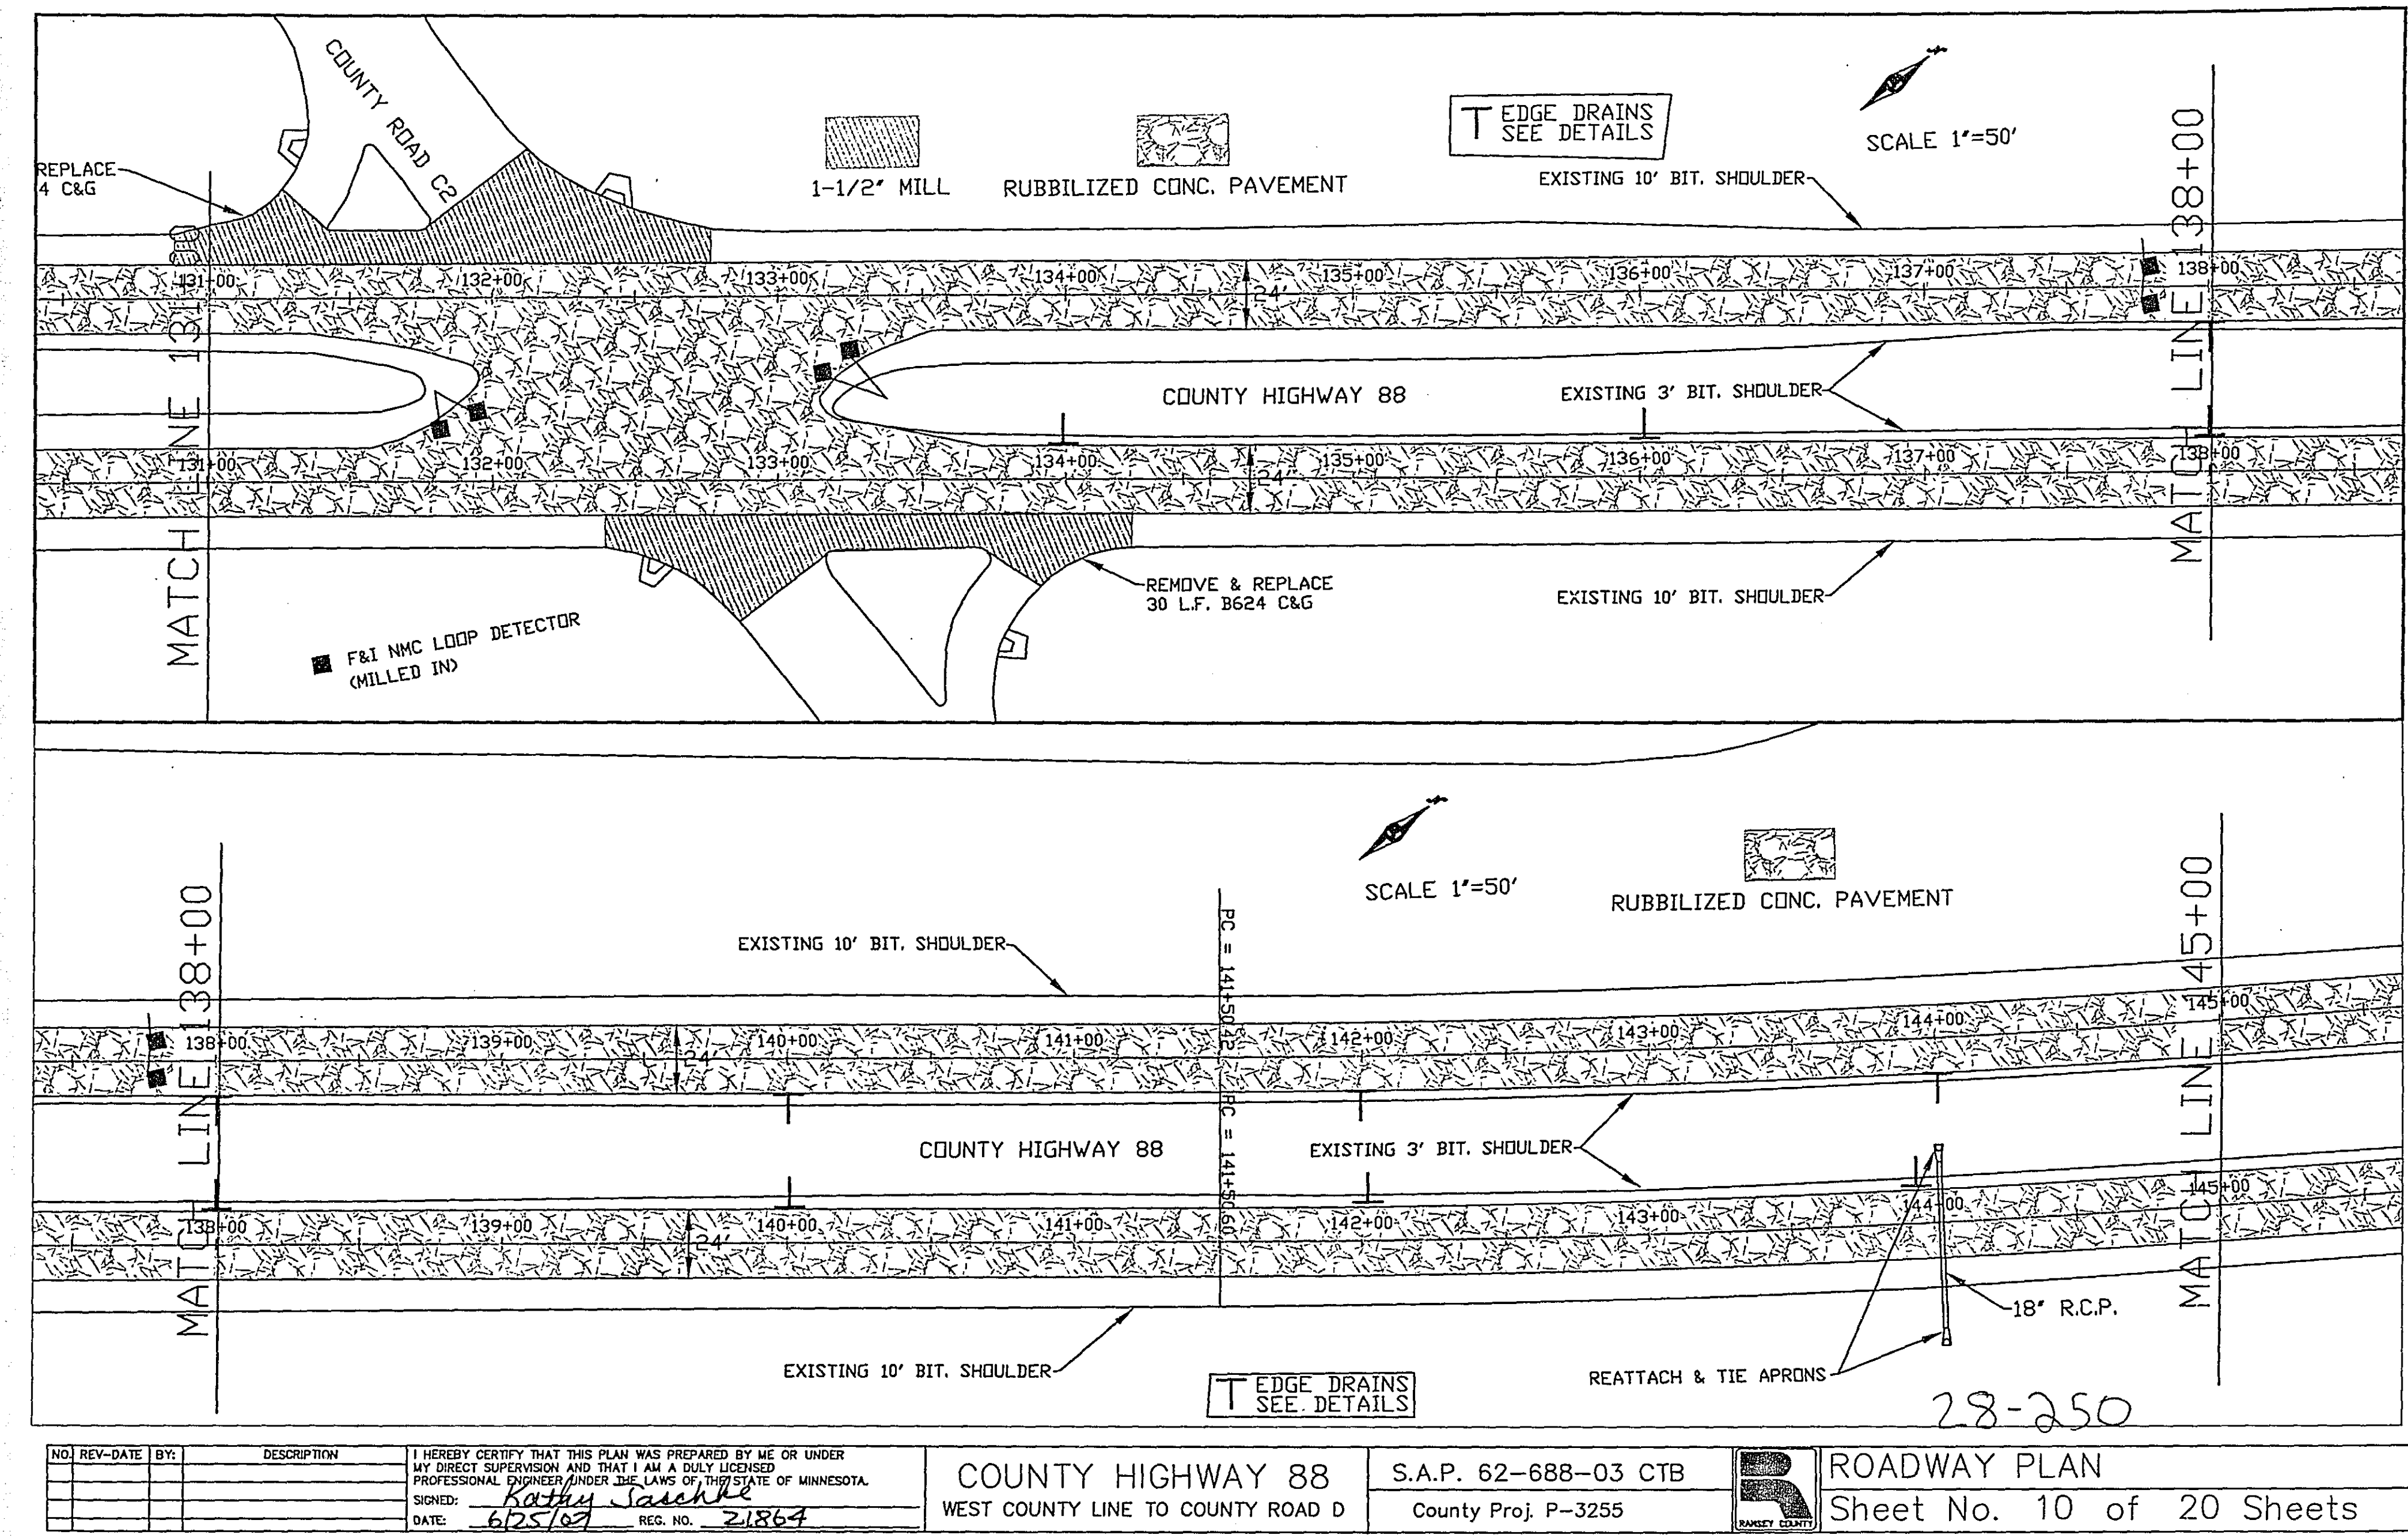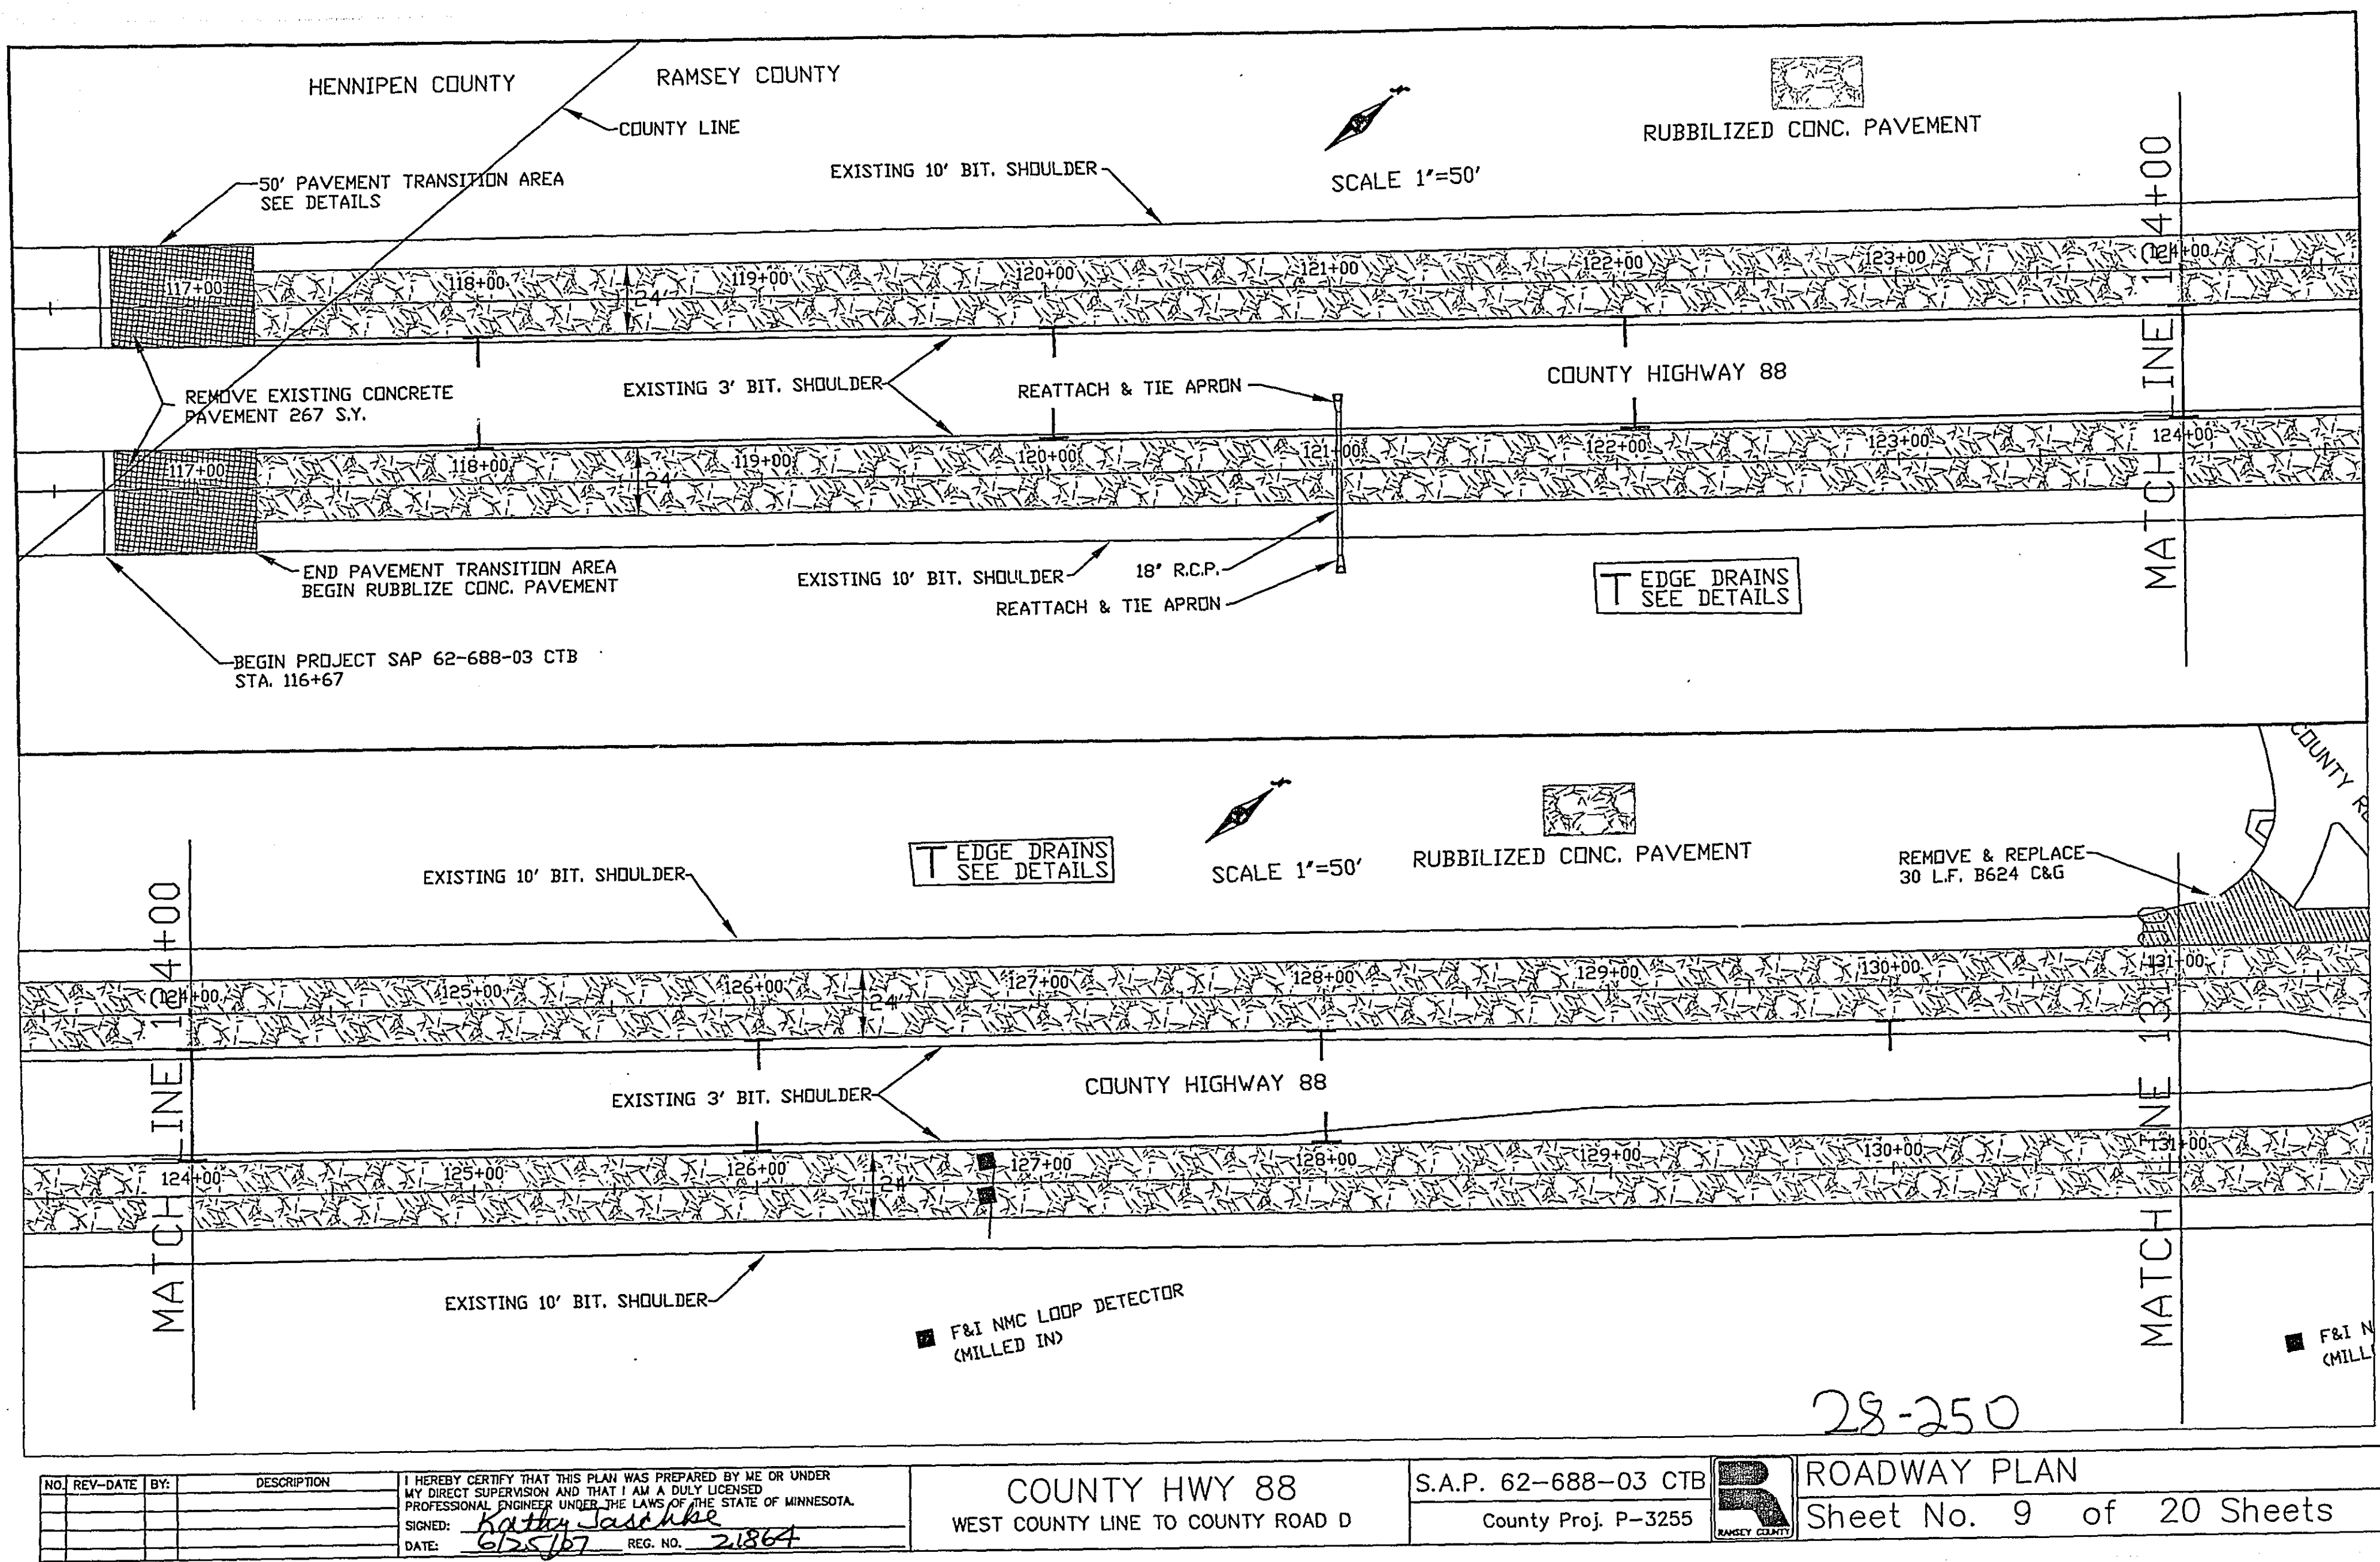

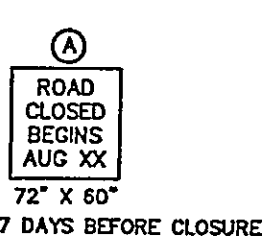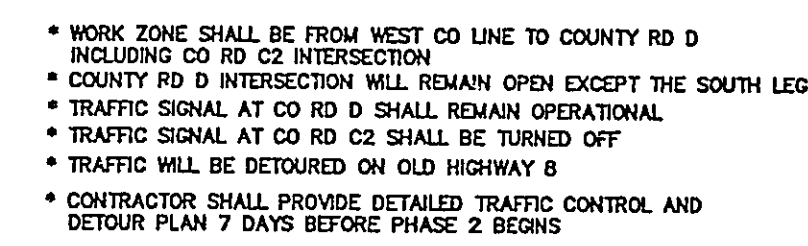

HIGHWAY 88
West Co. Line to Co. Rd D

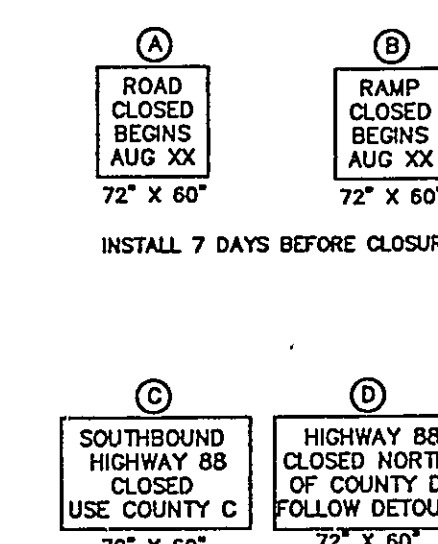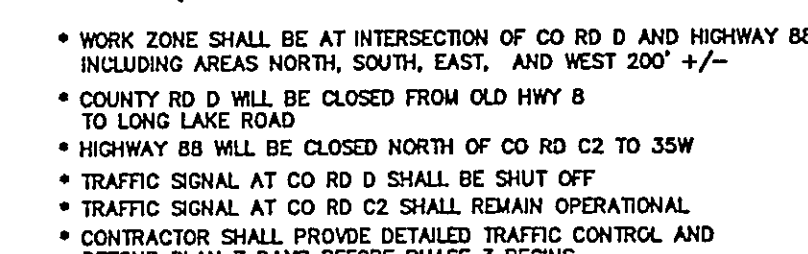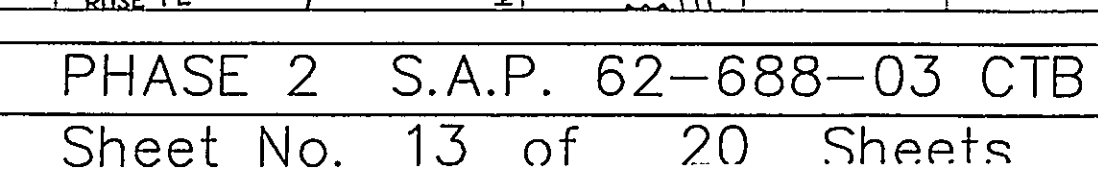

20 250
HIGHWAY 88

