


OFFICE OF COUNTY ENGINEER
RAMSEY CO. MINN.

CONSTRUCTION PROFILE

COUNTY RD. E

PROJ. 29-54

MICROFILMED
RAMSEY CO. ENGR.

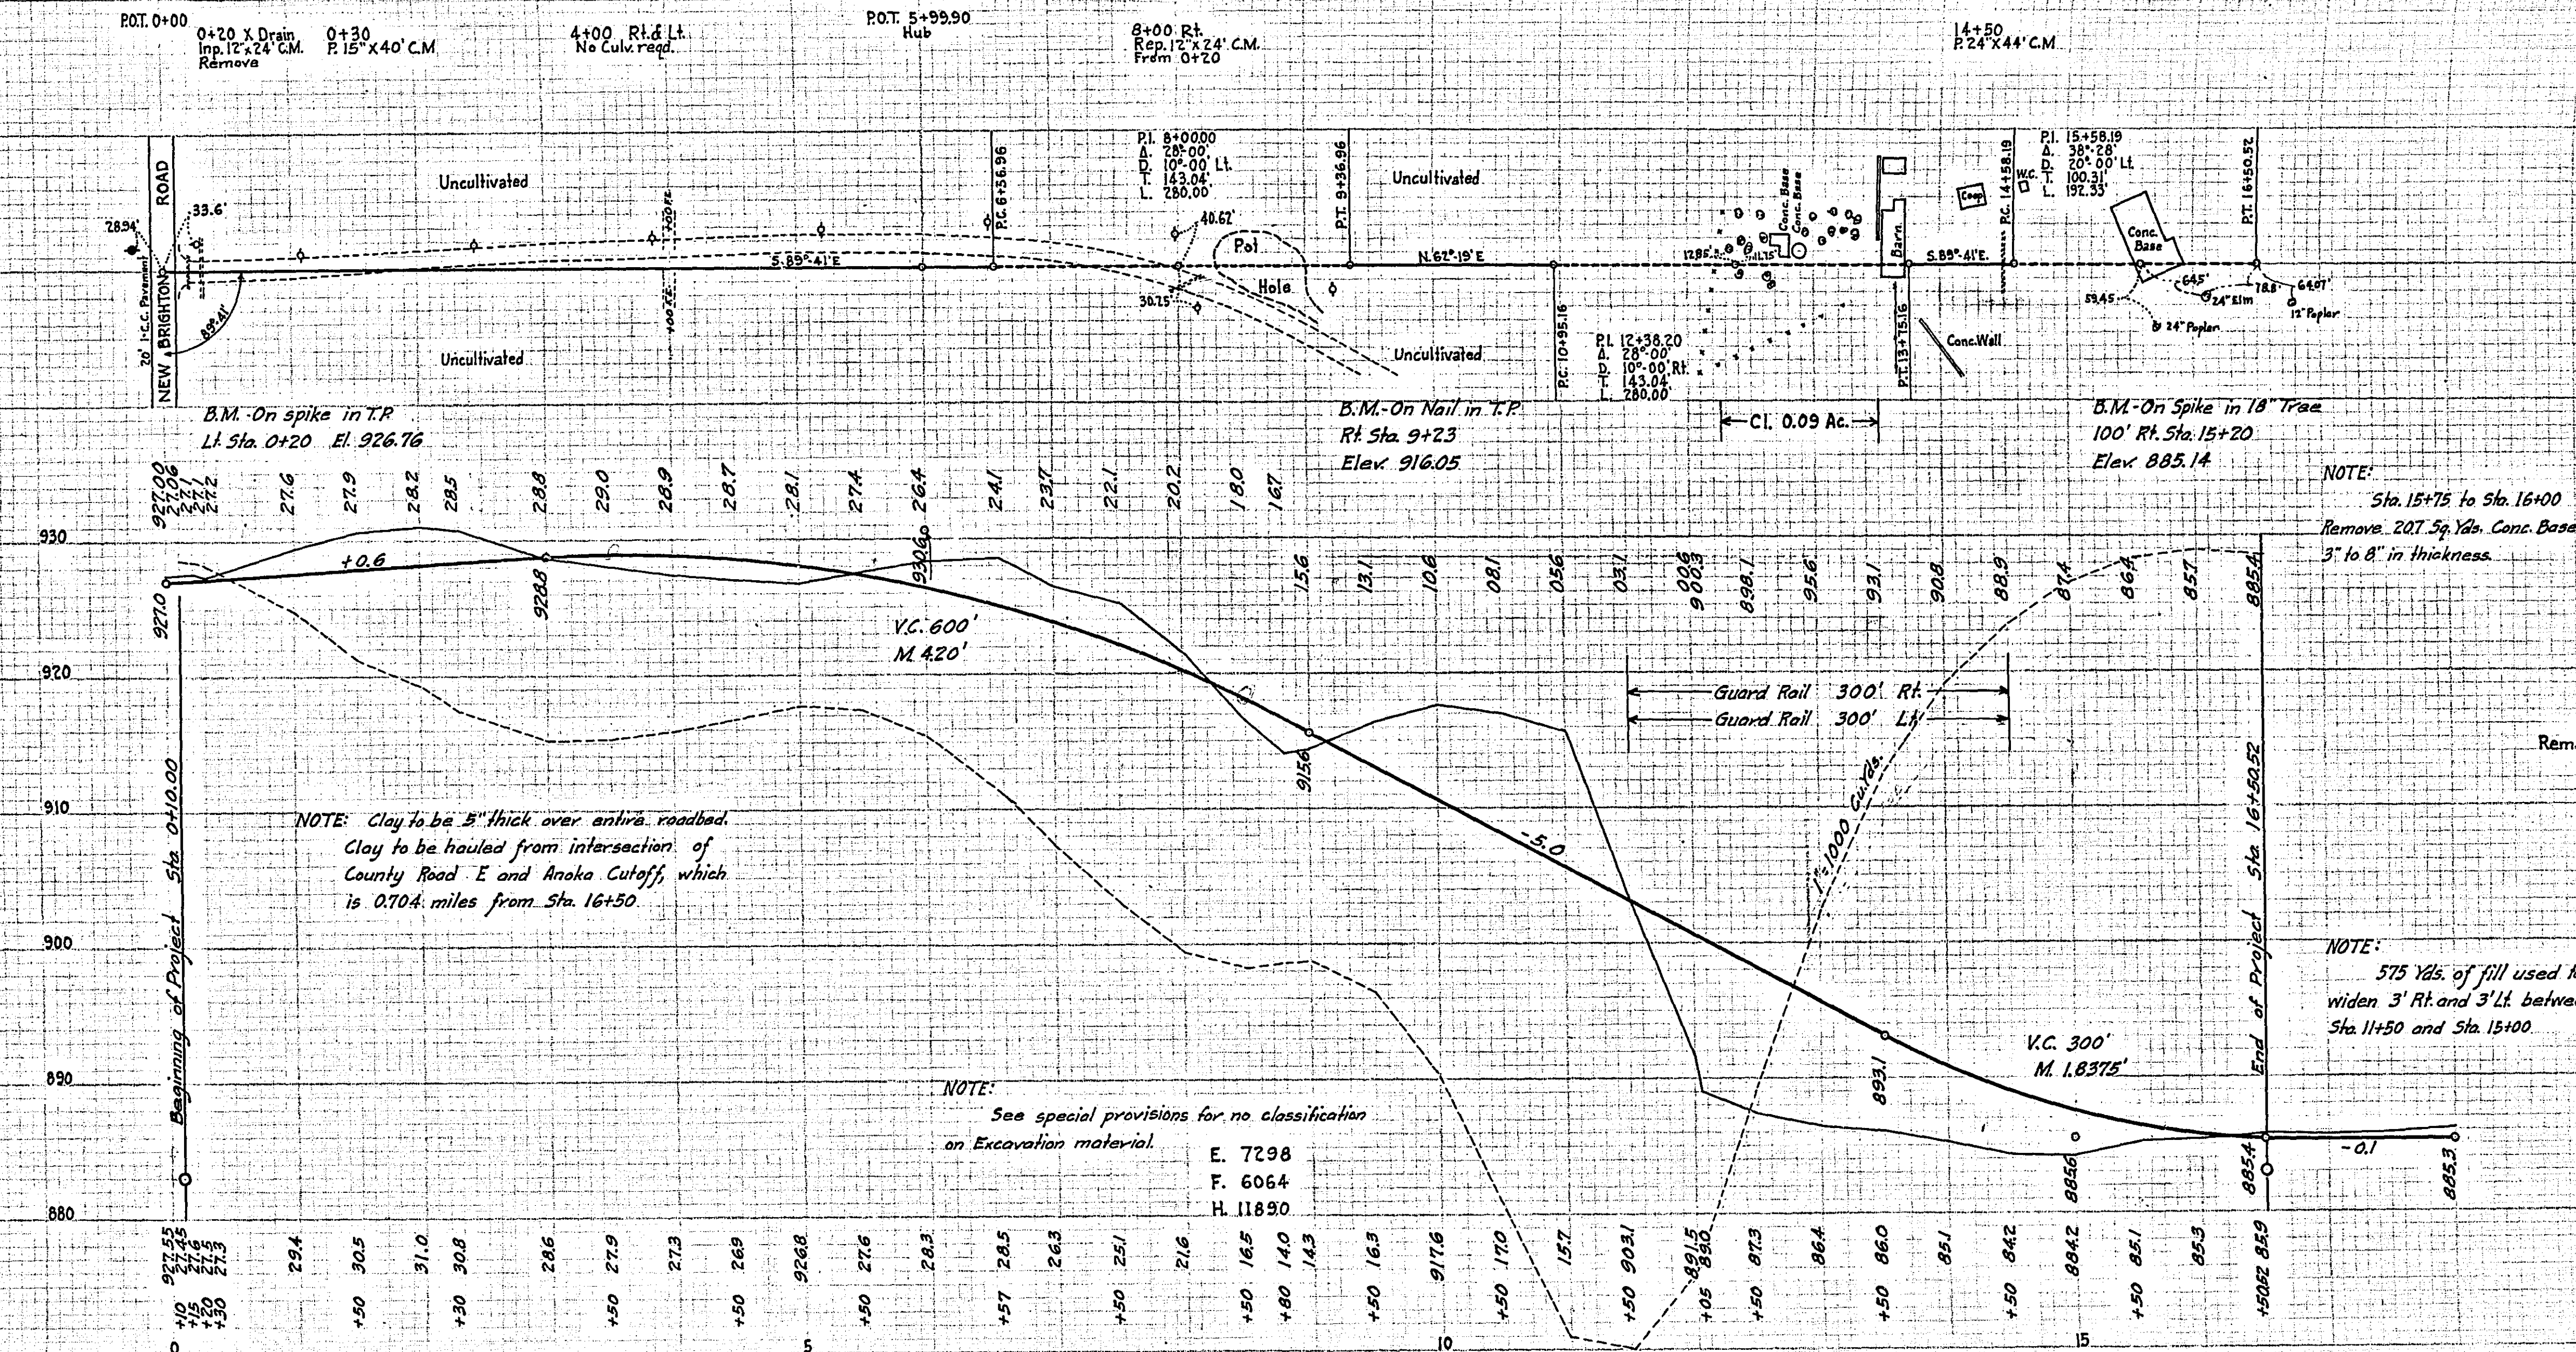

ESTIMATED QUANTITIES PROJECT 29-54

Clearing	Acres	0.09
Exc. E.	Cu. Yds.	7298
" O.H.	"	11890
Place 15" C.M.	Lin. Ft.	40
" 24" C.M.	"	44
Rem. Old Culv.	"	24
Rep. "	"	24
Rem. Conc. Base at Sta. 15+75 3' to 8" thick	Sq. Yds.	207
Guard Rail - Cable	Lin. Ft.	600
" Anchors	Each	4
Clay 5" thick	Cu. Yds.	663
Clay Haul	C.Y. M.	570
Shaping & Compacting	Man Hrs.	42
"	M-T "	97

MICROFILMED
RAMSEY CO. ENGR.

29-54