




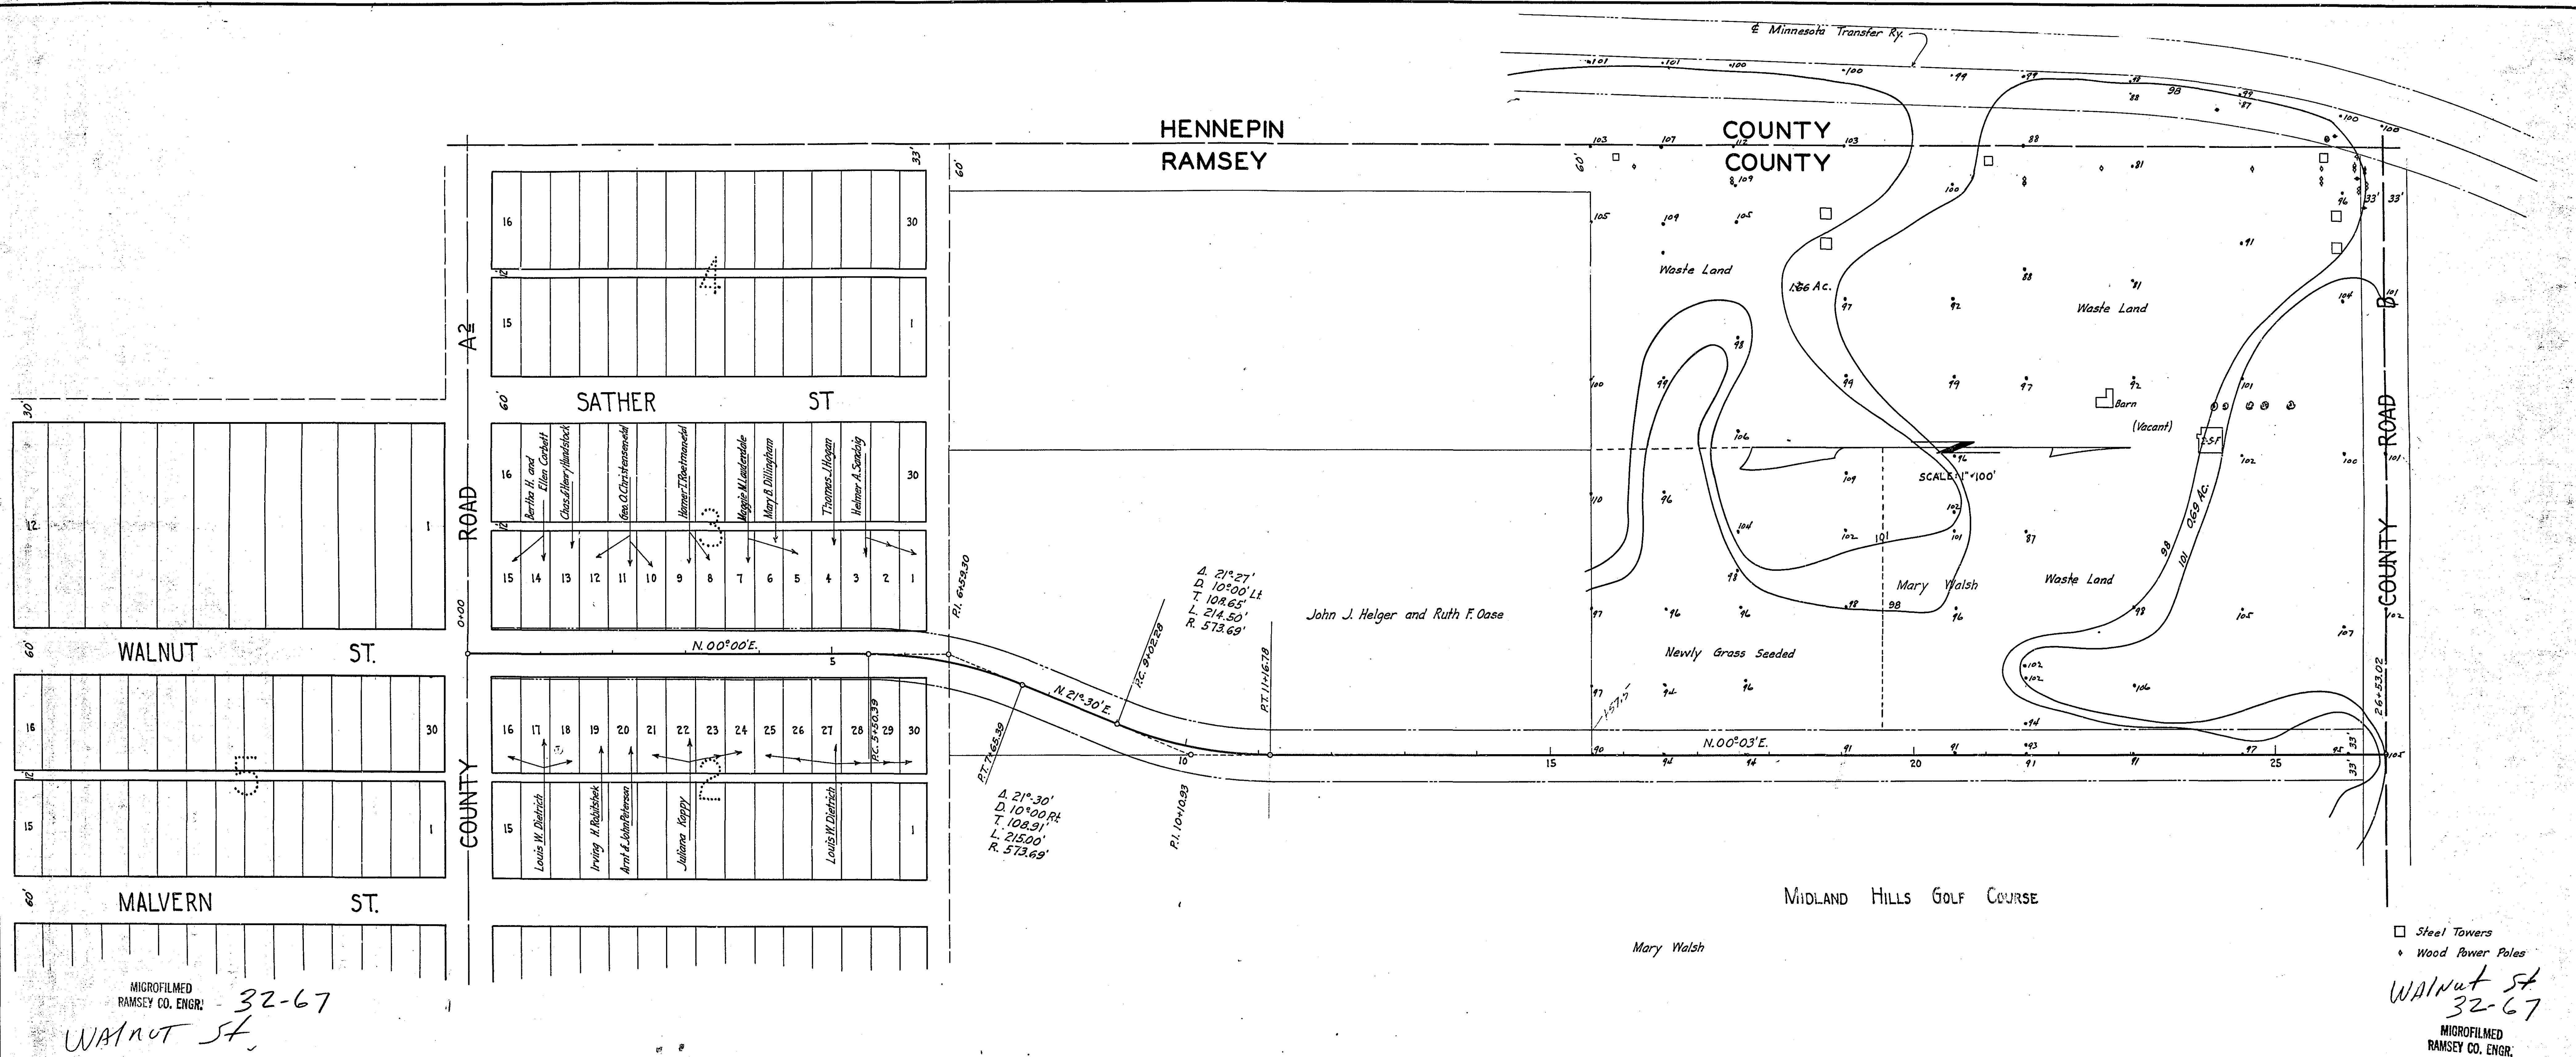

WALNUT STREET
FROM CO. RD. A2 TO CO. RD. B.
PROJ. NO. 32-67

**MICROFILMED
RAMSEY CO. ENGR.**

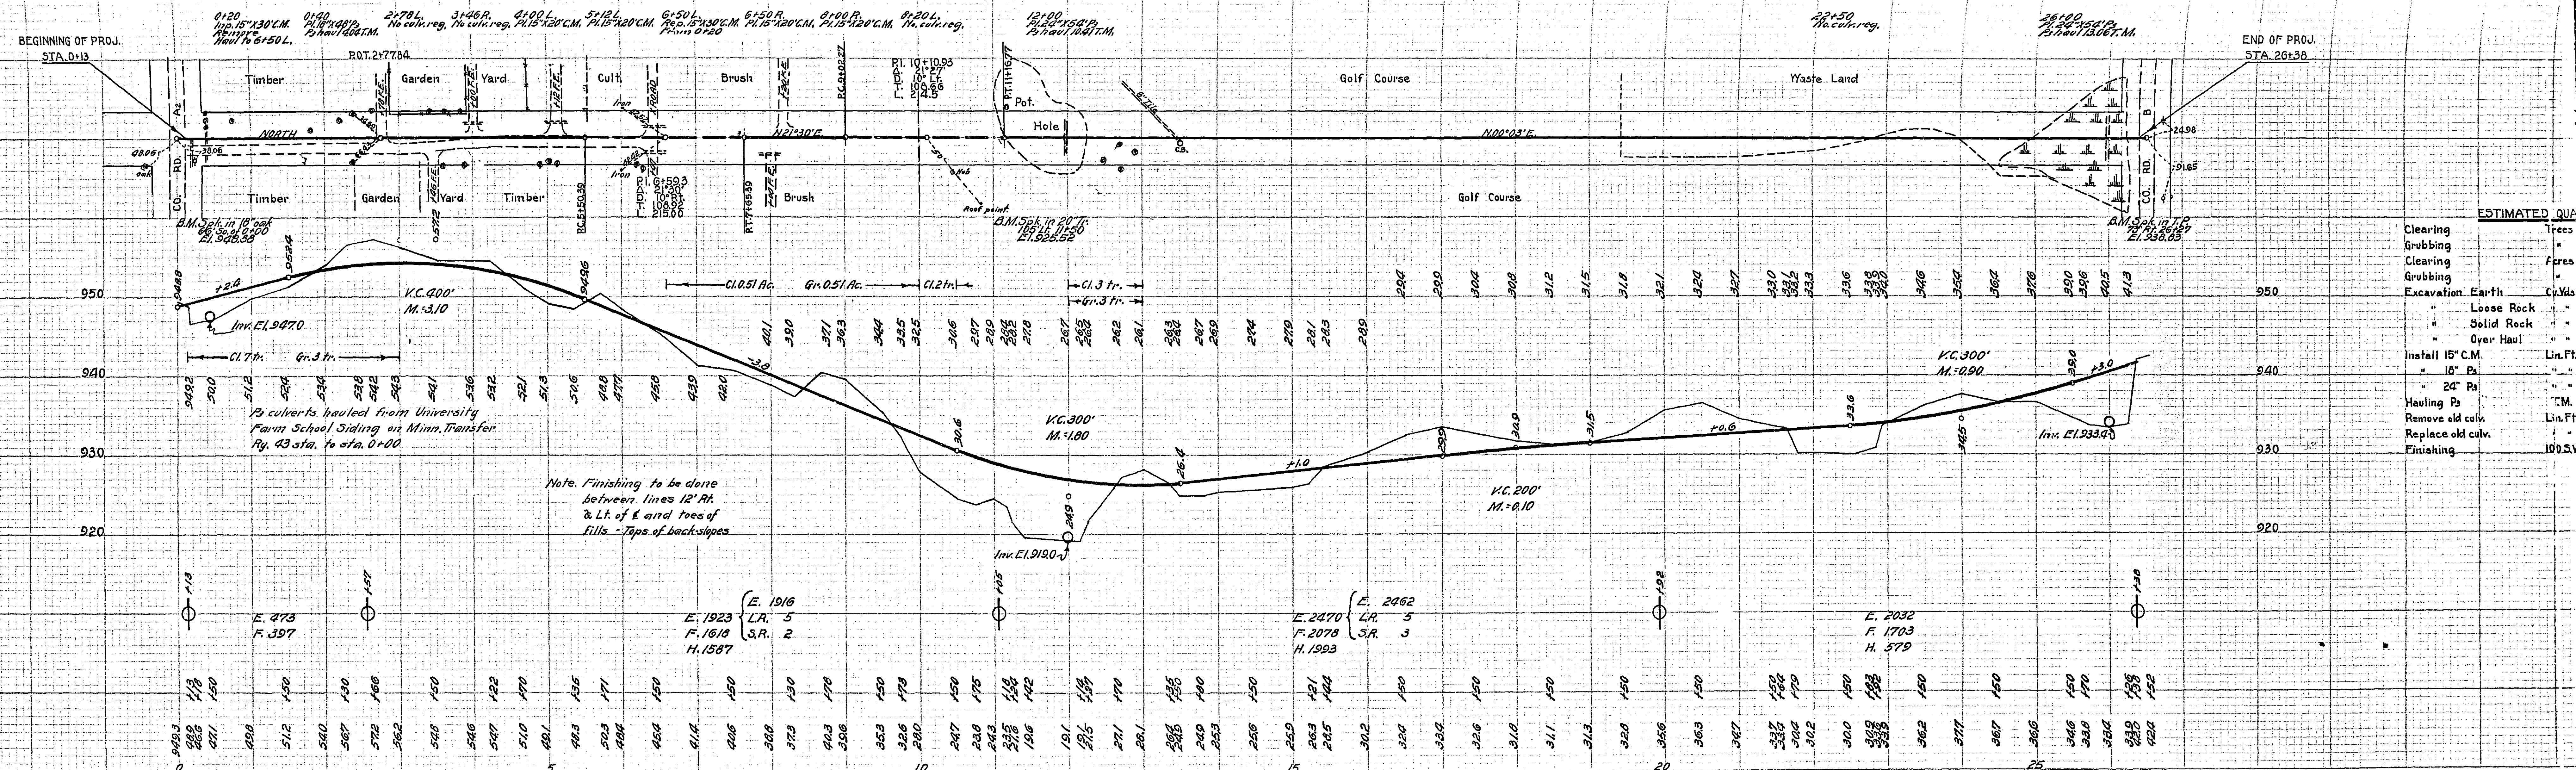

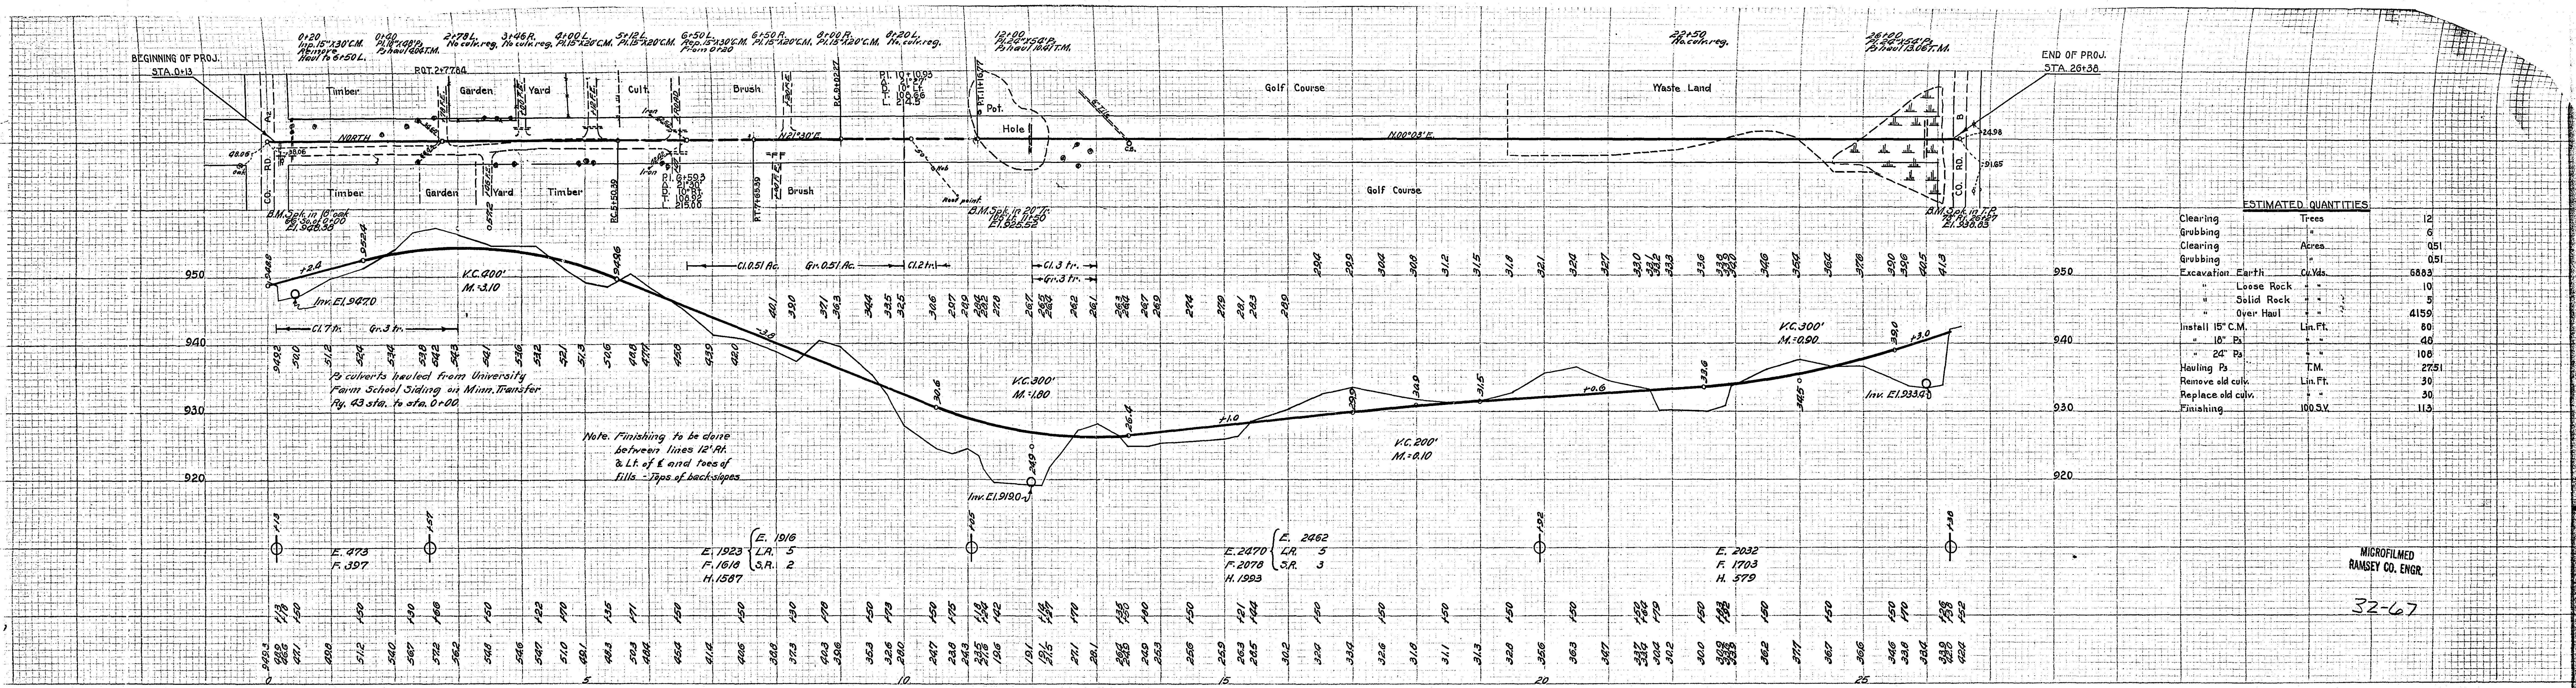

ESTIMATED QUANTITIES			
Clearing	Trees	12	
Grubbing	"	6	
Clearing	Acres	0.51	
Grubbing	"	0.51	
Excavation Earth	Cu.Yds.	6883	
"	Loose Rock	10	
"	Solid Rock	5	
"	Over Haul	4159	
Install 15" C.M.	Lin.Ft.	80	
"	18" Ps	46	
"	24" Ps	108	
Hauling Ps	T.M.	27.51	
Remove old culv.	Lin.Ft.	30	
Replace old culv.	"	30	
Finishing	100.S.Y.	113	

Note: Finishing to be done between lines 12' Rt. & Lt. of E and toes of fills - Tops of back-slopes

MICROFILMED
RAMSEY CO. ENGR.

32-67