


FOURTH STREET

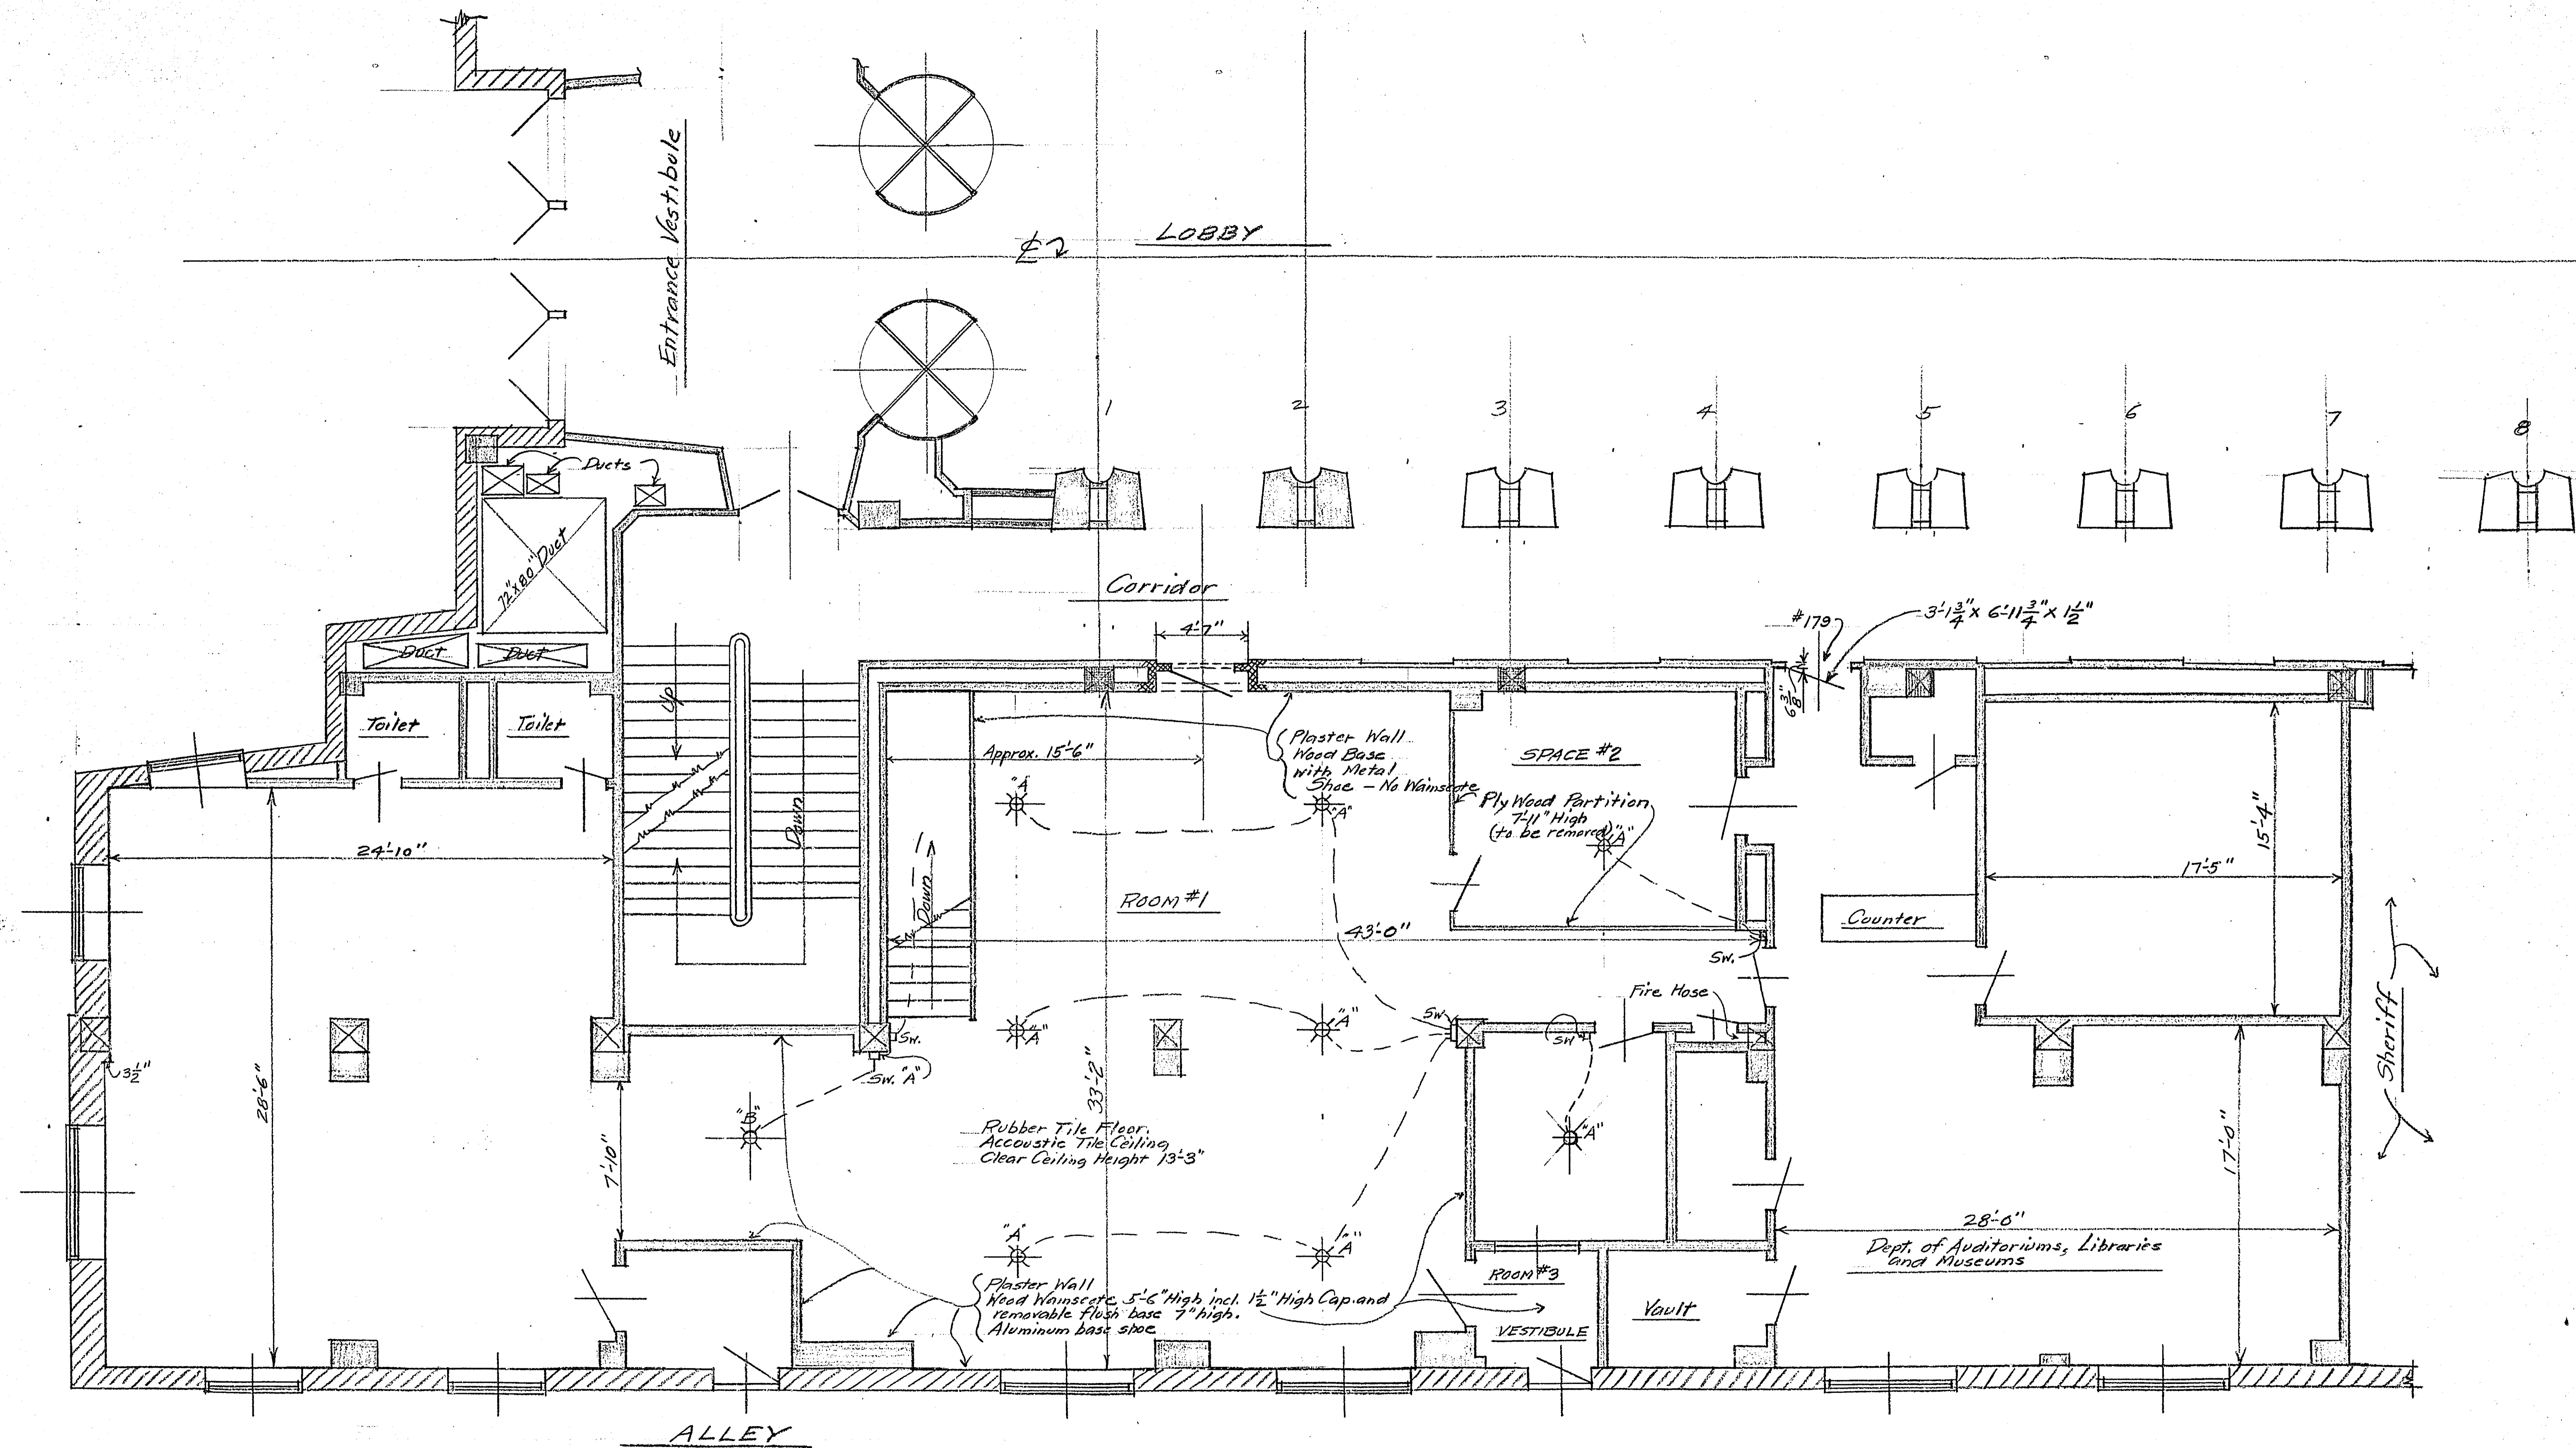

ALLEY

LAYOUT OF OFFICE SPACE ON N.W. CORNER OF FIRST FLOOR  
OF  
CITY HALL AND COURT HOUSE  
ST. PAUL, MINN  
SCALE  $\frac{1}{4}'' = 1'-0''$  OCT. 1952

**SPECIFICATIONS**

Work to be Done: Work will consist of General and Electrical Work only in Room #1, Space #2 and Room #3 as shown on this Sheet #2.

General Work: Remove and turn over to the Court House Custodian the present plywood partition around Space #2. Also near top of present wood wainscot in Room #3 install Coat Hooks 8" o.c. Hooks to be #522 Cast Iron Lockwood Coat Hooks.

Electrical Work: Present fixtures shown thus  $\otimes$  (8 fixtures) will be taken down and turned over to the Court House Custodian. They will be replaced with new fluorescent fixtures. New fixtures will be #VF 9441 (4-pin tubes) fixtures complete with Shield, Canopy and 24" stems. Virden Line, same as those now installed in Office of the Veterans Service Officer in the Court House Basement. New fixtures to be erected complete with tubes.

Present fixture shown thus  $\otimes$  will be left in place. However Sw. A will be cut off from fixture and fixture will be equipped with a pull chain for operation from floor.