
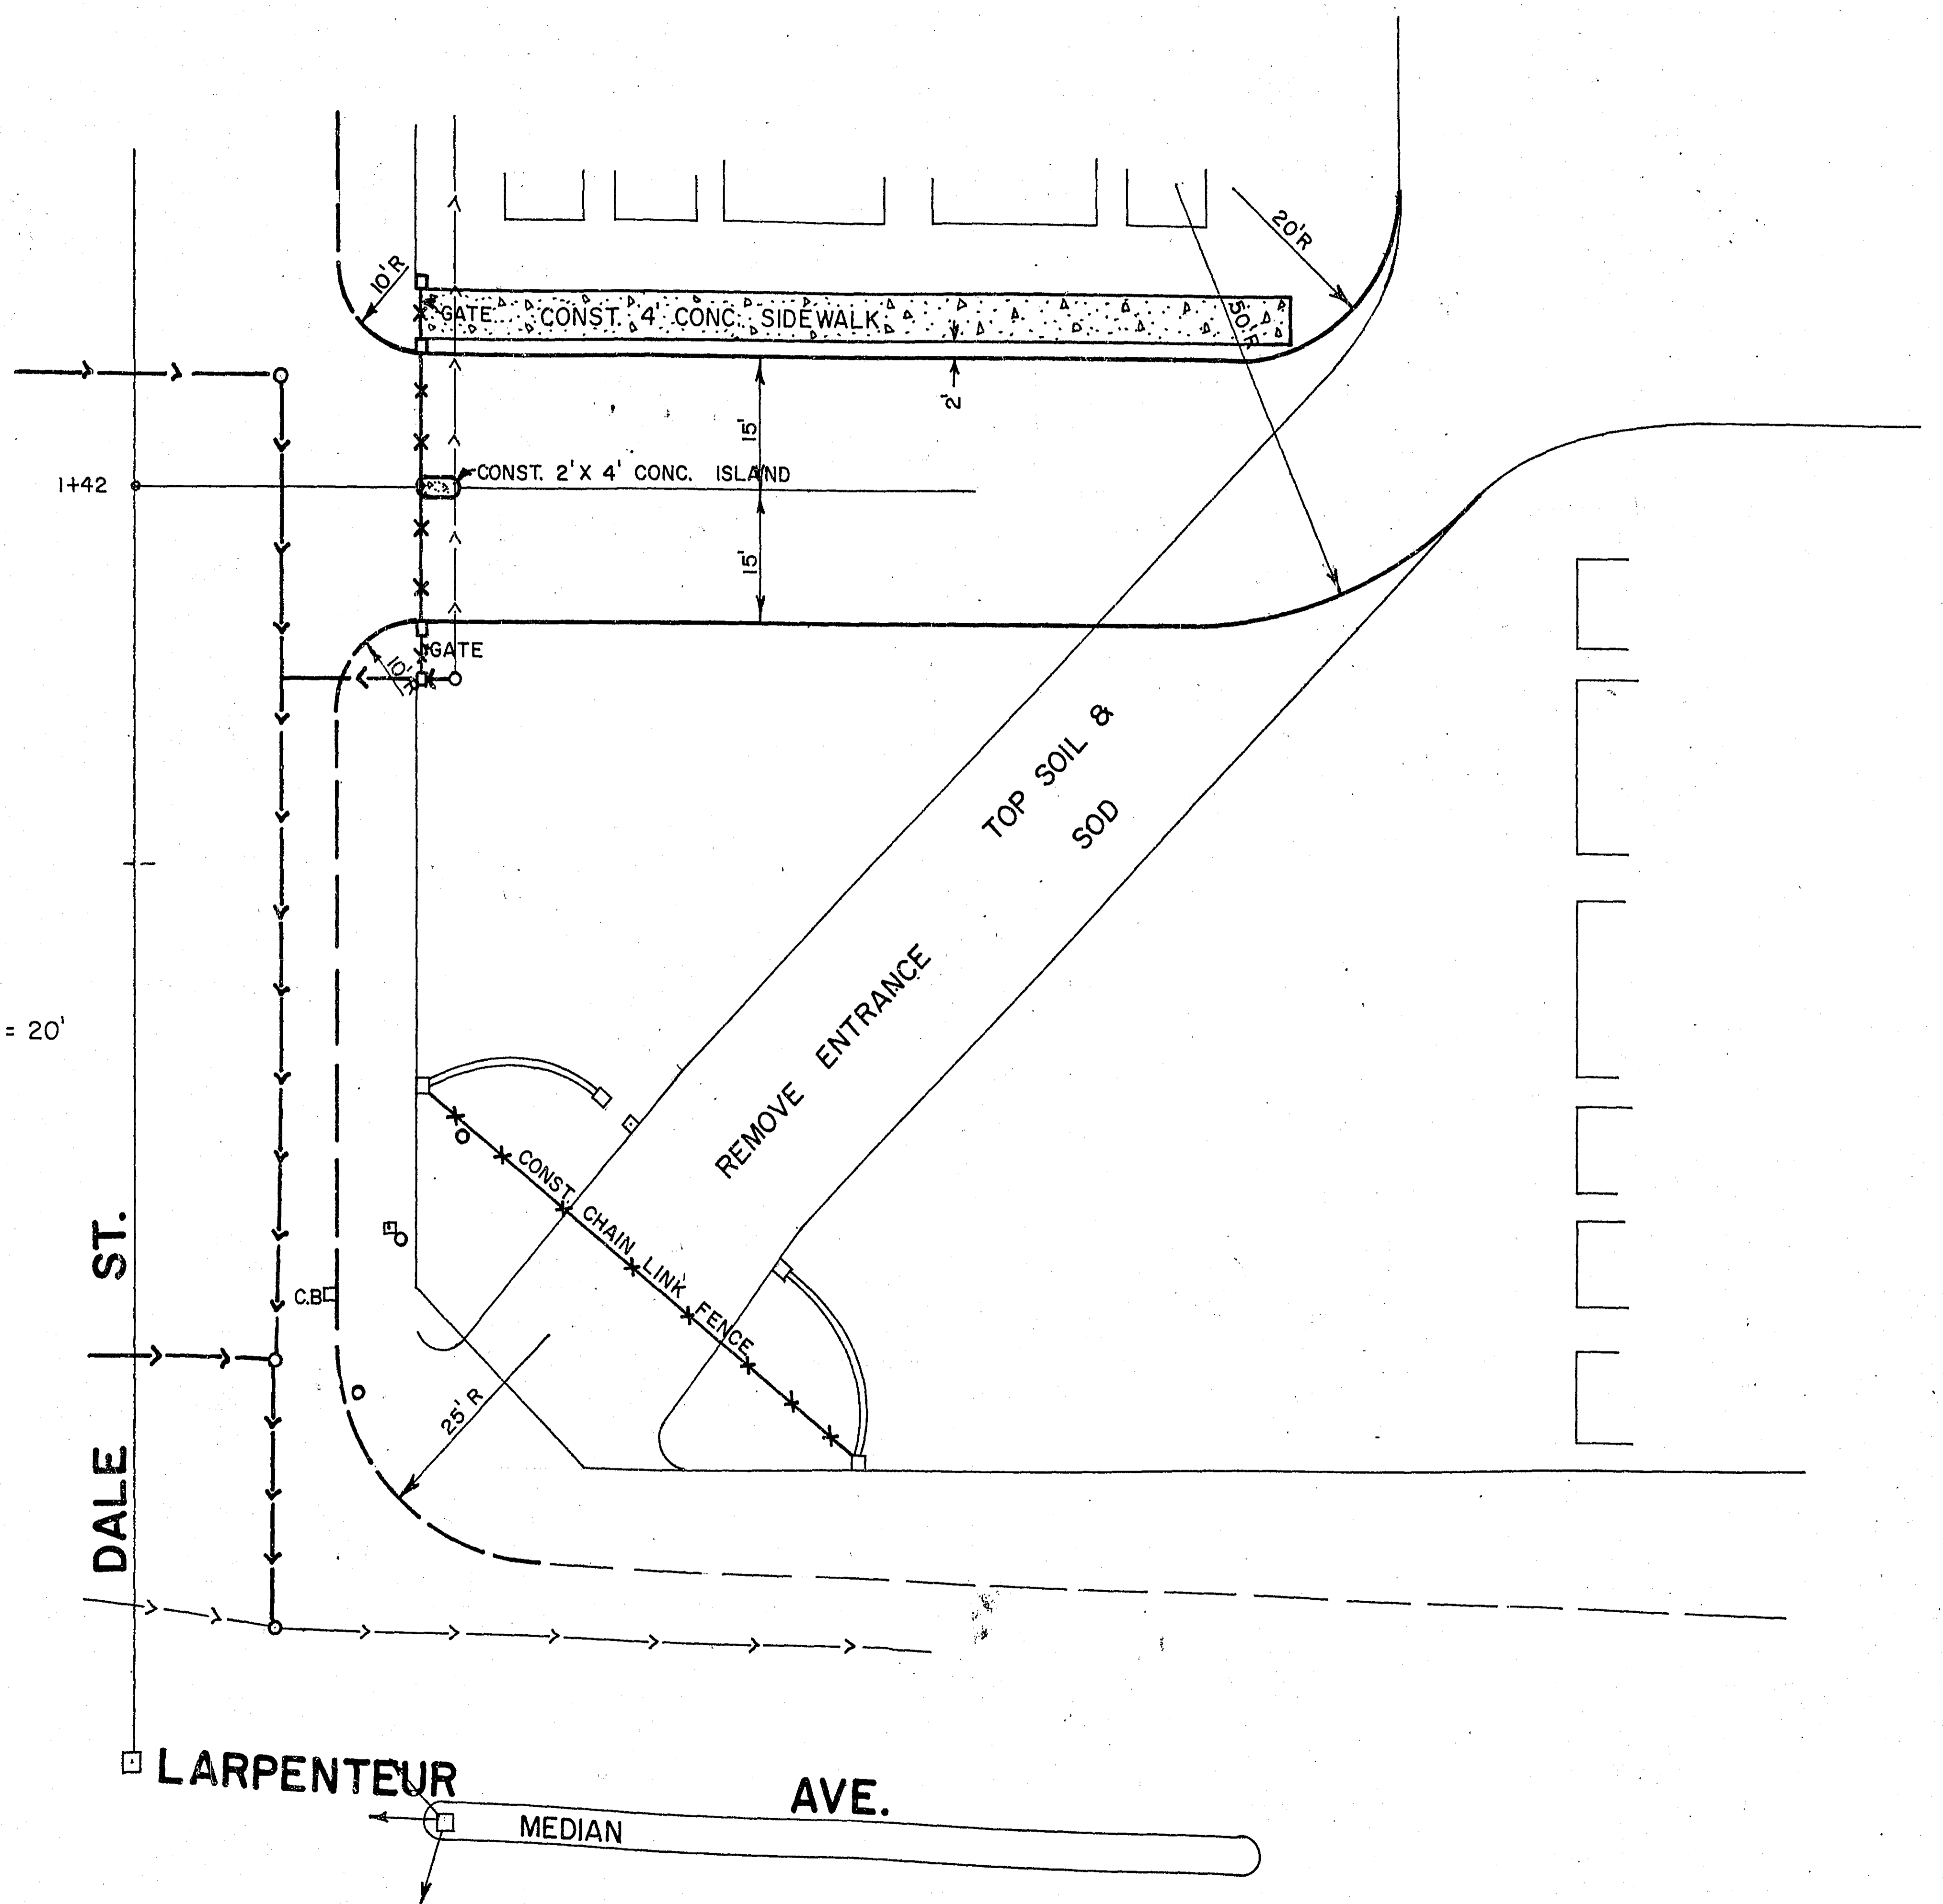


6.830

TEMPLE OF AARON CEMETERY ENTRANCE RELOCATION

ESTIMATED QUANTITIES		
DESCRIPTION	UNIT	QUANTITY
REMOVE BIT. PAVEMENT AND SURFACING	SQ. YD.	391
CLASS A EXCAVATION	CU. YD.	125
TOP SOIL COVERING	CU. YD.	35
GRAVEL SUB-BASE IN PLACE (CLASS 4)	TON	71
BIT. MATERIAL FOR PRIME COAT	GAL	110
1/2" BIT MATERIAL FOR WEARING COURSE	TON	27
CONCRETE WALK 4" THICK, 4' WIDE	SQ. FT.	560
CHAIN LINK FENCE (STEEL FABRIC) 72"	L. F.	66
PEDESTRIAN GATES	GATE	2
VEHICULAR GATES	GATE	2
SODDING	SQ. YD.	400
PRE-CAST CURB	L. F.	260
CONCRETE MEDIAN	SQ. YD.	1

SCALE: 1" = 20'

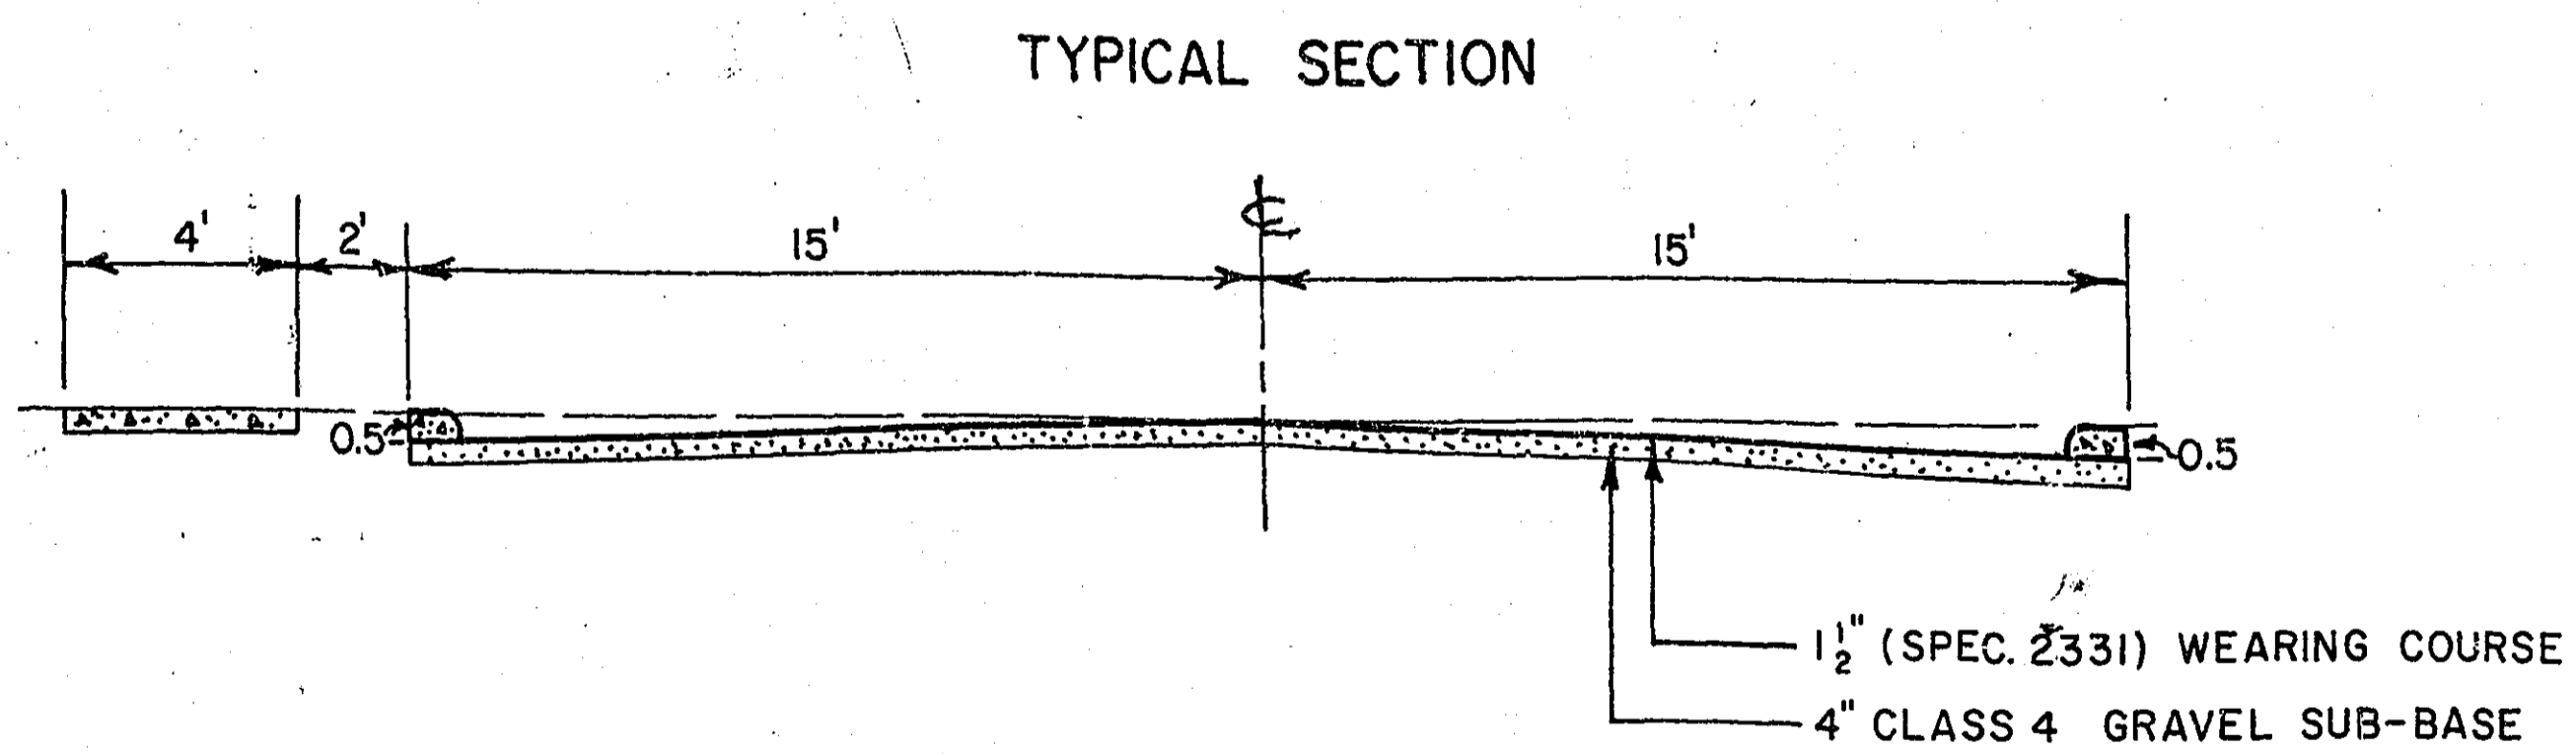

R-830

