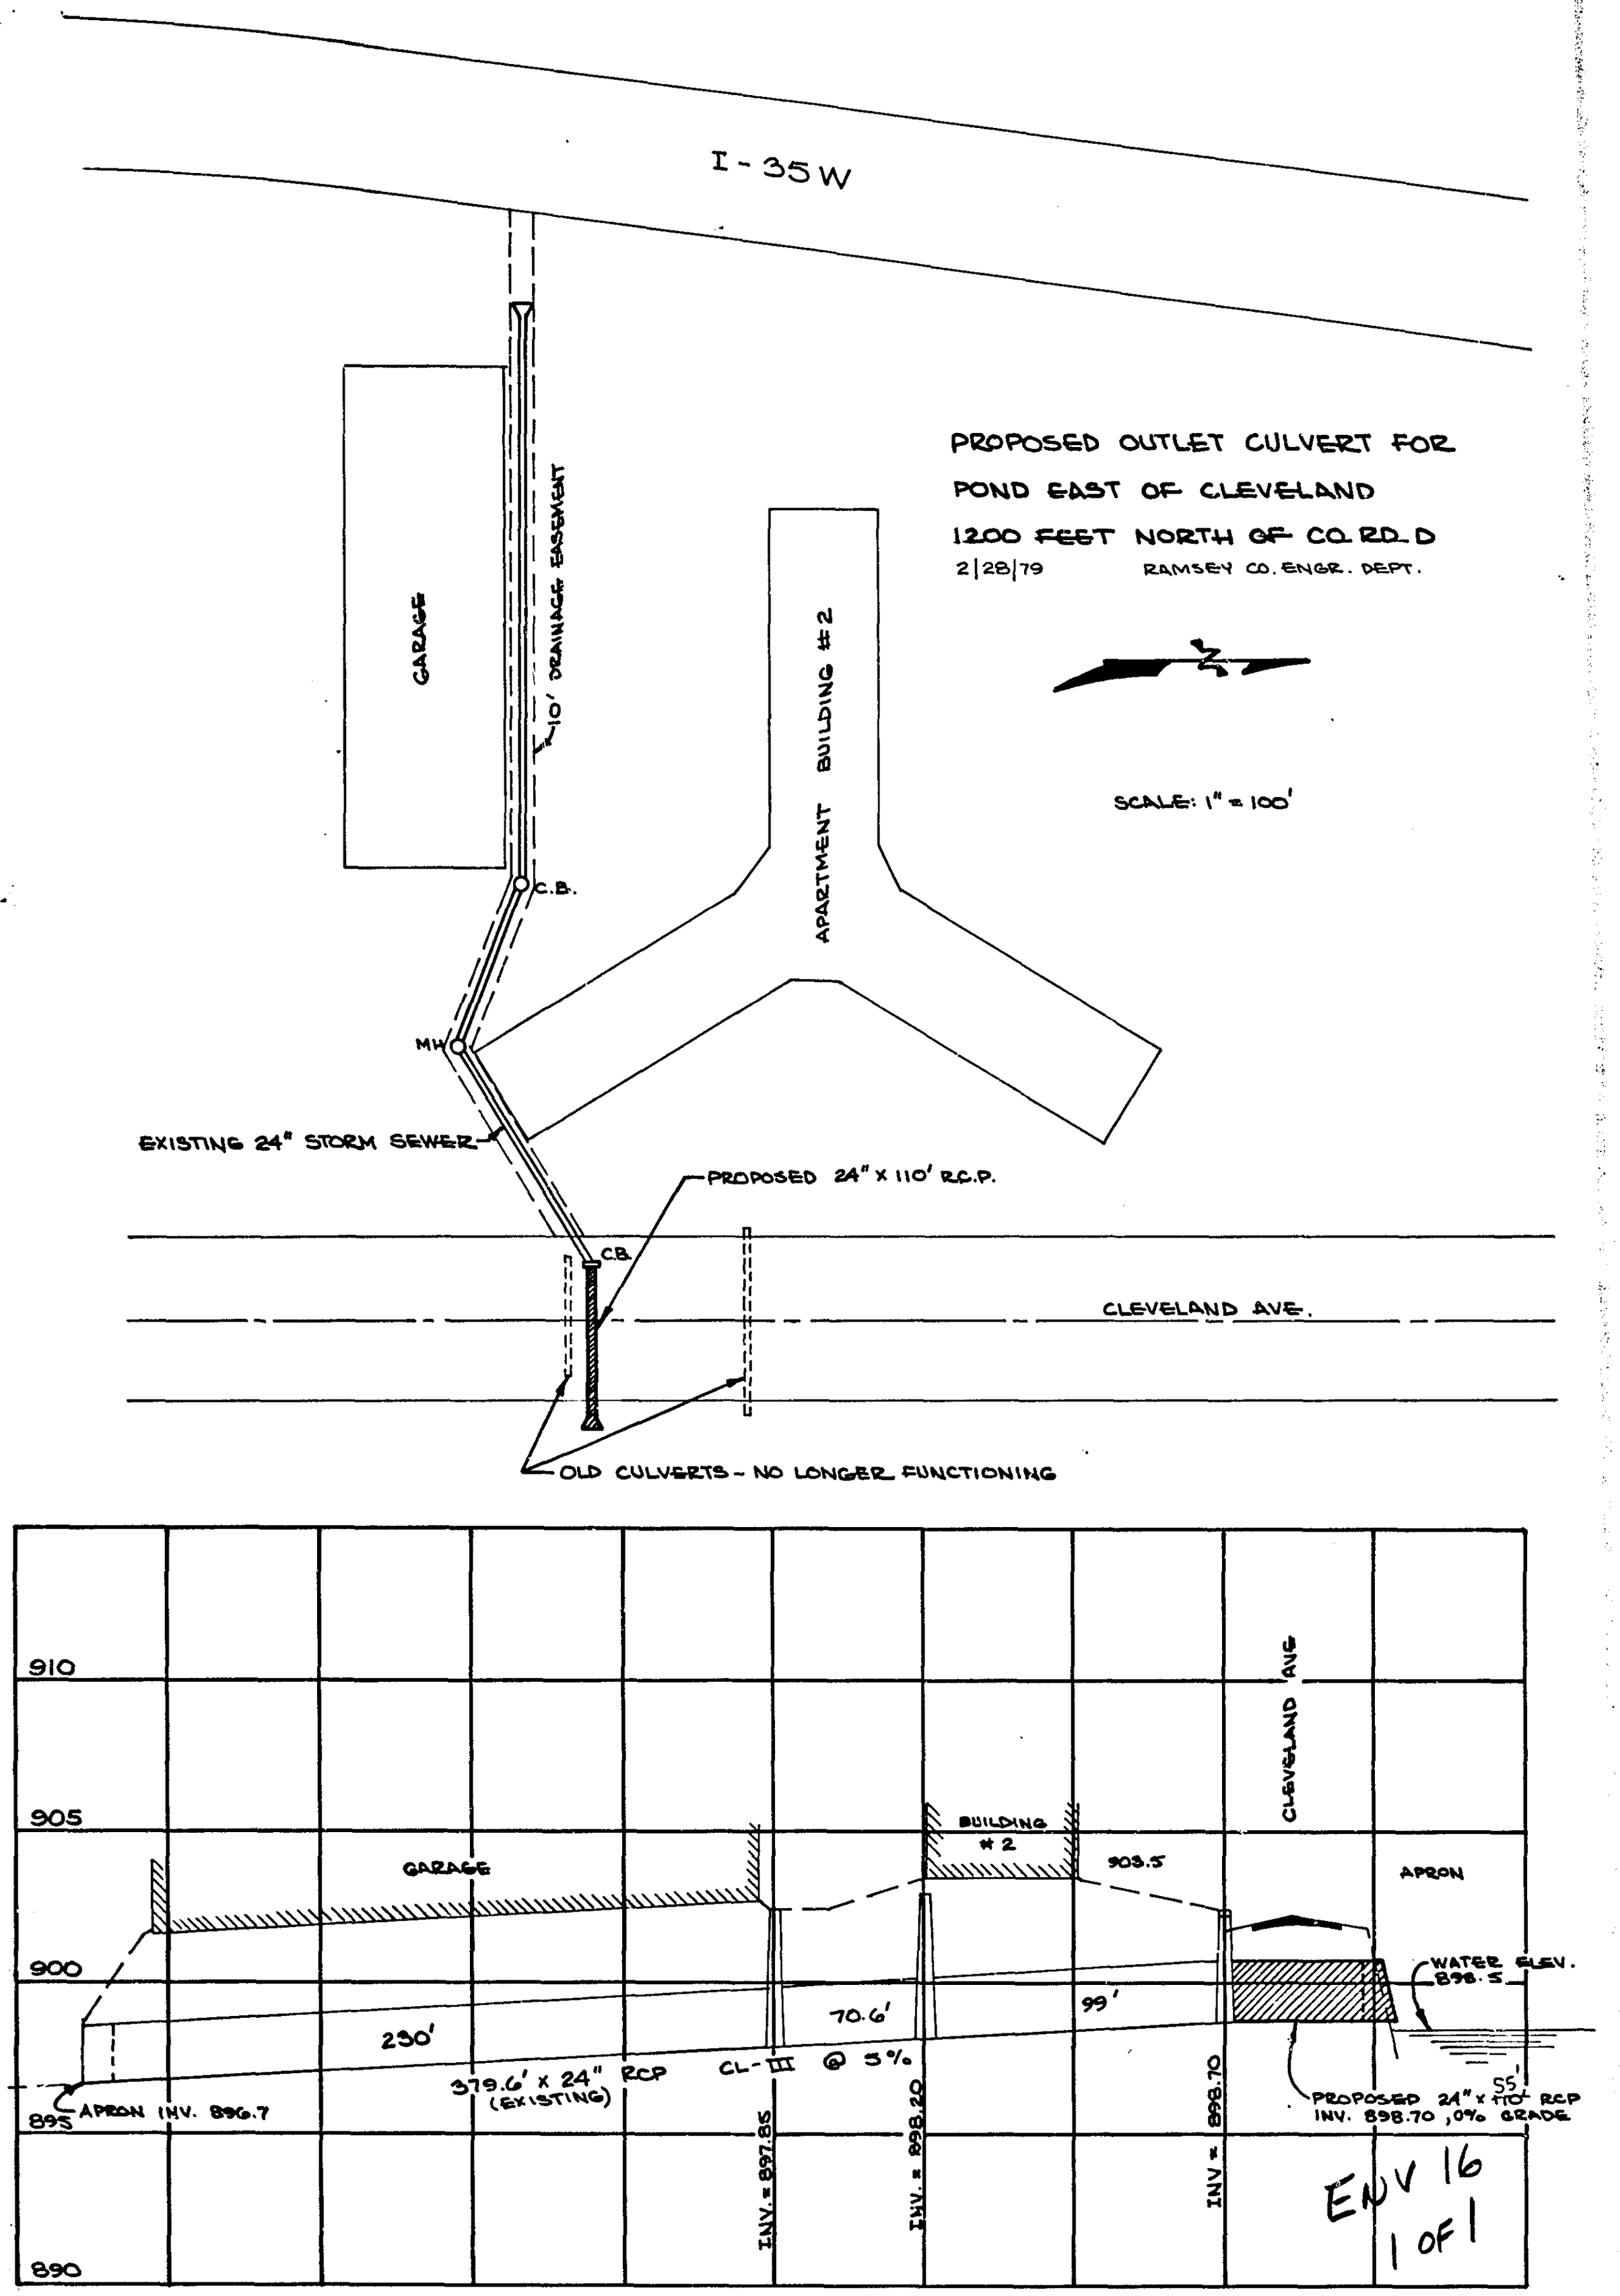
I-35W
PROPOSED OUTLET CULVERT FOR
POND EAST OF CLEVELAND
1200 FEET NORTH OF CO. RD. D
2/28/79
RAMSEY CO. ENGR. DEPT.
SCALE: 1" = 100'
GARAGE
10' DRAINAGE EASEMENT
APARTMENT BUILDING #2
C.B.
MH
EXISTING 24" STORM SEWER
PROPOSED 24" X 110' R.C.P.
C.B.
CLEVELAND AVE.
OLD CULVERTS - NO LONGER FUNCTIONING
910
905
900
895
890
CLEVELAND AVE
BUILDING #2
GARAGE
903.5
APRON
WATER ELEV. 898.5
70.6'
99'
230'
379.6' x 24" RCP (EXISTING)
CL-III @ 3%
APRON INV. 896.7
INV. = 897.85
INV. = 898.20
INV = 898.70
PROPOSED 24" x 110' RCP
INV. 898.70, 0% GRADE
ENV 16
1 OF 1